


**TIMBER SLEEPER WALL**  
(COMMUNITY AREA)


SECTIONS A-A  
SCALE 1:10

Timber sleeper retaining wall next to asphalt/ soft landscape

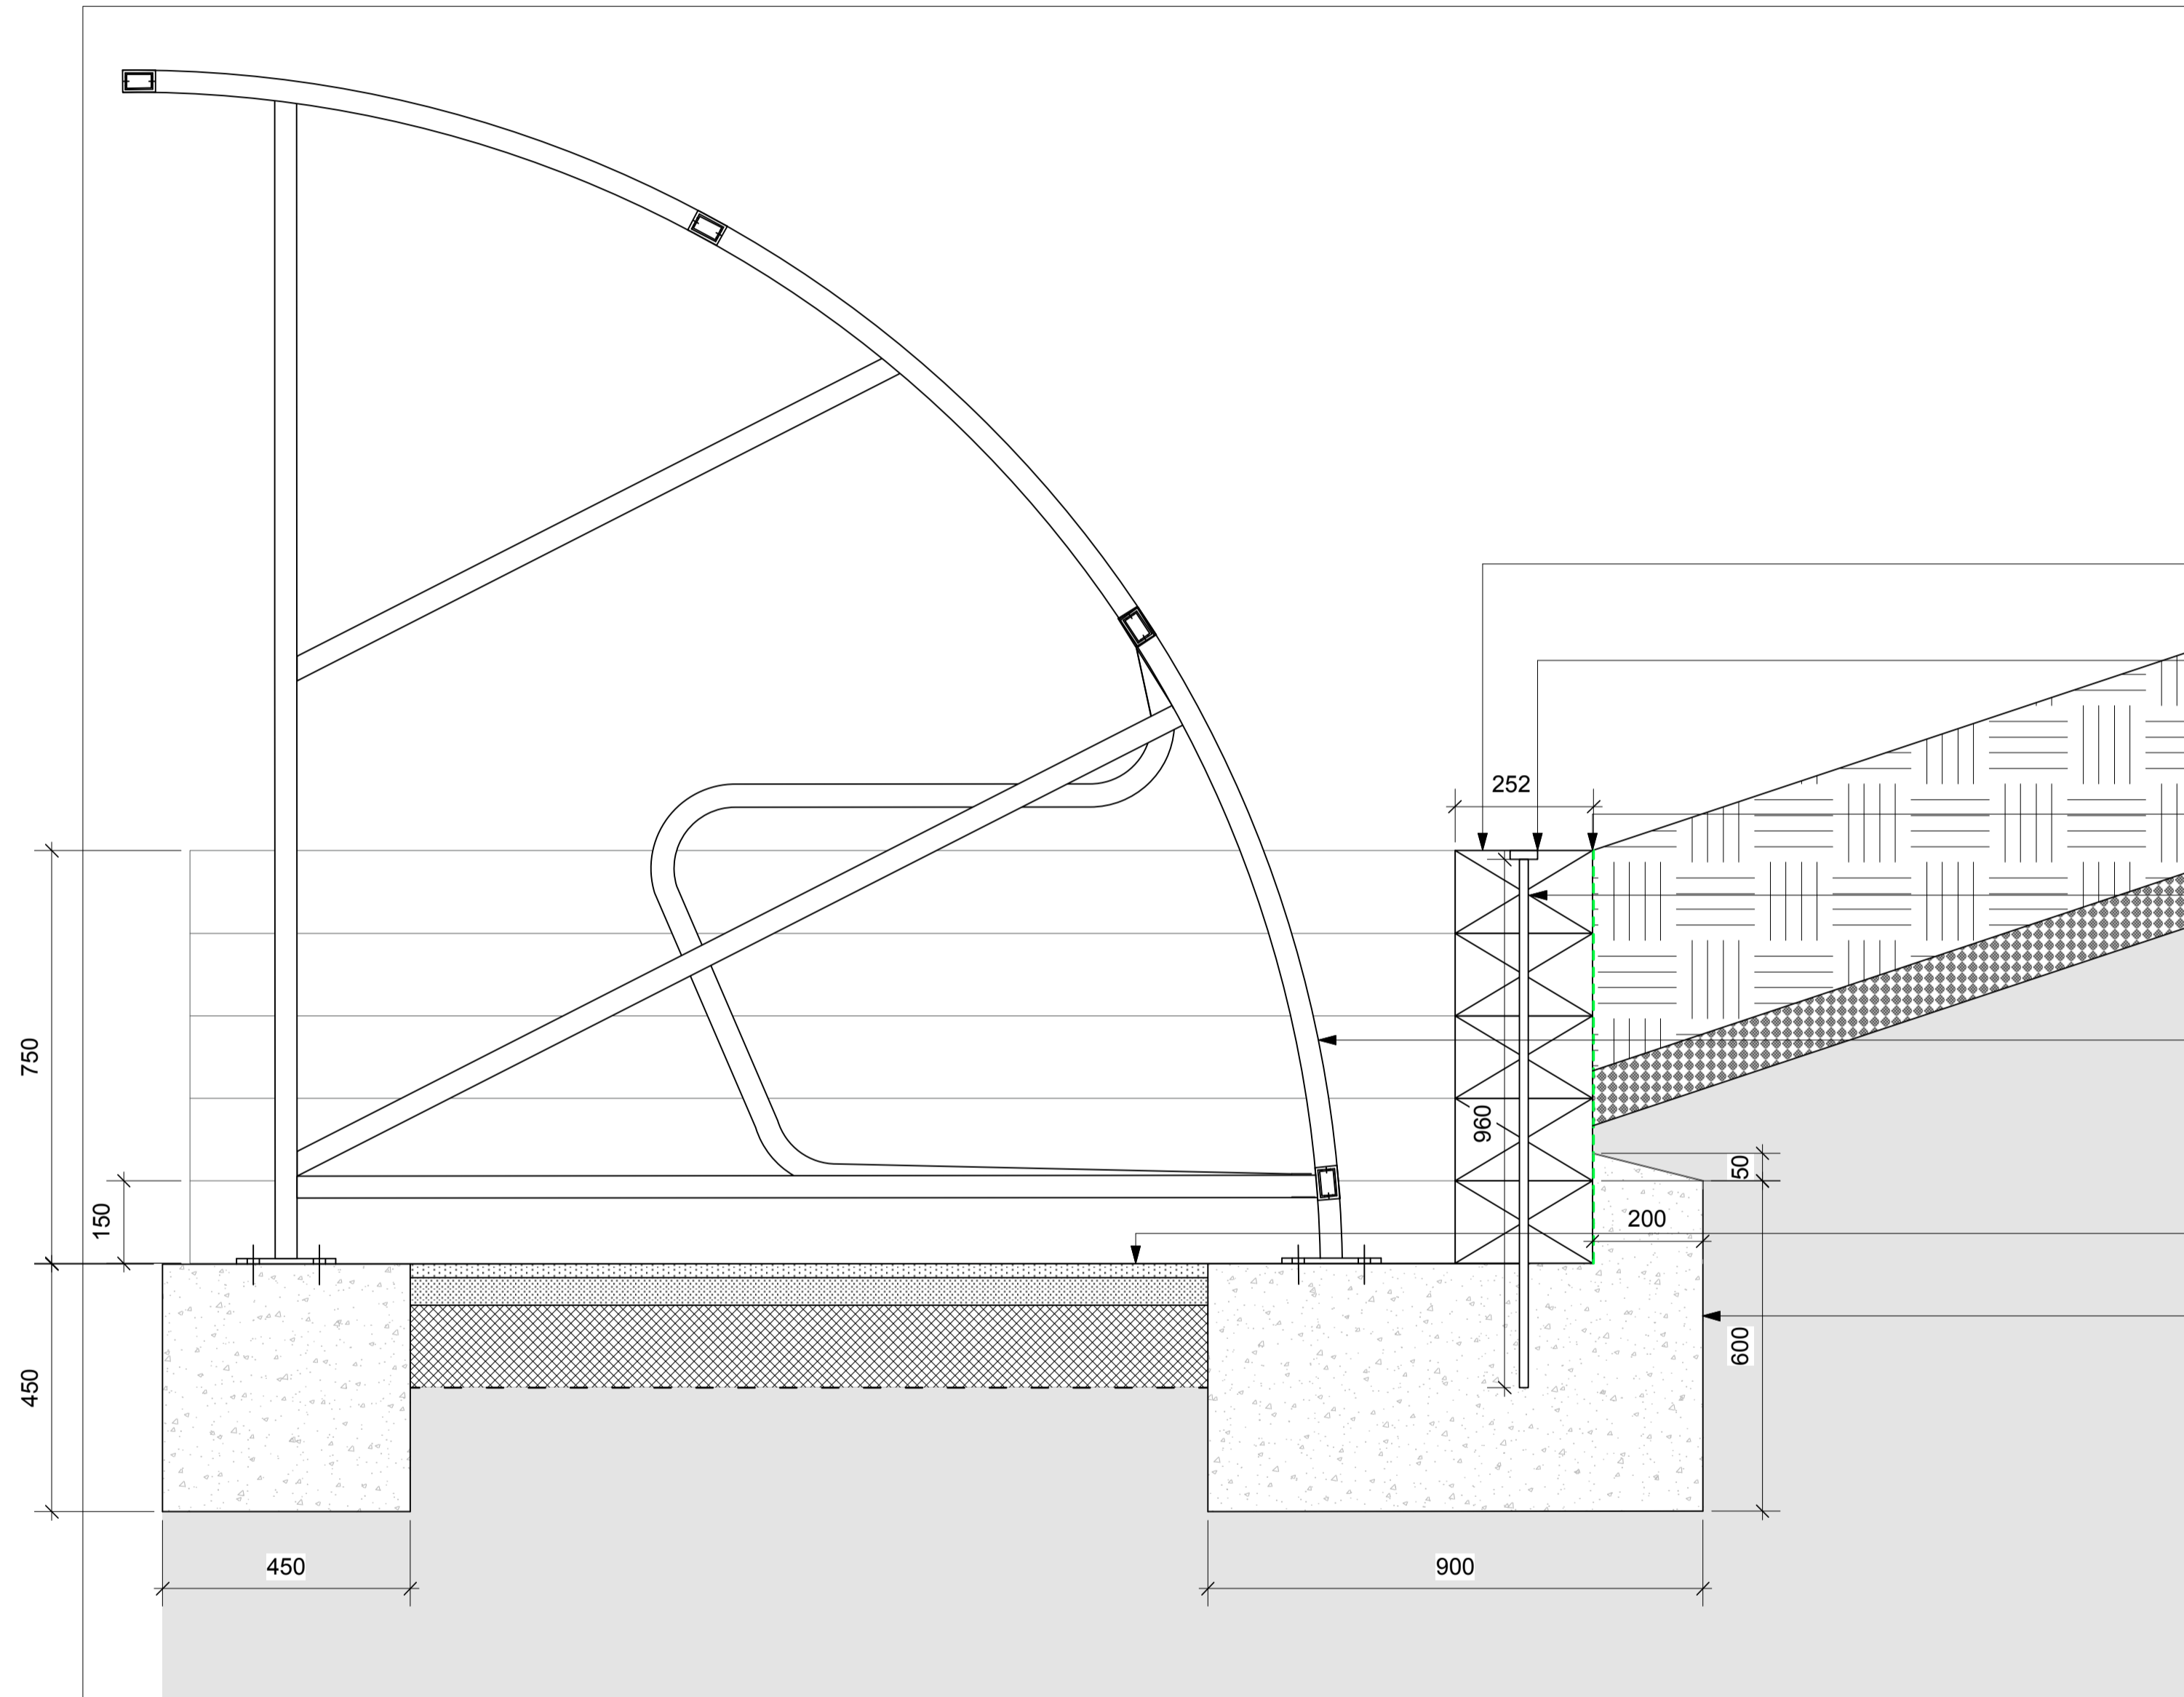

- 150mm x 250mm pressure treated softwood sleepers forming retaining wall 750mm ht.
- Steel dowel top 16mm (ht) x 50mm diam. countersunk in pressure treated softwood
- 400mm topsoil on 100mm free drain layer (gravel)
- On timber's exposed side to the planting apply two coats of R.I.W.
- 16mm x 960mm steel dowel fixing timber sleepers on concrete foundations
- Bike shelter  
Refer to current revision of product list KL037.F.Doc04.LPL (product LP01)
- Pedestrian asphalt surface:  
Refer to current revision of detail KL037.F.SD.101B
- Concrete pad foundations for timber sleeper retaining wall and cycle store connected.  
Refer to engineer's drawings

LOCATION PLAN  
SCALE 1:50

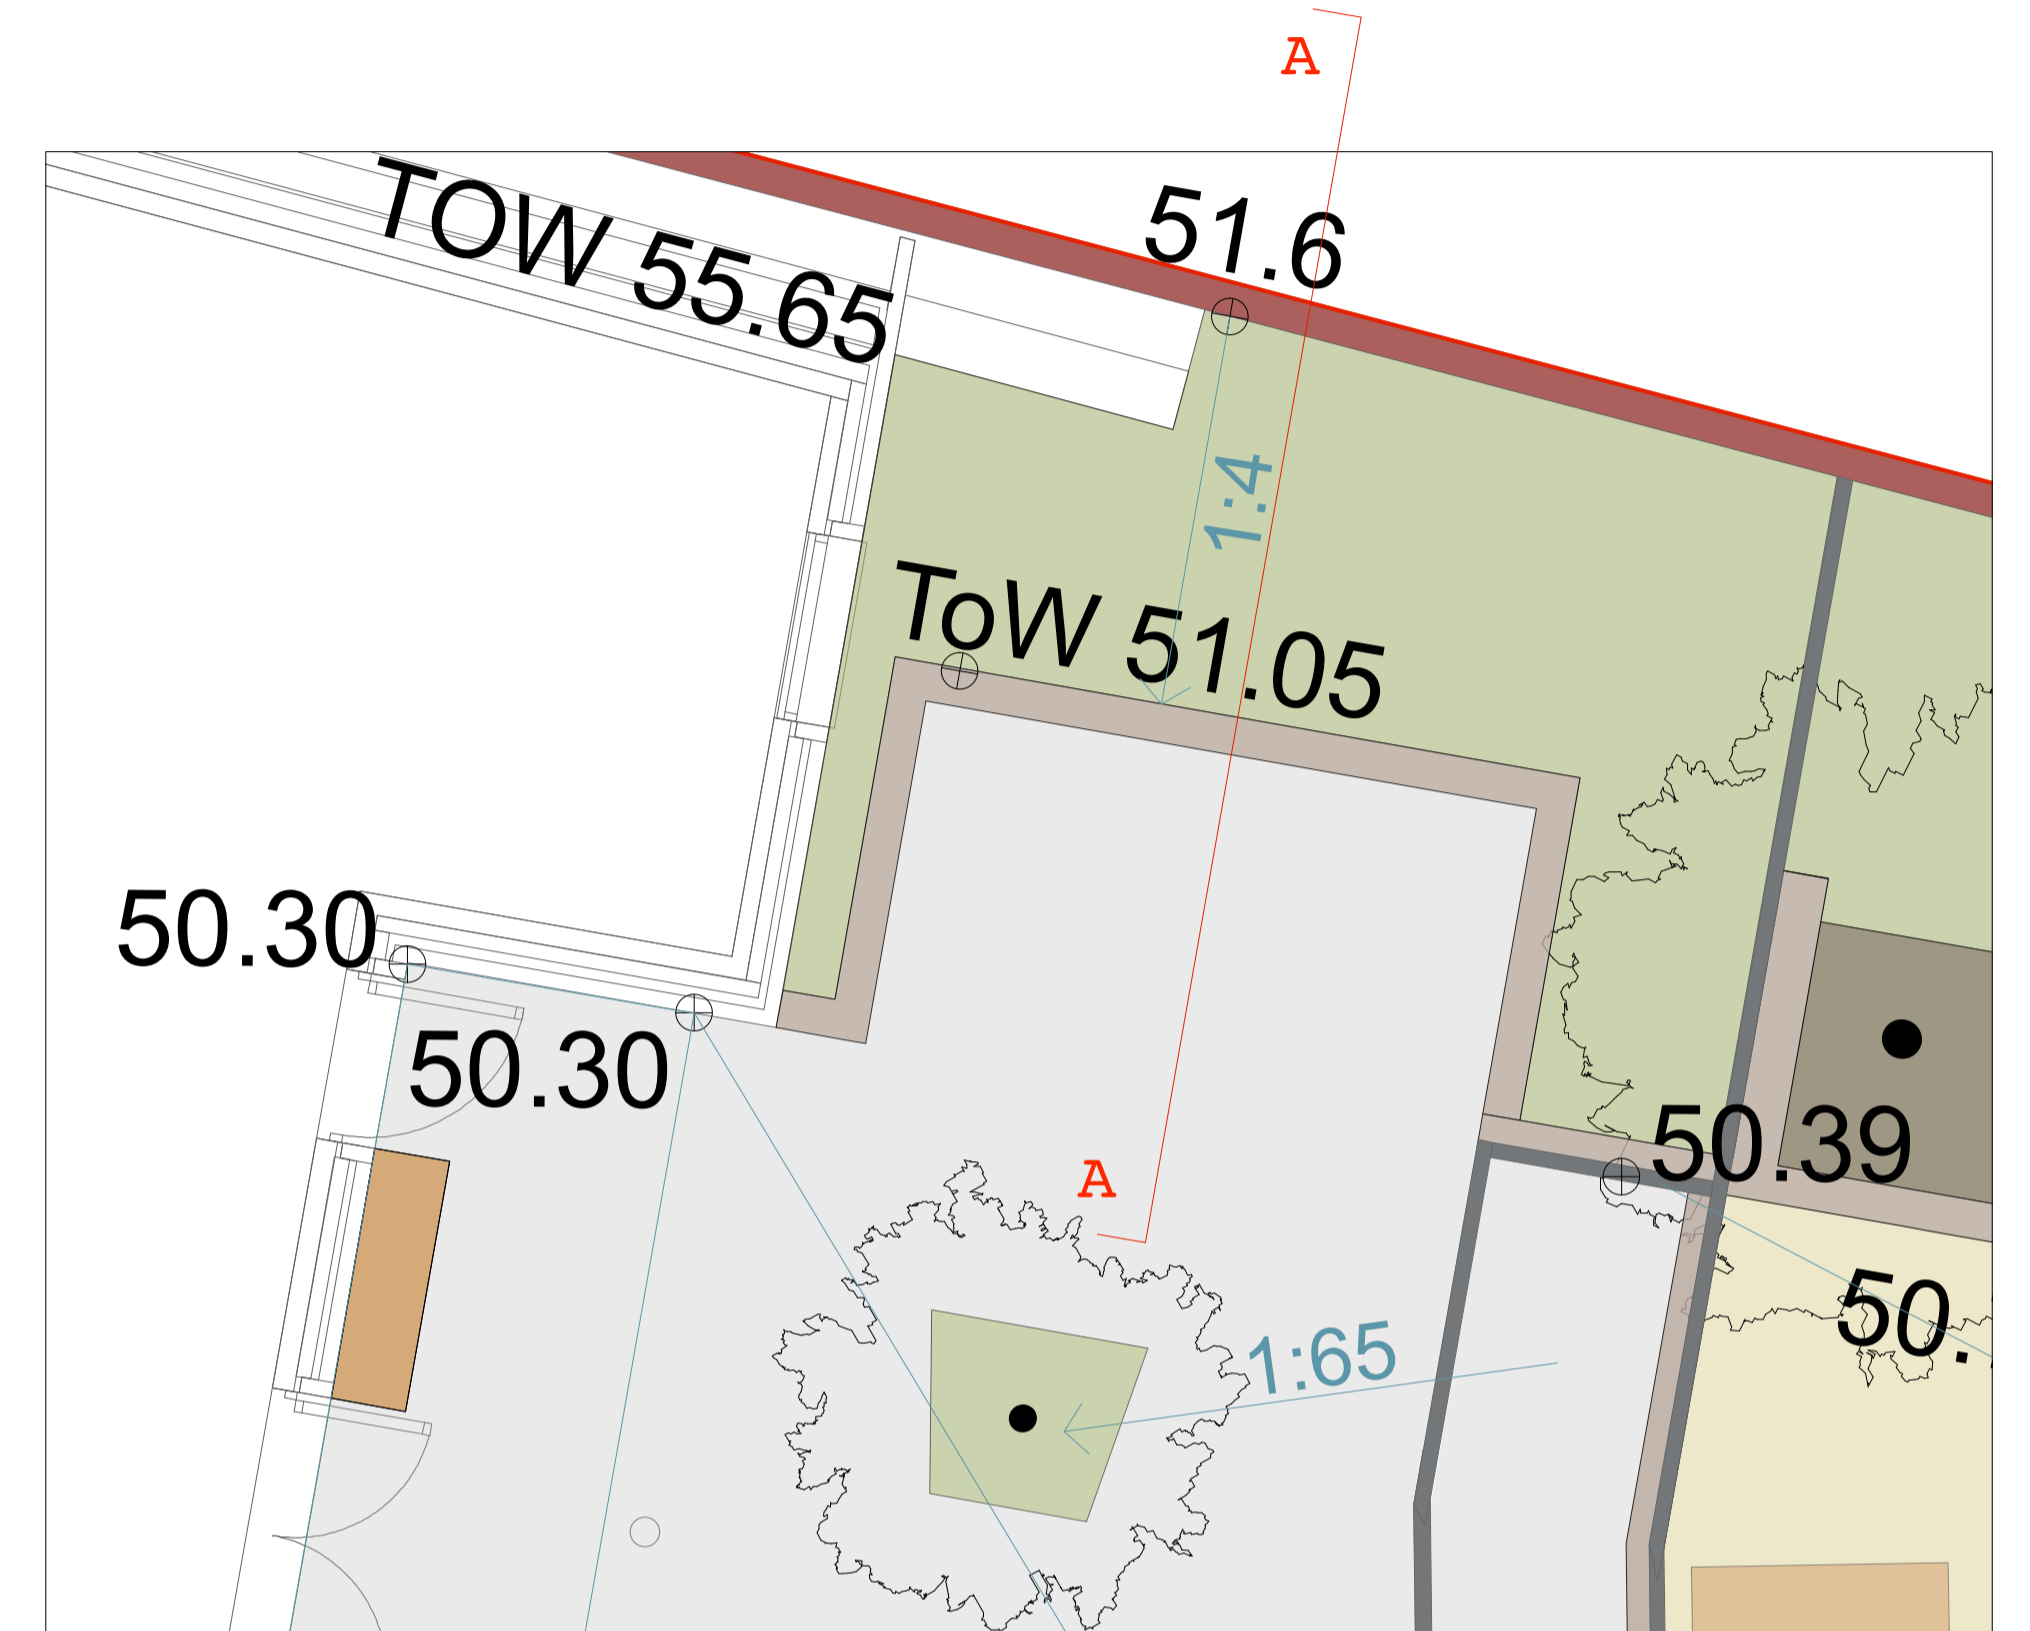

-For general arrangements refer to current revision of surfaces/edges plan K1037.F.08.HSL1.  
-For position and build-up of foundation refer to engineers' specification.

**JCLA**

3A Iliffe Yard  
LONDON SE17 3QA  
Telephone  
+44 (0)207 703 3270

www.jcla.co.uk

Notes  
- Do not scale from drawings.  
- To be read in conjunction with all relevant Architects', Services and Structural Engineers' drawings.  
- All existing site, tree and building information has been compiled from different sources.  
- All dimensions to be checked on site.

Revisions

**PLANNING  
CONDITION ISSUE**

Project Kingsgate Liddell  
Project No. KL037  
Client Camden council

Date 18.01.2017  
Scale 1:10/100/200 @ A1

Drawing Name. Timber sleeper wall  
(behind bike store horizontal)  
Dwg No. KL037.F.SD.305

Revision