

## 1.2 Camera Type External dome

### Panasonic SFV 311

This type of camera is specifically designed for external use and shall be located externally around the building. The model of the camera shall be a Panasonic SFV 311 camera. These cameras shall provide general surveillance on external elevations.

This camera is a vandal resistant dome type it has a 3.8 to 8.00mm lens for a wider dynamic range picture. It has the capability to switch from colour during daytime and monochrome during night time if the light levels drop and has built in video detection. This camera is a fixed camera and therefore has no pan tilt and zoom facilities.

### Key features

- Built-in MPEG-4 and JPEG digital signal output at 720 P image size with up to 30 ips.
- MPEG-4/JPEG dual stream output for simultaneous live monitoring and high resolution recording. (See the Frame Rate Chart for details.)
- 3.6x variable-focal lens (2.8 - 10mm).
- Power over Ethernet (PoE) IEEE 802.3af.
- Built-in SD Memory card slot for alarm recording and backup upon network failure.
- Built-in Video Motion Detector.



# Panasonic

## Super Dynamic HD Vandal Resistant & Waterproof Dome Network Camera

# WV-SFV311 WV-SFV310



## HD / 1,280 x 720 60 fps H.264 Vandal Resistant Network Camera featuring *Super Dynamic*

### Key Features

- 720p HD images up to 60 fps<sup>\*1</sup>
- Approximate 1/3 inches, high sensitivity MOS image sensor
- Super high resolution at HD/1,280 x 720 created by high sensitivity MOS Sensor.
- **Multiple H.264 (High profile) streams (max. 4 streams)** and JPEG streams ensure simultaneous real time monitoring and high resolution recording by new enhanced "UniPhier<sup>®</sup>", Panasonic's proprietary System LSI platform.
- **Enhanced Super Dynamic<sup>\*1</sup>** and ABS (Adaptive Black Stretch) technologies deliver **133 dB** wider dynamic range compared to conventional cameras.
- **Multi process NR & 3D-DNR** ensures noise reduction in various conditions.
- High sensitivity with Day & Night(IR: WV-SFV311, Electrical: WV-SFV310) function:  
WV-SFV311: 0.01 lx (Color), 0.003 lx (B/W) at F1.6  
WV-SFV310: 0.01 lx (Color), 0.008 lx (B/W) at F1.6
- New camera attachment bracket allows an **easy camera installation** toward all four directions.
- **ABF (Auto Back Focus)** ensures easy installation. (WV-SFV311 only)
- **VIQS (Variable Image Quality on Specified area)** technology allows the designated **eight areas** to retain higher image quality while the excluded area will have a decreased image quality, which enables to use lower image file size and bit rate.
- Cropping function enables to provide whole image and the part image simultaneously. Up to 4 image capture areas can be specified, and it is also possible to control the sequence.
- **Face Super Dynamic** technology ensures clear face image.
- Lens distortion compensation for the distorted images can be adjusted 256 steps.
- Electronic sensitivity enhancement: Auto (Up to 16/30s) / OFF
- Selectable light control modes:  
**Outdoor scene, Indoor scene (50 Hz) / Indoor scene (60 Hz), Fix shutter**  
Indoor scene (50 Hz/60Hz):  
Flicker caused by fluorescent lightning will be automatically compensated.
- 2x extra optical zoom at 640 x 360 resolution
- 2x, 4x digital zoom controlled by browser
- **VMD (Video Motion Detection)** with 4 programmable detection areas, 15 steps sensitivity level and 10 steps detection size
- Privacy Zone can mask up to 8 private areas, such as house windows and entrances/exits.
- Camera title display: Up to 20 alphanumeric characters on the browser
- Alarm sources including 3 terminal input, VMD and Panasonic alarm command can trigger actions such as SDXC/SDHC/SD memory recording, FTP image transfer, E-mail notification, Indication on browser, Alarm terminal output, and Panasonic alarm protocol output.
- Full duplex bi-directional audio allows interactive communication between camera site and monitoring site. (WV-SFV311 only)
- JPEG Image compression ratio can be changed by alarm so that higher quality image can be provided.
- Prioritized stream control: One of the video streams can be prioritized when multiple recorders or client PCs are accessing the camera so that the recorder or the client PC can maintain the frame rate.
- Newly developed dome cover provides clearer images above the horizontal. Thereby, it expands the tilting range of the lens.
- Face detection function detects the position of human face and the information is sent by XML or video stream. (Optional)
- Can be added new intelligent extension software (Optional) in addition to built-in VMD (Video Motion Detection), alarm function.
- **Fog compensation function** equipped as standard.
- **Super Chroma Compensation** function realizes a better color reproducibility even in low illumination.
- H.264 max. bit rate/client and Total bit rate control allows flexible network traffic management. Frame rate priority mode controls bit rate and compression ratio to provide the specified frame rate.
- Internet mode: H.264 images can be transmitted over HTTP protocol.
- Multi-language: English / Italian / French / German / Spanish / Portuguese / Russian / Chinese / Japanese
- IPv4/IPv6 protocol supported
- Supports SSL, DDNS (viewnetcam, RFC2136)
- Still images (JPEG) can be viewed on mobile phones via Internet.
- Onvif compliant model
- IP66 rated water and dust resistant. Compatible with IEC60529 measurement standard, Type 4X(UL50), NEMA 4X compliant.
- Dehumidification device for use with various weather conditions
- Vandal resistant mechanism for high reliability

<sup>\*1</sup> Super Dynamic function is automatically set off on 60fps mode.


# Specifications

<b>Camera</b>	Image Sensor	Approx. 1/3 type MOS image sensor
	Effective Pixels	Approx. 1.3 mega pixels
	Scanning Mode	Progressive scan
	Scanning Area	4.864 mm (H) x 3.891 mm (V) [3/16 inches(H) x 5/32 inches(V)]
	Minimum Illumination	WV-SFV311 Color: less than 0.01 lx, BW: 0.003 lx (F1.6, Maximum shutter: Max. 1/30s, Gain: On(High)) Color: less than 0.0007 lx, BW: 0.0002 lx (F1.6, Maximum shutter: Max. 16/30s, Gain: On(High)) <sup>1)</sup> WV-SFV310 Color: less than 0.01 lx, BW: 0.008 lx (F1.6, Maximum shutter: Max.: Off (1/30s), Gain: On(High)) Color: less than 0.0007 lx, BW: 0.0005 lx (F1.6, Maximum shutter: Max. 16/30s, Gain: On(High)) <sup>1)</sup>
	White Balance	AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K)
	Light Control Mode	Outdoor scene: Automatic integration of ALC and ELC Indoor scene [50 Hz]: Automatic integration of ALC and ELC with flickerless Indoor scene [60 Hz]: Automatic integration of ALC and ELC with flickerless
	Shutter Speed	1.3 mega pixel [16.9/60 fps mode] OFF(1/60), 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 Other than 1.3 mega pixel [16.9/60 fps mode] OFF(1/30), 3/100, 3/120, 2/100, 2/120, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000
	Super Dynamic <sup>2)</sup>	On(High) / On(Normal) / Off
	Face Super Dynamic	ON / OFF (Only at Super Dynamic: ON)
	Adaptive Black Stretch	ON / OFF (Only when Super Dynamic: Off)
	Fog compensation	ON / OFF (Only when Super Dynamic/ Adaptive black stretch: Off)
	AGC	ON (LOW, MID, HIGH) / OFF
	Electronic Sensitivity UP	max. 1/1000 s, max. 1/500 s, max. 1/250 s, max. 1/100 s, max. 1/60 s, max. 1/30 s, max. 2/30 s, max. 4/30 s, max. 6/30 s, max. 10/30 s, max. 16/30 s
	Day & Night	WV-SFV311: IR Mode: Off / On / Auto1 (Normal) / Auto2 (IR Light) / Auto3 (SCC) WV-SFV310: Electrical Mode: OFF / AUTO
	Dynamic Range	133 dB typ. (Super Dynamic: ON, Light Control Mode: indoor)
	Digital Noise Reduction	High / Low
	Video Motion Detection	4 areas, Sensitivity: 15 steps, Detection size: 10 steps
	Privacy Zone	Up to 8 zones
	VIOS	Up to 8 zones
	Camera Title (OSD)	Up to 20 characters (alphanumeric characters, marks)
	Electric Zoom	TELE / WIDE, Auto Coarse adjustment of Focus
	Focus Adjustment	WV-SFV311: AFB / MANUAL (html only) WV-SFV310: Focus Assist
	Lens Distortion Compensation	256 steps
	Vari Focal Length	2.8 - 10mm (1/8 inches - 3/32 inches)
	Angular Field of View	[18 : 9 mode] Horizontal : 27.7° (TELE) - 99.0° (WIDE) Vertical : 15.6° (TELE) - 54.1° (WIDE) [4 : 3 mode] Horizontal : 27.7° (TELE) - 99.0° (WIDE) Vertical : 20.8° (TELE) - 72.9° (WIDE)
	Maximum Aperture Ratio	1 : 1.6 (WIDE) - 1 : 4.0 (TELE)
	Focusing Range	0.3 m - ∞
	Adjusting Angle	Horizontal: ±180°, Vertical: ±65°, Image tilt adjustment range: -225° (Left) to +120° (Right)
<b>Browser GUI</b>	Cropping	H.264(1) / H.264(2) / H.264(3) / H.264(4) / H.264(html) / JPEG(1) / JPEG(2) / JPEG(3) Up to 4 image capture areas can be specified
	Camera Control	Brightness, AUX ON / OFF
	Display Mode	Spot, Quad: Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only), 20 characters camera title available.
	Digital Zoom	1x, 2x, 4x controlled by browser GUI
	Camera Title	Up to 20 alphanumeric characters
	Clock Display	Time: 12H/24H, Date: 5 formats on the browser, Summer time (Manual)
	Alarm Control	Reset
	One Shot Capture	A still picture will be displayed on a newly opened window.
	Audio	Mic (Line) Input: ON / OFF Volume adjustment: Low / Middle / High, Audio Output (WV-SFV311 only): ON / OFF Volume adjustment: Low / Middle / High
	SD Memory Data Download	Still or motion Images recorded in the SDXC/SDHC/SD memory card can be downloaded.
	GUI / Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese
	System Log	Up to 100 (html)
	Supported OS <sup>3)</sup>	Microsoft® Windows® 8.1, Microsoft® Windows® 8, Microsoft® Windows® 7, Microsoft® Windows Vista
	Supported Browser	Windows® Internet Explorer® 11.0 (32 bit), Windows® Internet Explorer® 10.0 (32 bit), Windows® Internet Explorer® 9.0 (32 bit), Windows® Internet Explorer® 8.0 (32 bit), Windows® Internet Explorer® 7.0 (32 bit)
<b>Network</b>	Network IF	10Base-T / 100Base-TX, RJ-45 connector
	Image Resolution	Image Capture Mode: 1.3 mega pixel [16.9] (30/60fps) 1,280 x 720 / 640 x 360 / 320 x 160 / 160 x 90 Image Capture Mode: 1.3 mega pixel [4:3] (30fps) 1,280 x 960 / 800 x 600 / 640 x 480 / 400 x 300 / 320 x 240 / 160 x 120
	H.264 <sup>4)</sup> Transmission Mode	Constant bitrate / Frame rate priority / Best effort / Advanced VBR
	Frame Rate	1 / 3 / 5 / 7.5 / 10 / 12 / 15 / 20 / 30 / 60 fps
	Bit Rate/Client	64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 / 6,144 / 8,192 / 10,240 / 12,288 / 14,336 / 16,384 / 20,480 / 24,576 kbps
	Image Quality	LOW / NORMAL / FINE
	Refresh interval	0.2 / 0.25 / 0.33 / 0.5 / 1 / 2 / 3 / 4 / 5s
	Transmission Type	UNICAST / MULTICAST
	JPEG Image Quality	10 steps
	Refresh interval	0.1 fps - 30 fps (JPEG frame rate will be restricted when displaying both JPEG and H.264 images)
	Transmission Type	PULL / PUSH
	Audio Compression	G.726 (ADPCM) 32 kbps / 16 kbps, G.711 64 kbps / AAC-LC
	Audio Mode	OFF / Mic (Line) input / Audio output / Interactive (Half duplex) / Interactive (Full duplex)
	Authentication for Audio	Level 1 only / Level 2 higher / All users
	Total Bit Rate	64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 / 6,144 / 8,192 kbps / Unlimited
	Supported Protocol	IPv6: TCP/IP, UDP/IP, HTTP, HTTPS, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, RTP, MLD, ICMP, ARP IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP, IGMP, ICMP, ARP
	FTP Client	Alarm image transmission, FTP periodic transmission (When the FTP transmission is failed, backup on an optional SDXC/SDHC/SD memory card is available.)
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)


<b>Network</b>	SDXC/SDHC/SD Memory Card (Option)	H.264 recording: Manual REC / Alarm REC (Pre/Post) / Schedule REC / Backup upon network failure Compatible (JPEG only)
	* Manufactured by Panasonic (SD speed class 4 or higher)	JPEG recording: Manual REC / Alarm REC (Pre/Post) / Backup upon network failure Compatible SD (SDHC/SDXC) card: Panasonic 2 GB, 4 GB*, 8 GB*, 16 GB*, 32 GB*, 64 GB** model
	* Use the SD memory card that complies with UHS-1 (Ultra High Speed-I) in the case of SD Speed Class 10.	**SDHC card, **SDXC card (except miniSD card and microSD card)
	Cellular Phone Compatibility	JPEG image, AUX control (by access level)
	Mobile Terminal Compatibility	iPad, iPhone, iPod touch (iOS 4.2.1 or later), Android™ Terminal
<b>Alarm</b>	Alarm Source	3 terminals input, VMD, Command alarm, Audio detection alarm
	Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification Indication on browser, FTP image transfer, Panasonic protocol output
	Alarm Log	With SDXC/SDHC/SD memory card: Up to 50,000 logs for each SD memory card
	Schedule	Alarm / VMD / Access permission / H.264 recording / Scene file
<b>Input/Output</b>	Monitor Output (for adjustment)	VBS: 1.0 V [p-p]/75Ω, NTSC / PAL composite, ø3.5mm mini jack MONITOR OUT conversion plug included
	Microphone/Line Input (WV-SFV311 only)	MIC IN and Line IN are selectable. ø3.5 mm monaural mini jack (monaural input) (Applicable microphones: Plug-in power type) Supply voltage: 2.5 V ±0.5 V Input impedance: Approx. 2 kΩ (unbalanced)
	Audio Output (WV-SFV311 only)	ø3.5 mm stereo mini jack (monaural output) Output impedance: Approx. 600 Ω (unbalanced)
	External I/O Terminals	WV-SFV311 ALARM IN 1/DAY/NIGHT IN, ALARM IN 2/ALARM OUT, ALARM IN 3/AUX OUT WV-SFV310 ALARM IN 1, ALARM IN 2/ALARM OUT, ALARM IN 3/AUX OUT
<b>General</b>	Safety	UL (UL60950-1), C-UL (CAN/CSA C22.2 No. 60950-1), CE, IEC60950-1
	Emissions	FCC (Part15 ClassA), ICES003 ClassA, EN55022 ClassB, EN55024
	Power Source and Power Consumption	WV-SFV311 DC power supply: 12 V DC/710 mA/Approx. 8.5 W PoE Device: 48 V DC/250 mA/Approx. 12 W (Class 0 device) WV-SFV310 DC power supply: 12 V DC/660 mA/Approx. 7.9 W PoE Device: 48 V DC/240 mA/Approx. 11.5 W (Class 0 device) * ONLY CONNECT 12 V DC CLASS 2 POWER SUPPLY.
	Ambient Operating Temperature	-40 °C ~ +50 °C (-40 °F ~ 122 °F)
	Ambient Operating Humidity	20 - 90 % (no condensation)
	Impact Protection	IEC 60068-2-75 test EN, 50 J / IEC 62262 IK10
	Water and Dust Resistance	IP66, IEC60529 measuring standard compatible, Type-4X(UL50), NEMA 4X compliant
	Shock Resistance	Compliant with 50 J IEC60068-2-75
	Dimensions	ø164 mm x 139 mm (H) [ø6-15/32 inches x 5-15/32 inches (H)] Dome radius 42 mm (1-21/32 inches)
	Mass (approx.)	1.6 kg (3.53 lbs.)
	Finish	Main body: Aluminum die cast, light gray / Dome section: Clear polycarbonate resin

- \*1 Converted value
- \*2 Super Dynamic function is automatically set off on 60fps mode.
- \*3 Refer to "Notes on Windows Vista® / Windows® 7 / Windows® 8" on the provided CD-ROM for further information about system requirements for a PC and precautions when using Microsoft® Windows® 8 or Microsoft® Windows® 7 or Microsoft® Windows Vista®.
- \*4 Transmission for 4 streams can be individually set.

## Part Names and Functions

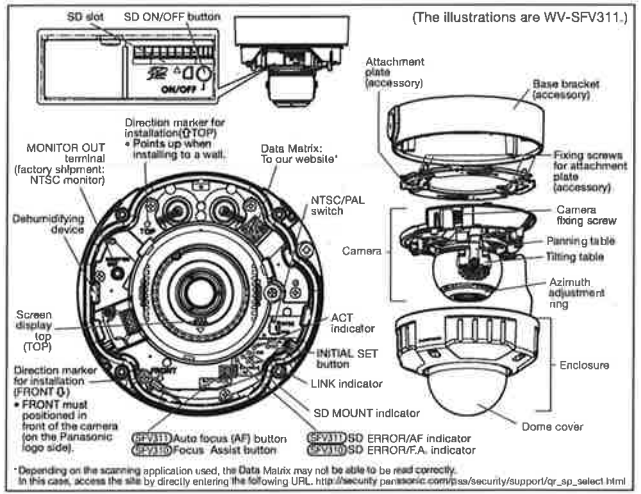

## Appearance

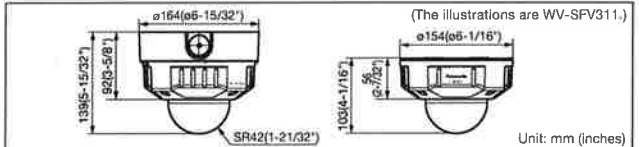

**Trademarks and registered trademarks**

- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
- UniPhier is a registered trademark of Panasonic Corporation.
- "I-PRO SmartHD" logo is trademark or registered trademark of Panasonic Corporation.
- ONVIF and the ONVIF logo are trademarks of ONVIF Inc.

**Important**

- Safety Precaution: Carefully read the Important Information, Installation Guide and operating instructions before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.
- Masses and dimensions are approximate. • Specifications are subject to change without notice.

DISTRIBUTED BY :



<http://security.panasonic.com>

<http://www.facebook.com/PanasonicNetworkCamera>

(2A-118AA)