

BasicCharge:

EV Pedestal *The Low Cost EV Charging Solution*

SuperFast
EV Charging Units



Charging Solution: IEC 62196 (Type 2) 3 phase Mode 3 charging socket(s) c/w hatchlock



11kW
+
22kW

The BasicCharge: EV Pedestal SuperFast is the brother to Rolec's world-leading classic utility pedestal, which now boasts over 100,000 sold worldwide. This mass produced, tried and tested pedestal is, we believe, the most affordable and adaptable EV charging pedestal in the world.

This versatile BasicCharge: EV Pedestal SuperFast can be either surface or root mounted and includes IEC 62196 Type 2, Mode 3 charging socket(s), c/w hatchlock facility, built-in overload & fault current protection and an LED status indicator.

The BasicCharge: EV Pedestal SuperFast is available either as a 1way or 2way charging version: in SuperFast format. Each pedestal features built-in photocell controlled LED amenity lighting and is manufactured to fully comply with IEC 61581-1 specifications.

SuperFast
EV Charging Units



BasicCharge: EV Pedestal SuperFast Features

- 16amp, 3 phase (11kW) and 32amp, 3 phase (22kW) charging options
- Ideal for a variety of different locations, including private car parks, offices, factories, hotels, cinemas, leisure centres, shops, warehouses, hospitals, schools, depots – in fact any moderately secure environment
- Compliant with all EVs and PHEVs
- Can be customised to suit corporate branding
- IP54 British Standard Institute (BSI) certificated
- Easy to install and maintain
- CE certified

ROLEC
EV

Europe's largest range of EV charging solutions – *Join the EVolution*

Click here to visit our website
www.rolecserv.com to view:

- Europe's largest range of charging points, leads and accessories
- A huge product gallery
- Company and industry news, helpful hints, advice and general information

BasicCharge:

EV Pedestal *The Low Cost EV Charging Solution*

SuperFast
EV Charging Units



Charging Solution: IEC 62196 (Type 2) 3 phase Mode 3 charging socket(s) c/w hatchlock

SPECIFICATIONS

Mechanical

- Built around a heavy duty, hot dipped galvanised steel chassis
- High impact resistant black Foamex outer shell
- Pedestal height: 1000mm (plus amenity lighting lens of 130mm)
- Pre-drilled fixing and cable entry points
- IP54 Category 1 weather proof rating to BS EN 60529 Certification
- Manufactured in compliance with BS7671 Wiring Regulations
- Compliant with IET EV regulations
- Corrosion resistant / UV stabilised
- Operating temperature: - 30C to +50C

Electrical

- 1way and 2way charging
- Available in 16amp (11kW) and 32amp (22kW) 3 phase charging options
- Each charging socket is Mode 3 IEC 61851-1 communication compliant
- Each socket comes complete with security hatchlock
- Each socket comes complete with LED status indicator
- Each socket is overload, DC sensitive and fault current protected
- Photocell controlled LED amenity lighting head
- Each pedestal comes complete with cable gland plate and 5 x 35mm cable terminals as standard (other options available)
- Full internal wiring – ready to install

Options

- Available with powder coated aluminium outer shell
- Available with powder coated stainless steel outer shell
- IP65 rated 13amp domestic socket (Mode 2 charging or maintenance)
- Built-in class 1 MID approved kWh meter(s)
- Corporate branding / bespoke colours
- Galvanised steel ground mounting base
- Protection barriers
- Amp-Selector Keyswitch (16amp Max or 32amp Max charging options)
- Amp-Selector Rotary Switch (6amp solar/13amp domestic/16amp or 32amp FastCharge options)

Payment & Access Options

- Electrical keyswitch control




Product codes:

EVCL2007 – 1 x 16amp, 3 phase (11kW) charging socket
EVCL2008 – 1 x 32amp, 3 phase (22kW) charging socket
EVCL2017 – 2 x 16amp, 3 phase (11kW) charging sockets
EVCL2018 – 2 x 32amp, 3 phase (22kW) charging sockets
EVCL2025 – 1 x 32amp, 1 phase (7.2kW) and
1 x 32amp 3 phase (22kW) charging sockets

EVBCD002 Photos / images are not contractual © copyright 2015

Six divisions of Rolec Services Ltd

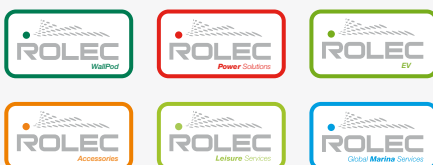


www.rolecserv.com

Head office contact:

t: ++44 (0) 1205 724754
f: ++44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK, PE20 1QU

Position of car charging point in public realm area

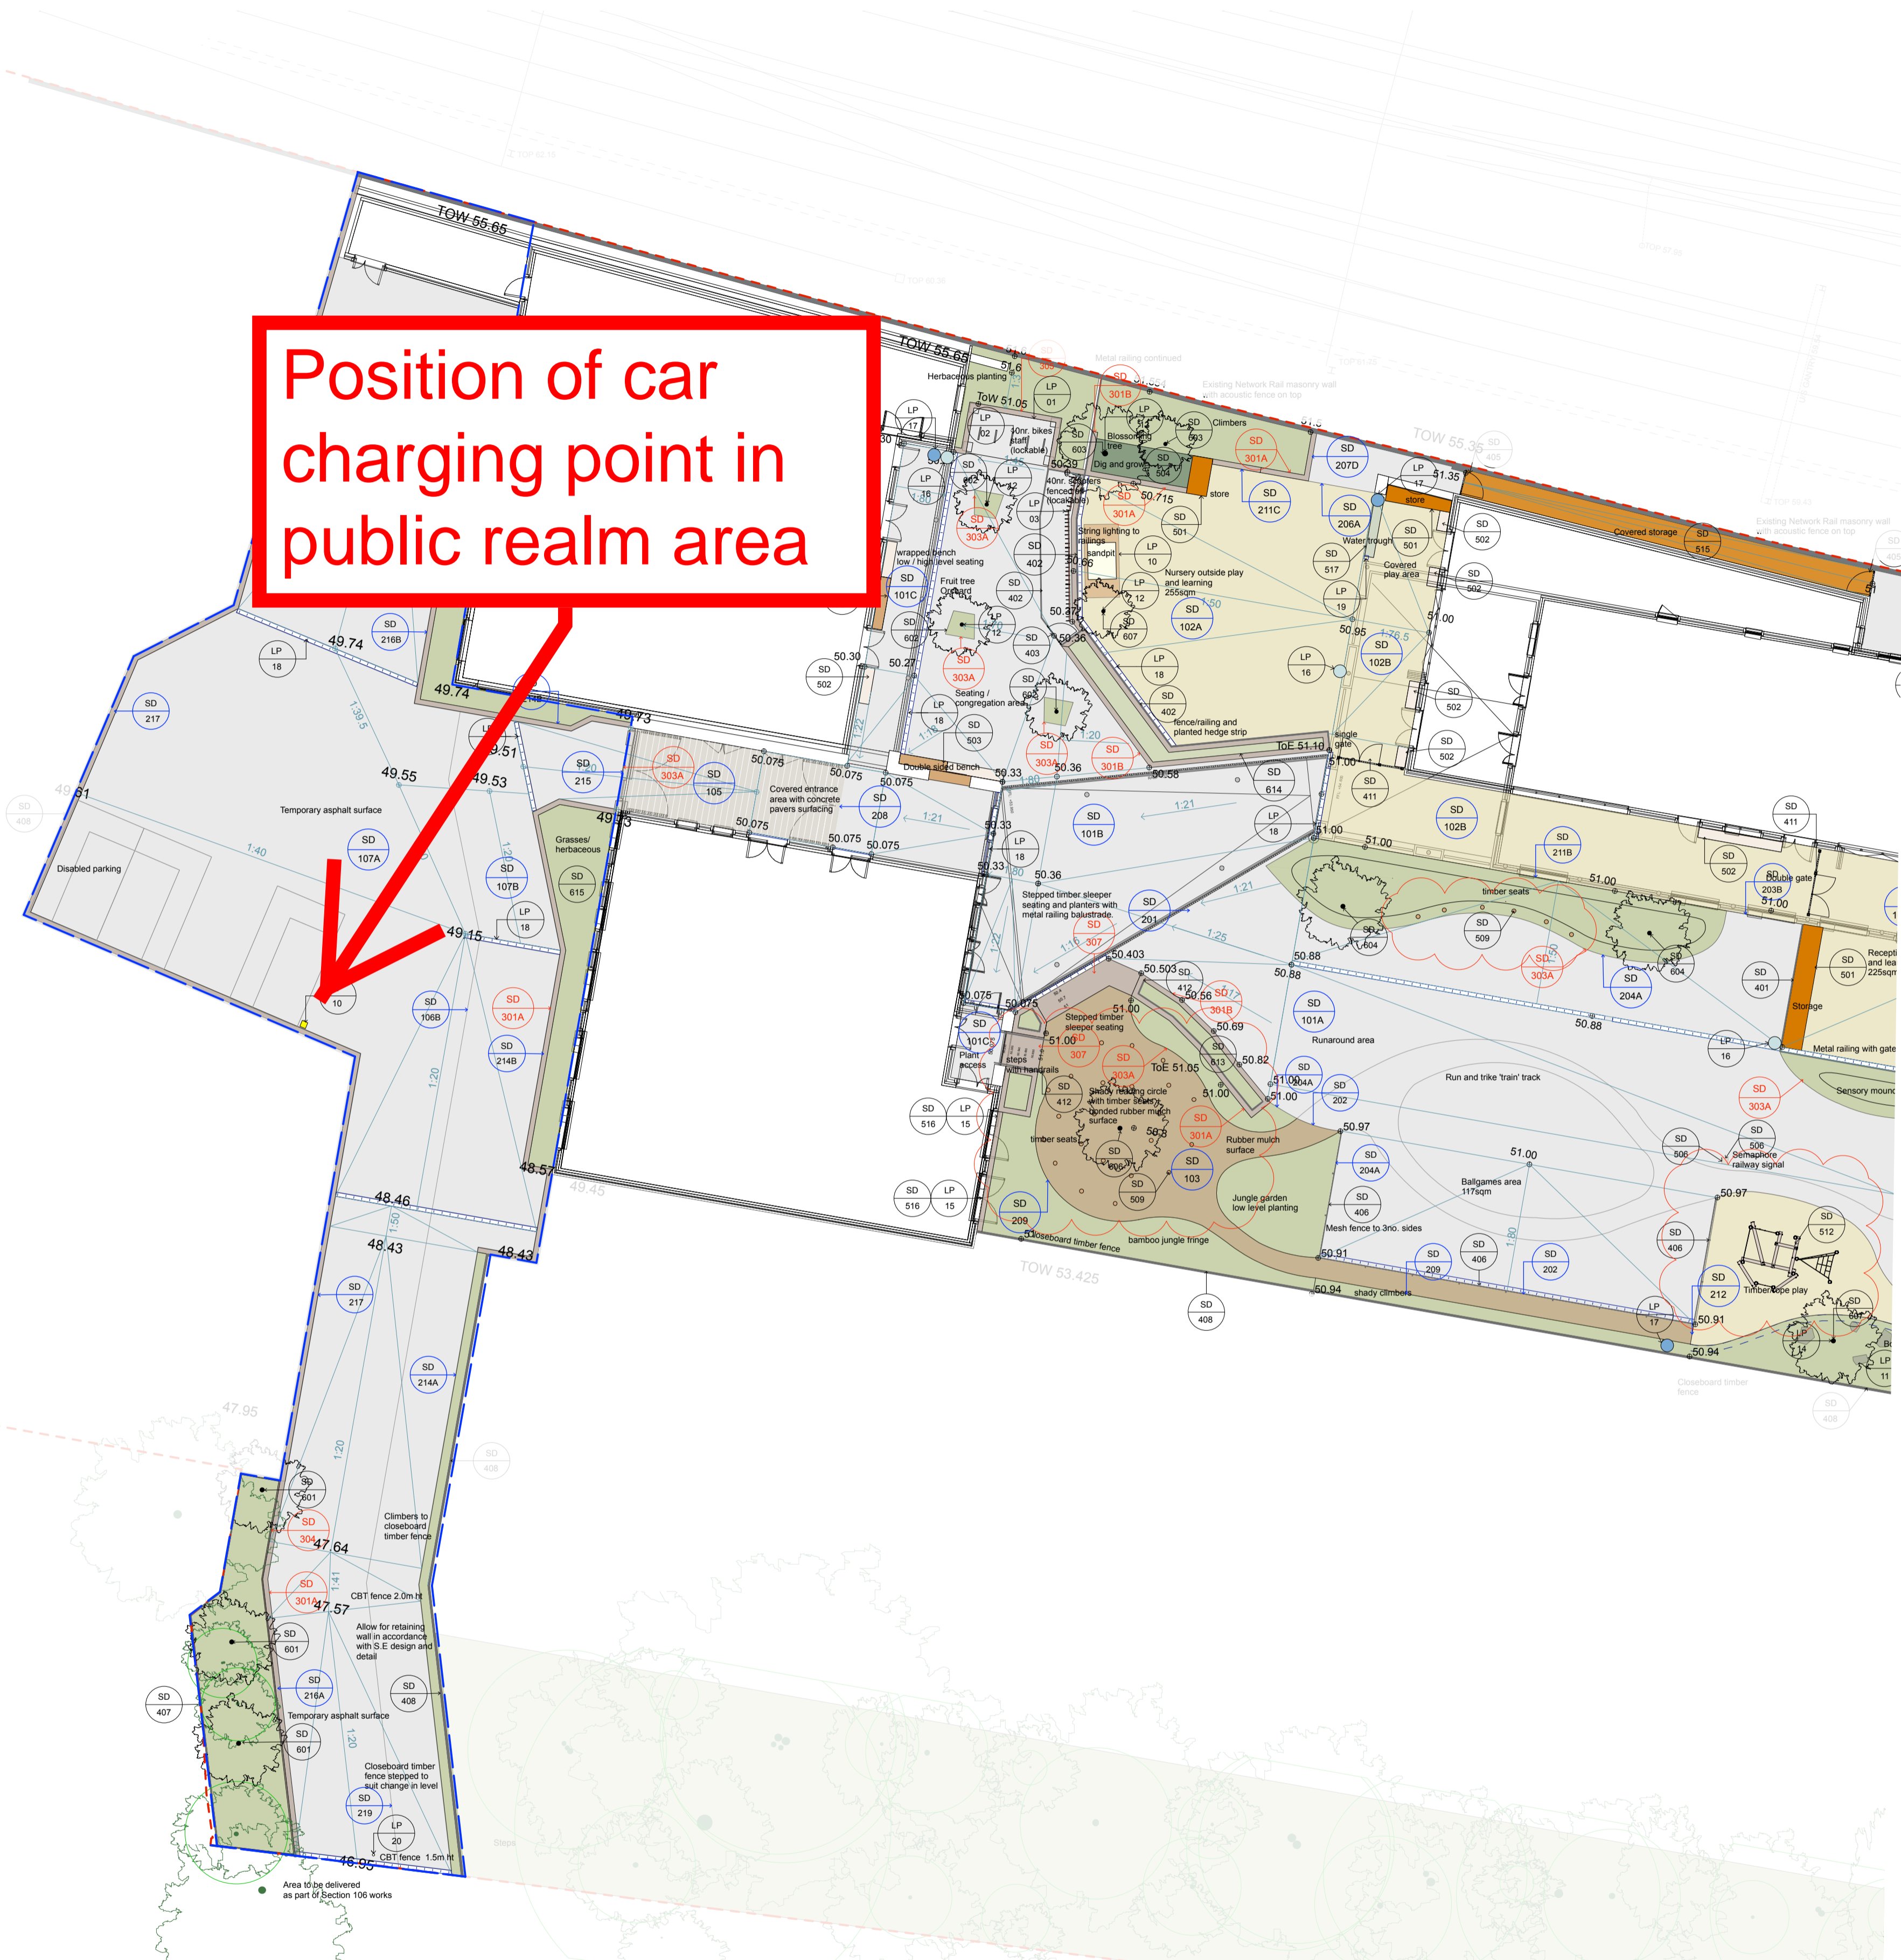

- KEY**
- - - Site boundary line
 - - - Area outside school boundary however please note this is included in phase 1 works
 - Storage
 - Low seating
 - High seating
 - - - Fall height protection area
 - Existing tree RPA (root protection area) All surfacing within this area to be laid on cellweb construction as detailed
 - Existing tree
 - Proposed tree
 - Walls/railings/fences
 - Timber sleeper edges/walls/steps
 - Asphalt
 - Proposed planting
 - Wetpour softplay surface
 - Existing level
 - Proposed level
 - Detail Reference Number (landscape/playground equipment and enclosures)
 - Detail Reference Number (edging)
 - Detail Reference Number (surfacing and surfaces thresholds)

Note: All external works should comply with Arboricultural Method Statement

N
JCLA
 3A Iliffe Yard
 LONDON SE17 3QA
 Telephone
 +44 (0)207 703 3270
 www.jcla.co.uk

Notes

- Do not scale from drawings.
- To be read in conjunction with all relevant Architects', Services and Structural Engineers' drawings.
- All existing site, tree and building information has been compiled from different sources.
- All dimensions to be checked on site.

Revisions

- Revision A: - Amended layout of entrance planters
- Revision B: - Detail references updated

CONSTRUCTION ISSUE

Bubbles key
 Changes

Project Kingsgate Liddell
Project No. KL037
Client London Borough of Camden
Date 6th April 2017
Scale 1:200 @ A1
Drawing Name. Detail Landscape plan 4
Dwg No. KL037.G.01.DLP4

Revision
B