

Eclipse **SINGLE FIRE**



Sliding door system for FD30 rated doors

Sliding pocket door system for use with FD30 fire doors.

A larger passage width for standard UK approved 30 minute fire doors.


Fully tested and approved by Cambridge Fire Research, UKAS approved testing authority.



**INTERNATIONAL FIRE
CONSULTANTS LTD**

The system was tested to BS EN 1634-1:2008 for fire resistance at Cambridge Fire Research which is an independent UKAS accredited testing laboratory.

Available Accessories




Self Closing Mechanism

The door closes automaticall by itself, see page 39

FRAMES FOR SINGLE DOORS

finished wall thickness **100** mm

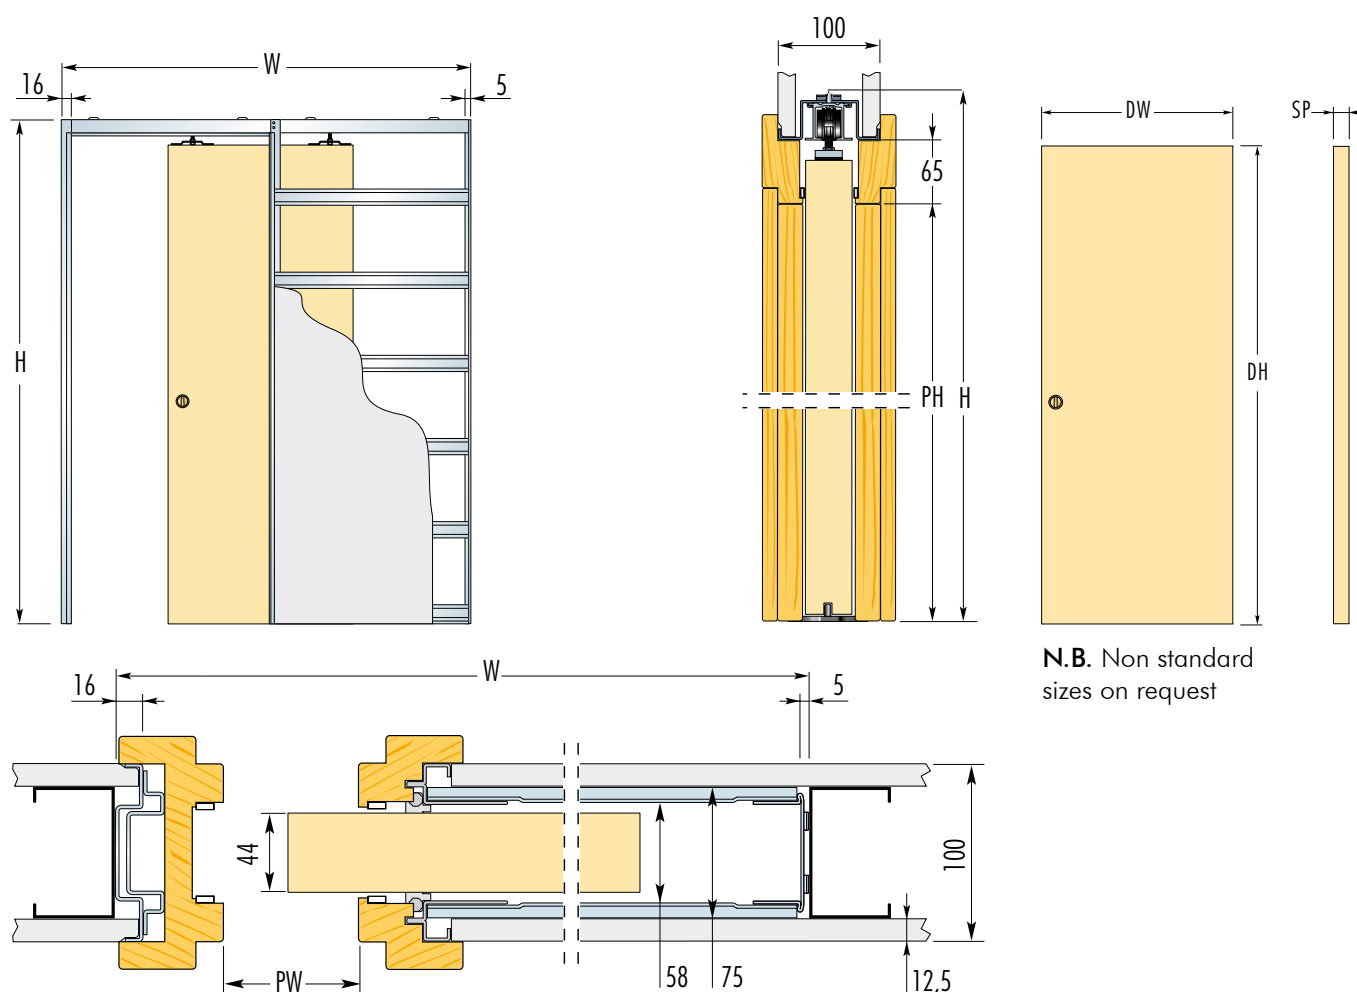

N.B. Non standard sizes on request

FRAMES FOR SINGLE DOORS			DOOR PANEL UK			NOTES
Max. Passage Size PW x PH	Overall Dimension W x H	Finished Wall	DW	Standard DH	SP	
570 x 2010	1288 x 2115	100	626	2040	44	Special jamb's incorporating architraves 100mm finished wall thickness. Use 15 x 4 mm intumescent strips and 12, 5 mm fireboard (not supplied).
670 x 2010	1488 x 2115	100	726	2040	44	
770 x 2010	1688 x 2115	100	826	2040	44	
870 x 2010	1888 x 2115	100	926	2040	44	
970 x 2010	2088 x 2115	100	1026	2040	44	
555 x 1951	1273 x 2056	100	2ft. 0in. x 6ft. 6in. (610 x 1981mm)	44		
631 x 1951	1449 x 2056	100	2ft. 3in. x 6ft. 6in. (686 x 1981mm)	44		
707 x 1951	1625 x 2056	100	2ft. 6in. x 6ft. 6in. (762 x 1981mm)	44		
783 x 1951	1701 x 2056	100	2ft. 9in. x 6ft. 6in. (838 x 1981mm)	44		
870 x 1951	1888 x 2056	100	3ft. 0in. x 6ft. 6in. (914 x 1981mm)	44		

dimensions are given in mm.