

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.


Material Key

1. Woodstock Buff facing brickwork
2. Camborne Buff facing brickwork
3. Woodstock Buff facing brickwork feature dentil panel
4. Glazed tiled panel, color RAL 6018.
5. Stone/pcc feature band
6. Aluminium composite framed windows, colour RAL 7032
7. Aluminium framed curtain walling, colour RAL 7016
8. Aluminium framed doors
9. Etched glazing
10. Ventilation louvre, colour RAL 7016
11. Anodised aluminium cladding copper
12. Anodised aluminium spandrel panel
13. Anodised aluminium entrance canopy RAL 6018
14. Metal balcony railings RAL 7032
15. Roof balustrade RAL 7016
16. Laminated obscure glass panels
17. Coloured laminate board RAL 6017
18. Metal coping RAL 7016
19. Blockwork laid over hand to gable of existing adjacent building.



Plender Street A South Elevation Proposed

| Rev | Description | Date | Initial | Checked |
|-----|--|------------|---------|---------|
| H | Window RAL colours amended following a meeting with the planning officer. | 08.11.2014 | KDR | |
| G | Parapet changed back to original coping and material key updated. | 26.09.2014 | DH | |
| F | Louvers added above substation doors. Overall substation door height increased. | 17.09.2014 | DH | |
| E | Brick coping added, brick tones amended and material key expanded. Status updated to construction. | 15.08.2014 | DH | |
| D | Sub station doors amended to UK Power Solutions details. | 05.08.2014 | DH | |
| C | Floor and external floor levels amended, facing materials notes expanded. | 24.03.2014 | KDR | |
| B | Sub station doors and louvers added, grid lines adjusted to suit new column layout. | 05.03.2014 | KDR | |
| A | Feature brick panel added, sub station louvers and doors added, grid lines adjusted. | 13.02.2014 | KDR | |

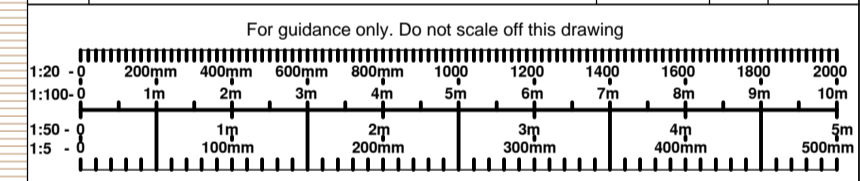

Highfield House, 5 Ridgeway
 Quinton Business Park, Birmingham B32 1AF
 T: +44(0)121 213 5500 E: rpsbm@rpsgroup.com F: +44(0)121 213 5502



Project **Plender Street
 Camden**

Title **Building A
 South Elevation
 General Arrangement**

| Status | Drawn By | PM/Checked by |
|--------------|------------|---------------|
| Construction | KDR | - |
| Job Ref | Scale @ A1 | Date Created |
| AAA5174 | 1:75 | 23.01.2014 |

| Drawing Number | Rev |
|----------------|-----|
| A-A602 | H |