


EXISTING BALUSTRADE CLADDED WITH STONE PANELS ON EACH SIDE, WHICH ARE FIXED TO THE BALUSTRADE STRUCTURE WITH 4 No. FIXINGS, WHICH APPEAR TO BE THROUGH BOLTS THAT SECURE BOTH PANELS TO THE STRUCTURE IN THE CENTRE.

REAR PANEL CAREFULLY TO BE REMOVED. (SHOWN INDICATIVELY) SEE BOX NOTE FOR DETAILS.

EXISTING RC STAIR

**ELEVATION OF BALUSTRADE** (1:50)  
(LOOKING NORTH)

1 No. STONE PANEL ALONG THE STAIR IS TO BE REMOVED TO EXPOSE THE BALUSTRADE STRUCTURE BEHIND. THE CONTRACTOR IS TO COMMENT ON A SUITABLE PANEL THAT WOULD BE REASONABLY PRACTICAL TO REMOVE. LOCATION TO BE AGREED WITH ABA.

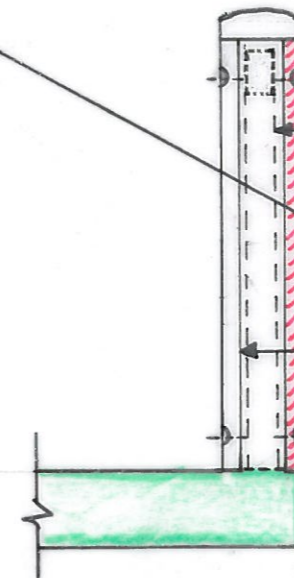

STRUCTURE OF BALUSTRADE SHOWN INDICATIVELY.

FRONT PANEL TO BE SECURED DURING REMOVAL, AS IT IS UNKNOWN IF THE PANELS ARE CONNECTED TO EACH OTHER.

**DETAIL A-A**  
(1:20)

notes

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS & ENGINEERS DRAWINGS & THE SPECIFICATION.
2. THE CONTRACTOR SHALL ENSURE THAT THE STABILITY OF THE BUILDINGS AND ADJOINING PREMISES IS MAINTAINED AT ALL STAGES OF OPENING UP WORKS, AND PROGRAMME THE WORKS ACCORDINGLY.
3. THE CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH ALL REQUIREMENTS OF THE HEALTH & SAFETY AT WORKS ACT 1974, INCLUDING HEALTH & SAFETY EXECUTIVE APPROVED CODES OF PRACTICE AND GUIDANCE NOTES.
4. THE CONTRACTOR IS RESPONSIBLE FOR THE DESIGN, MAINTENANCE AND ERECTION OF ALL TEMPORARY WORKS REQUIRED TO UNDERTAKE THE INVESTIGATIONS.
5. UPON COMPLETION OF THE WORKS THE CONTRACTOR IS TO CLEAR UP ANY DEBRIS. HE SHOULD KEEP THE AREAS NEAT AND TIDY AT ALL TIMES.
6. THE CONTRACTOR IS TO MAKE GOOD THE BALUSTRADE ONCE THE STRUCTURAL ENGINEER HAS VIEWED THE STRUCTURE.

23.01.15 ISSUED FOR INFORMATION Rnk

job  
**BRITISH MUSEUM  
NEW HANDRAIL TO WEST  
STAIR**

title  
**PROPOSED OPENING UP  
WORKS**

drawn  
RG  
date  
JAN'15

checked  
Rnk  
scale (original - A3)  
AS SHOWN

**Alan Baxter**

75 Cowcross Street London EC1M 6EL  
tel 020 7250 1555  
email aba@alanbaxter.co.uk

www.alanbaxter.co.uk

drg. no. **0699/442/301** rev. —