

SAFETY/HEALTH AND ENVIRONMENTAL INFORMATION/11/2013/2014	Controlled Risks	NO SIGNIFICANT RISK
	Maintained/controlling Risks	NO SIGNIFICANT RISK
	Directed Investigation Risks	NO SIGNIFICANT RISK

1. All luminaires to be complete with DALI driver/ballast, drawings to be read in conjunction with the project luminaire schedule and employers requirements documents etc.

- [illegible]

11. Lighting control in the lobby will be wired from the lighting control system in the lobby. The lighting system will be wired from the lighting control system in the lobby.

12. Lighting control in the entrance lobby will be timed from the lighting control system during the lighting system's set to the available daylight.

14. When the core build, if possible, will be made within the lighting control system to control lighting within tenant areas based on a 40-2 of floor space **pl** is space capacity as outlined within the employer's requirement document.

15. Emergency lighting shall be automatic as part of the lighting control system.

17. Emergency laminae positioned to suit test signage by architect.

10. Emergency Inverters removed from A/C Type I units are not compliant with BS-6268. First emergency solution is roof terrace to be agreed.

Legend

PO PIR Presence detector

PC PIR Presence detector with photocell

Microwave detector

One way Switch ("X" gang is indicated)

Two way Switch ("X" gang is indicated)

CALL Emergency Call
LCM Lighting Control Module

[illegible][illegible]

Size	Original size	Shrink
50	A0	


4E Design
4 - For Stage Approval

NGS CROSS S2

Level 12 Lighting and
Jobbing Control 12 about

XC-S2-001-9161-E-6C-2109

S (Engineering Services) Ltd
1 Floor
• Exton Square
• Exton
• 1270
• 0207 801600
www.esl.co.uk

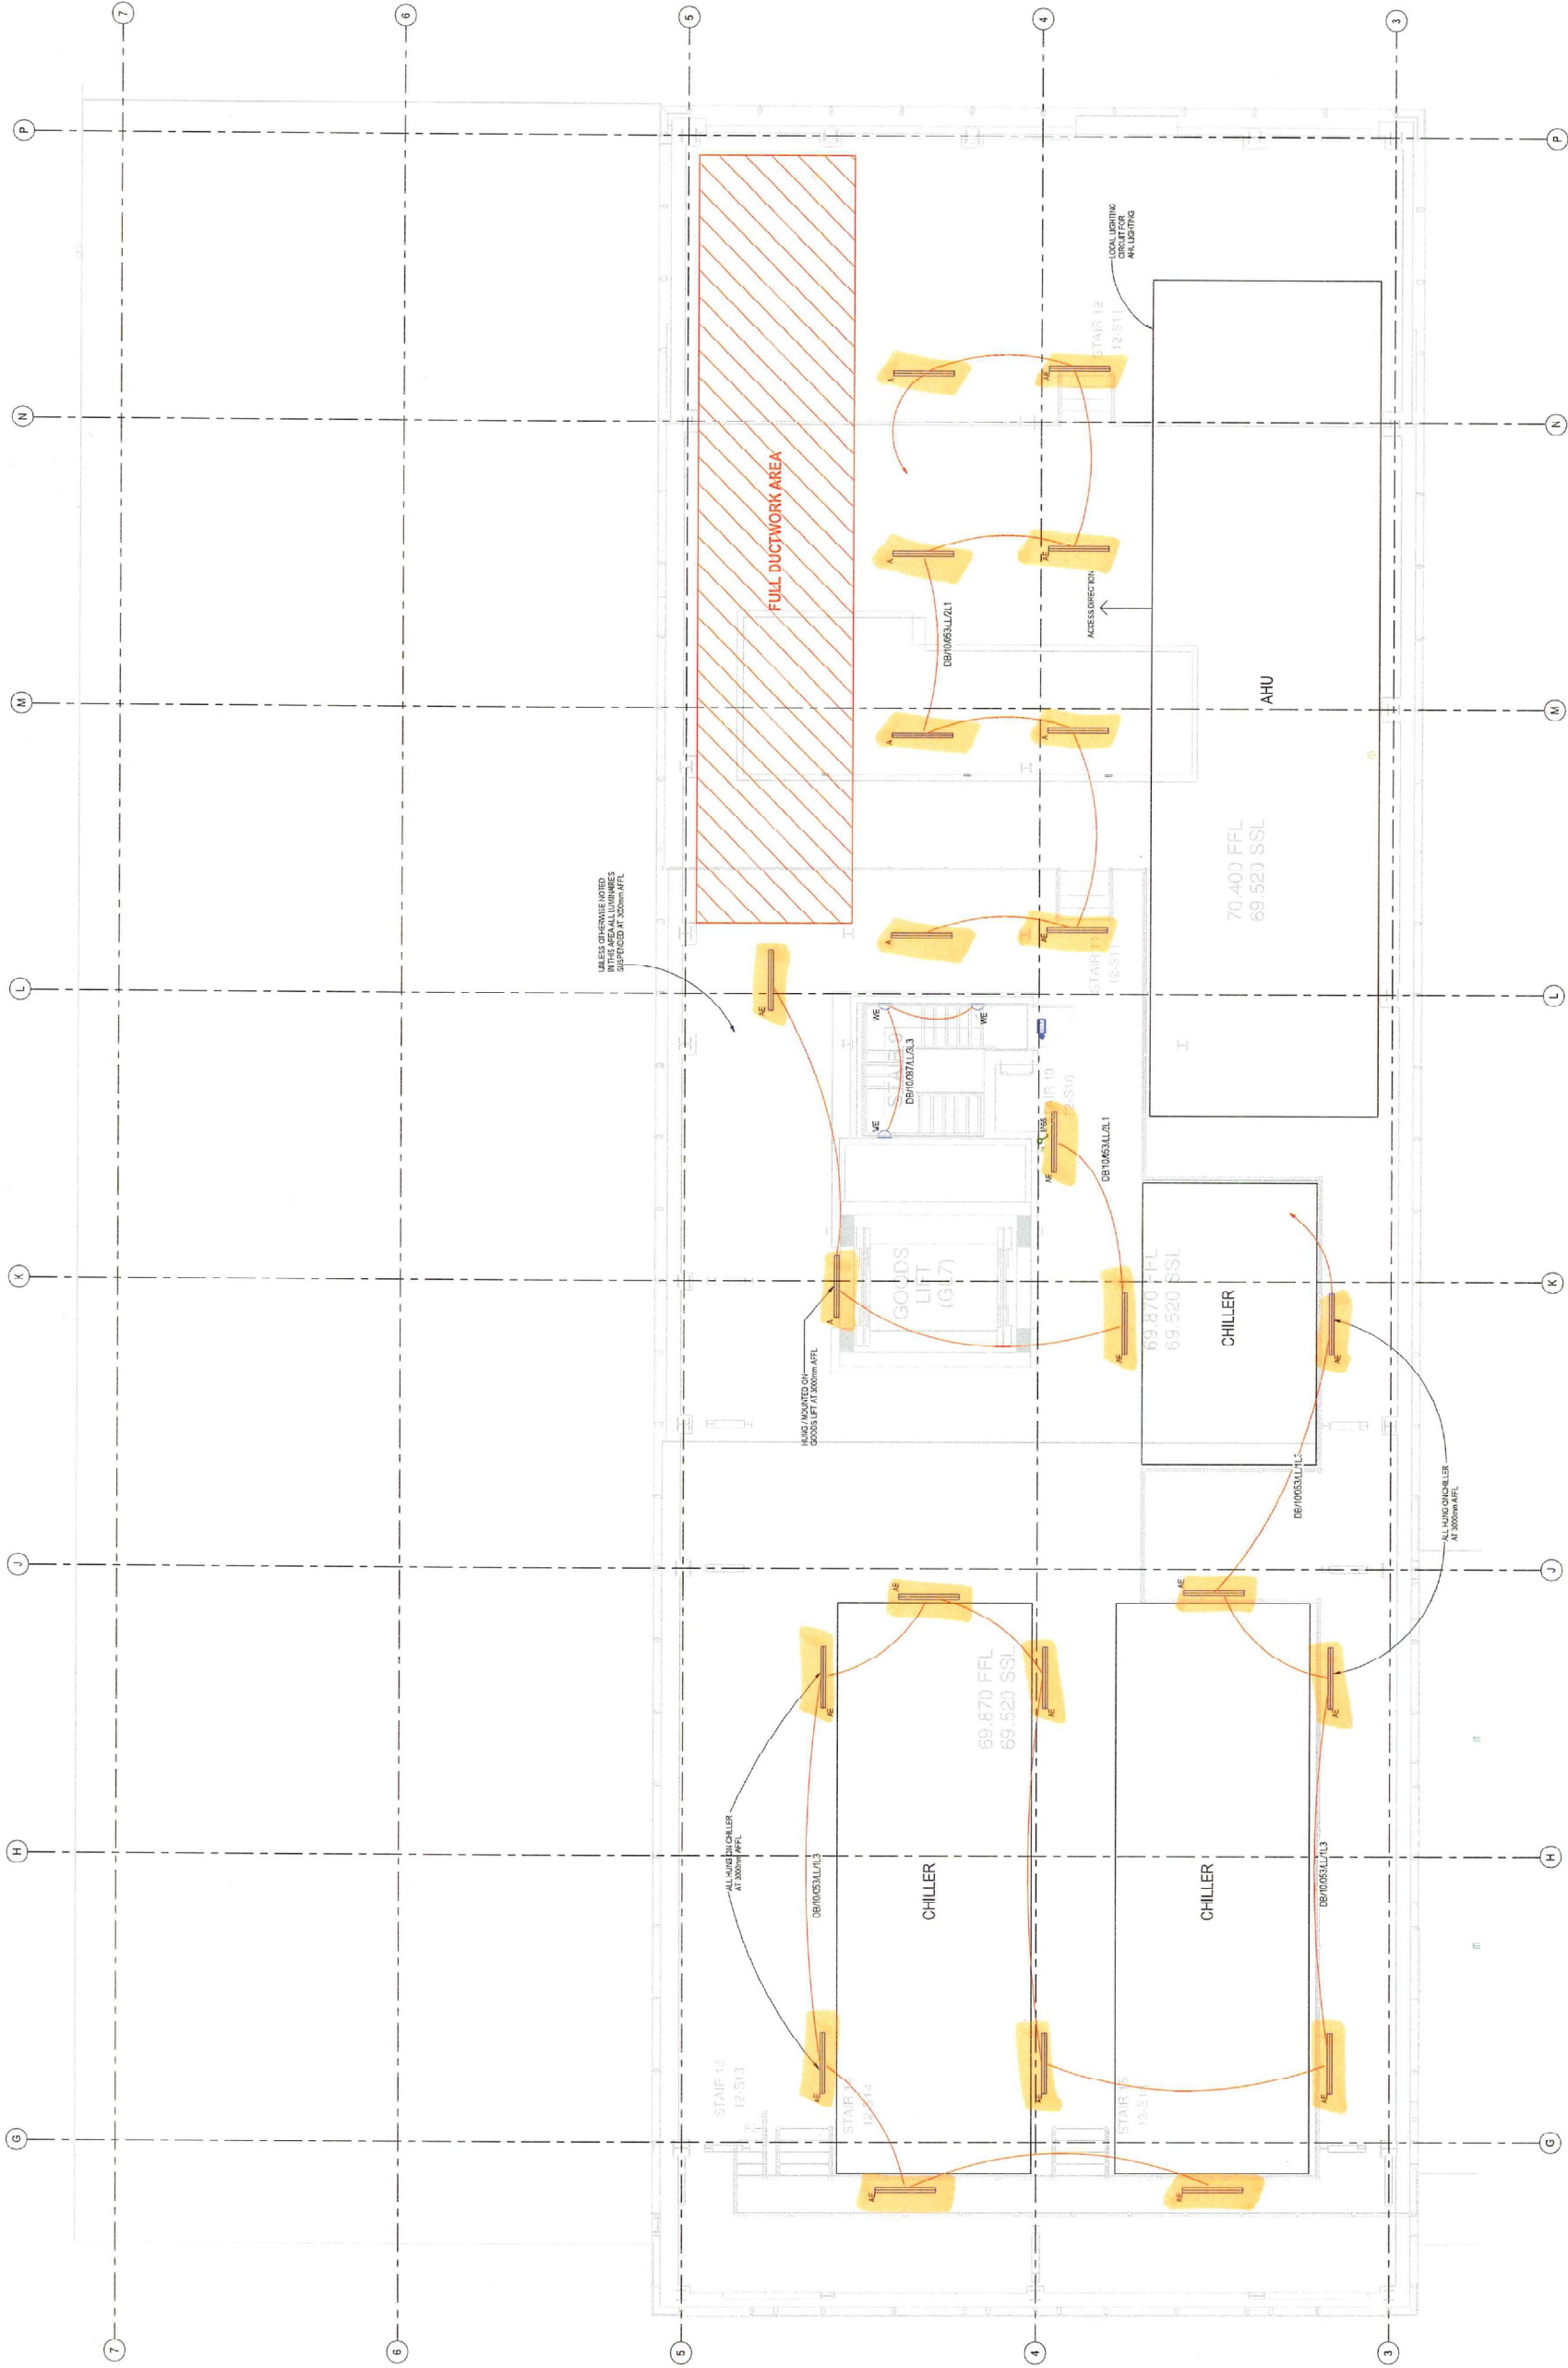

SAFETY HEALTH AND ENVIRONMENTAL INFORMATION BOX		
Construction Risk		NO SIGNIFICANT RISK
Maintenance/Operational Risk		NO SIGNIFICANT RISK
Demolition/Investigation Risk		NO SIGNIFICANT RISK

In addition to the hazards/risks normally associated with this type of work detailed on this drawing take note of the above. The contractor shall ensure that all workers are provided with a completed safety checklist, where appropriate, in an appropriate format/drawing.

NOTES FOR KINGS CROSS LIGHTING & CONTROL DRAWING:

1. All luminaires to be comply with DULI (dusttight), *knights* a be in accordance with the project luminaire schedule and employers requirement.
2. All wiring within luminaire body to have protective heat resistant cover device.
3. Batten mounted luminaires to be suspended at 3.0M APL unless otherwise noted.
4. Luminaires within 1.8m to be mounted at 1.8M to centre from floor or stair treads immediately below that luminaire.

PLEASE SEE DRAWING
KXC-S2-001-5161-E-60-2407 -
FOR LIGHTING IN HATCHED AREA

[illegible]

This drawing has been based on information taken from the

- Legend**
-  PI3 Presence detector
 -  PI4 Presence detector with photoacoustic
 -  Microwave detector
 -  On way Switch ("X" gang as indicated)
 -  Two way Switch ("Y" gang as indicated)
- [EXIT]** Emergency Exit
- [LDM]** Lighting Control Module

Credit Advances Updated: Renewal/Approval			
Rev P4	Down BI	Down BI	Down BI
	Down BI	Down BI	Down BI
Rev P3	Down BI	Down BI	Down BI
	Down BI	Down BI	Down BI
Rev P2	Down BI	Down BI	Down BI
	Down BI	Down BI	Down BI
Rev P1	Down BI	Down BI	Down BI
	Down BI	Down BI	Down BI

Overall Size

Subject	Score
1	85
2	78
3	92
4	88
5	75
6	82
7	90
8	77
9	84
10	89
11	76
12	81
13	91
14	87
15	79
16	83
17	93
18	86
19	74
20	80

Table 1

Project
KINGS CROSS ST

Title
Level 11 Lighting and
Lighting Control Layout

Drawing 14a.
KXC-S2-001-9161-E-60-2108

SAFETY/HEALTH AND ENVIRONMENTAL INFORMATION BOX	Contract Risks	NO SIGNIFICANT RISK
	Maintenance/Leasing Risks	NO SIGNIFICANT RISK
	Direct Contamination Risks	NO SIGNIFICANT RISK
	It is typical for the largest risks normally associated with the type of work detailed on this working plan to be the above. This working plan may be deemed valid by a competent contractor working under appropriate, i.e. in an appropriate method statement.	

[illegible]

NOTES FOR KING'S CROSS \$1 LIGHTING & CONTROL DRAWINGS

- [illegible]

Legend

- PIR Presence detector
- PIR Presence detector with photocell
- Microwave detector
- One way Switch ("X" gangas indicated)
- Two way Switch ("X" gangas indicated)
- Emergency Exit
- Lighting Control Module

NOTE

NOTES

LIGHTING LAYOUT WITHIN PLANT AREAS TO BE FINALISED ON COMPLETION OF COORDINATED PLANT ROOM LAYOUTS.

This drawing has been based on information taken from the following drawings -

REMARKS	DATE	TITLE
IOG-12-01-18179-20000X	24	Window Architecture (BU Model)
IOG-12-01-18179-128000X	48	Window Architecture (BU Model)
IOG-12-01-18179-561000	2	Fifth Floor GMP Plan
IOG-12-01-20225-0-2-1101	007	General Arrangement Level 10

Rev		Consolidated Release/Update Requested for Approval					
P3	Rev P3	Drawn BS	Date 02/07/16	Checked JH	Date 02/07/16	Approved MM	Date 02/07/16
P2	Rev P2	Requested for Approval					
P1	Rev P1	Drawn BS	Date 01/07/16	Checked JH	Date 01/07/16	Approved MM	Date 01/07/16
		For Approval					
		Drawn BS	Date 06/07/16	Checked JH	Date 06/07/16	Approved MM	Date 06/07/16

162

<u>Status</u>	<u>Stage</u>	<u>4E Decision</u>
S4 - For Stage Approval		

Client

CAPILLION

Project
KINGS CROSS S2

TS#
Level 10 Lighting and
Lighting Control Layout

Drinking H₂O
KXC-S2-001-9161-E-60-2107

SES (Engineering Services) Ltd
14th Floor
One Euston Square
London
NW1 2FD
(T) 02071 801800
(W) www.ses-1d.co.uk

