




100  
10  
0  
Millimetres

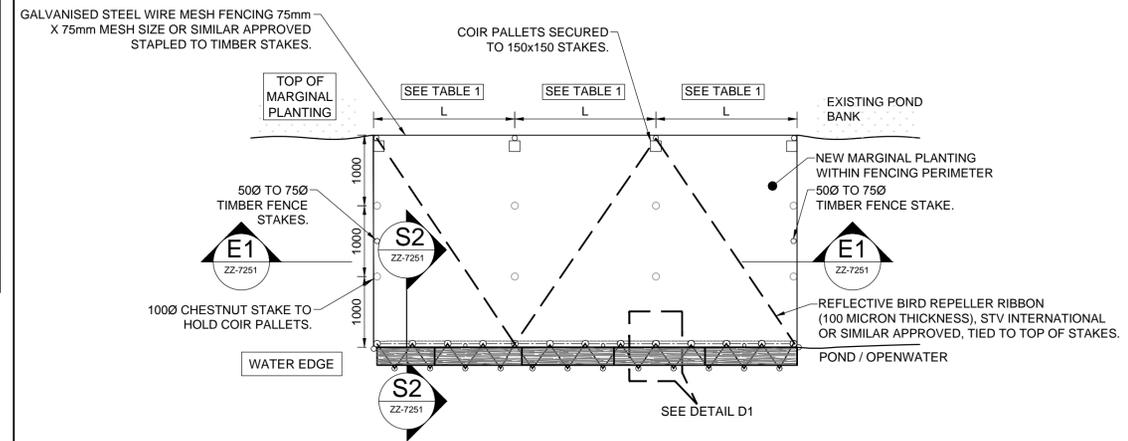


**PLAN ON TEMPORARY WILDFOWL FENCING**  
P1  
ZZ-7251  
SCALE 1: 1:50

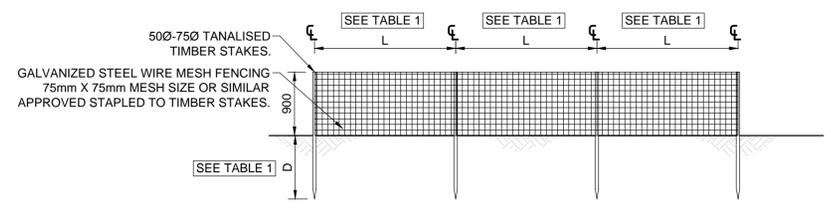


**ELEVATION ON TEMPORARY WILDFOWL FENCING**  
E1  
ZZ-7251  
SCALE 1: 1:50

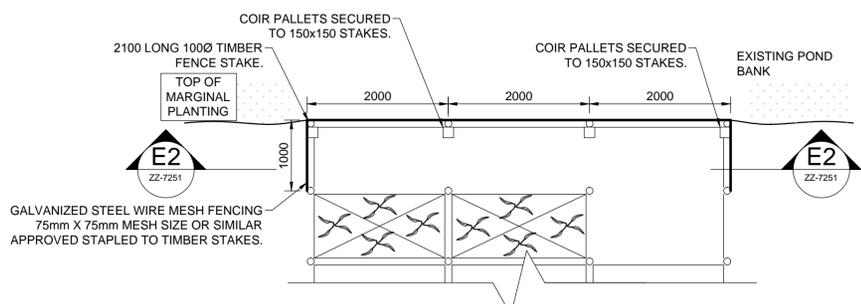


**PLAN ON PERMANENT WETLAND FENCING**  
P2  
ZZ-7251  
SCALE 1: 1:50

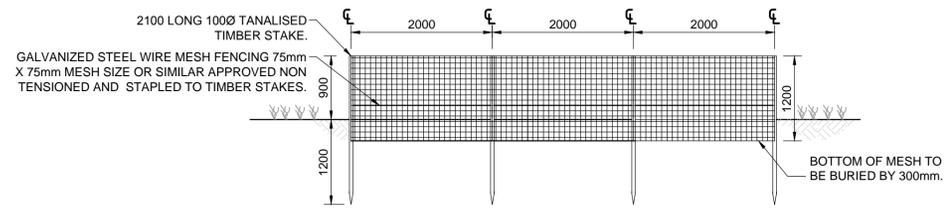

**ELEVATION PERMANENT WETLAND FENCING**  
E2  
ZZ-7251  
SCALE 1: 1:50

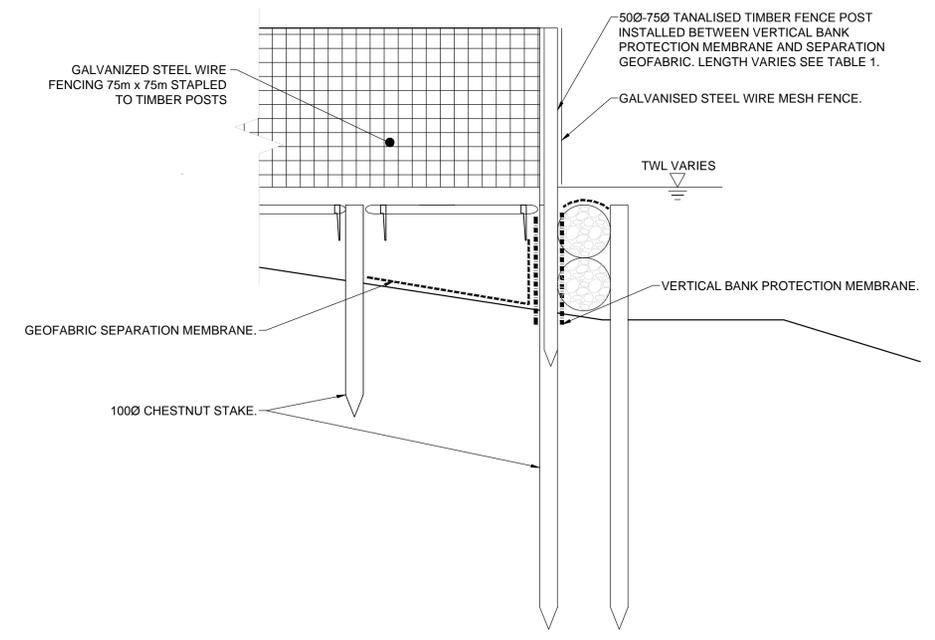

**TEMPORARY WILDFOWL FENCING POST DETAIL**  
S2  
ZZ-7251  
SCALE 1: 1:20

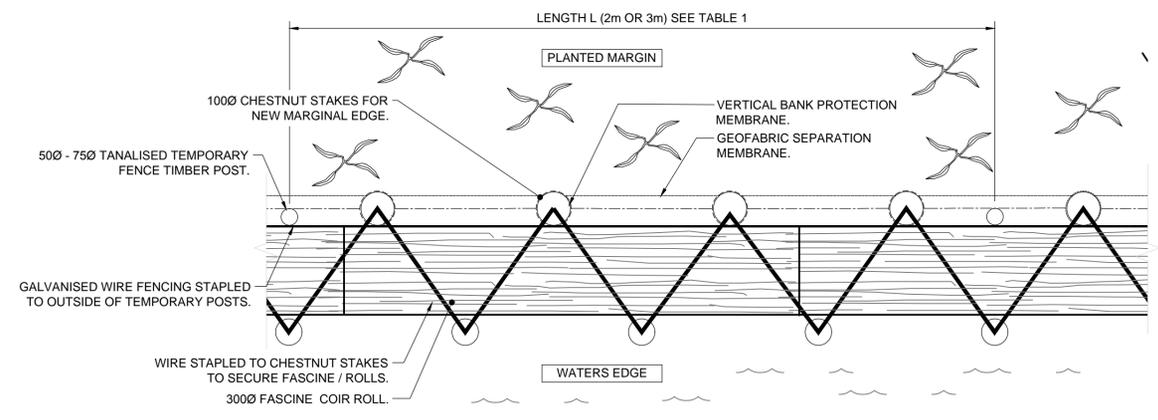

**DETAIL OF TEMPORARY WILDFOWL FENCING AT WATERS EDGE**  
D1  
ZZ-7251  
SCALE 1: 1:10

**SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION**

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following:

**CONSTRUCTION**

- DEEP WATER >1M CONDITIONS, COMBINED WITH SOFT POND BED SEDIMENTS, ARE LIKELY TO BE ENCOUNTERED IN PROXIMITY TO WORKING AREA REQUIRED TO INSTALL FENCING.
- CARE SHOULD BE TAKEN NOT TO DAMAGE ANY PLANTS WHEN INSTALLING FENCES.

**MAINTENANCE/CLEANING**

- DEEP WATER >1M CONDITIONS, COMBINED WITH SOFT POND BED SEDIMENTS, ARE LIKELY TO BE ENCOUNTERED IN PROXIMITY TO WORKING AREA REQUIRED TO MAINTAIN FENCING.

**DECOMMISSIONING/DEMOLITION**

- CARE SHOULD BE TAKEN NOT TO DAMAGE ANY PLANTS WHEN REMOVING TEMPORARY FENCING.
- OPTIONS FOR THE REUSE OF TEMPORARY FENCING MATERIALS ELSEWHERE ON SITE SHOULD BE EXPLORED.

It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement

1. ALL MEASUREMENTS IN MILLIMETRES AND LEVELS IN MAOD UNLESS OTHERWISE STATED.
2. ENSURE GOOD CONTACT BETWEEN GROUND LEVEL AND BOTTOM OF FENCING THROUGHOUT TREATMENT.
3. CARE TO BE TAKEN WHILST INSTALLING EXCLUSION FENCING TO MINIMISE TRAMPLING/ DISTURBANCE OF WETLAND PLANT COMMUNITIES.
4. REFLECTIVE BIRD DETERRENT RIBBON TO BE TIED SECURELY TO TOP OF TIMBER STAKES IN ARRANGEMENT AS SHOWN IN PLAN VIEWS AND PULLED TIGHT TO ENSURE UPTAKE OF SLACK FOR EFFECTIVE OPERATION.
5. TEMPORARY BIRD EXCLUSION FENCING TO BE INSTALLED TO PROTECT ALL NEWLY PLANTED POND MARGINS.
6. PERMANENT WETLAND AND LANDWARD TEMPORARY WILDFOWL FENCE AND POSTS TO BE LOCATED ON DRY LAND, 100MM OFF THE WETLAND MARGIN EXCEPT WHERE THE NEW MARGINAL SHEL F IS BOUNDED BY SHEET PILING OR OTHER HARD EDGE. IN SUCH CIRCUMSTANCES, THE PERMANENT WETLAND AND TEMPORARY WILDFOWL FENCE AND POSTS SHALL BE LOCATED ALONG THE LANDWARD EDGE OF THE WETLAND MARGIN, FOLLOWING THE LINE OF 1200 LONG TIMBER SUPPORT STAKES SECURING THE COIR PALLETS.

2 - DETAIL NUMBER OR ELEVATION, SECTION LETTER.  
P9-7501 - SHORTENED DRAWING NUMBER REFERENCE (5117039-ATK-P9-ZZ-DR-L-7501).

**TABLE 1 TEMPORARY WILDFOWL FENCE KEY DIMENSIONS**

	L	D
TYPE 1 GENERAL	2m	900mm
TYPE 2 FOR SPILLWAYS	3m	300mm

C1	11/12/2014	FOR CONSTRUCTION	JK	IPM	MJV
P2	24/10/2014	FOR COSTING	JA	-	-
P1	03/10/2014	FIT FOR COSTING	GJB	ITM	-

FOR CONSTRUCTION **A**

**ATKINS**  
Woodcote Grove  
Ashley Road  
Epsom  
Surrey  
KT18 5BW  
Tel: +44 (0)1372 726140  
Fax: +44 (0)1372 740055  
Copyright © Atkins Limited (2013) www.atkinsglobal.com

Client  
**City of London Corporation**

Project Title  
**HAMPSTEAD HEATH PONDS PROJECT**

Drawing Title  
**TEMPORARY BIRD & PERMANENT WETLAND FENCING DETAIL**

Scale	Designed	Drawn	Checked	Authorised
AS SHOWN	ITM	GJB	ITM	-
Original Size	Date	Date	Date	Date
A1	-	-	-	-
Drawing Number	Revision			
5117039-ATK-ZZ-ZZ-DR-L-7251	C1			