

Description/Application

V Line - Disposable pleated panel filters

Description

Disposable pleated panel filter made with both a water resistant card frame and retaining face. The V Line panel filters use a flame retardant, 100% thermally bonded polyester filter media backed with an expanded galvanised steel mesh.

Application

General heating and air-conditioning. As a pre-filter to bag filters.

Specification

EU Grade G4 Efficiency (>95%) 5 Micron Capacity Rated Capacity (CFM): 2018 Rated Capacity (M³/hr): 3430


Dimensions

Nominal (Inches): 24x24x4 Actual (mm): 594x594x95 Visual



Resistance

Initial Resistance: 1"/25MM: 40Pa 2"/50MM: 40Pa 4"/95MM: 40Pa Final Resistance: 1"/25MM: 150Pa 2"/50MM: 150Pa 4"/95MM: 150Pa

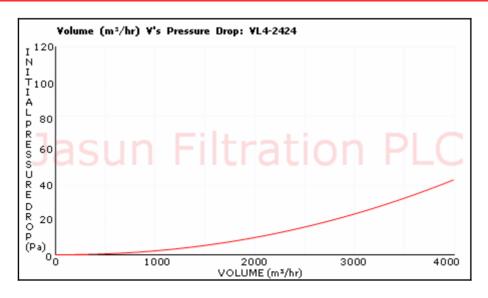





Riverside House, Parrett Way, Colley Lane, Bridgwater, Somerset TA6 5LB Tel: +44(0)1278 452277 Fax: +44(0)1278 450873 sales@jfilters.com www.jfilters.com

IASL

FM 29257 BS EN ISO 9001:2000