

Proposed 20-25cm girth tree planted at nursery level

Proposed Greenblue Urban's galvanised and powder coated steel tree guard bolted to tree grille frame, or similar approved model; Darwent (client to confirm)  
Colour: to be confirmed  
NBS: Q25.265A

Proposed granite chipping's to cover base of tree guard  
NBS: Q23.160A

Proposed 1.8x1.8m Greenblue Urban's 'Castle' galvanised recessed tree grille with inset paving, or similar approved grille trays width to accommodate full size paving unit and lined with geotextile  
NBS: Q10.305A

Paving Type 6 - Inset paving to recessed tree grille, laid on epoxy mortar bed  
NBS: Q25.310A

Proposed imported and approved topsoil  
NBS: Q28.330B

Proposed Greenblue Urban's root director (preformed root protection system), or similar approved  
NBS: Q31.312A

Tree grille concrete support  
To Manufacturer's specification

Proposed Greenblue Urban's Arborvent double inlet aeration/ irrigation system with pre-drilled paving unit to form lid, or similar approved  
NBS: Q31.512C

Proposed Greenblue Urban's geotextile laid over stratacell structure system, or similar approved  
NBS: Q31.510B

Proposed Greenblue Urban's stratacell structure, or similar approved. Soil structure loaded with imported and approved topsoil  
NBS: Q31.512F

Paving Type 7 - Granite cubes paving  
NBS: Q25.330A

Paving build-up  
To Engineers specification

Discrete channel drain  
Type 1  
To Engineers specification

Indicative rootball size to be confirmed by selected nursery

Proposed Greenblue Urban's integrated Rootrain precinct & Arborvent, or similar approved  
Installed to Manufacturer's specification/recommendations  
NBS: Q31.512C

Tree Uplighter  
To Engineers specification

Void Former /Sub-base  
To Engineers specification

Inset paving to recessed inspection access cover, laid on epoxy mortar bed

Indicative gully inspection pipe  
To Engineers specification

Indicative recessed inspection access cover  
To Engineers specification

VARIES

SSL +26.750 (VARIES, REFER TO ARCHITECTS DESIGN)

SSL +26.190 (VARIES, REFER TO ARCHITECTS DESIGN)

Insulation Layer  
To Architects specification

Slab Waterproofing  
To Specialists information

Structural Suspended Slab  
To Engineers design

Proposed Bauder's plt10 10mm drainage board with filter fleece, or similar approved to provide vertical drainage. board to be installed to all sides of tree pit  
NBS: Q31.350A

Proposed Greenblue Urban's Arborguy deadman guying system, or similar approved  
Installed to Manufacturer's specification/recommendations  
NBS: Q31.512E

Proposed Bauder's dse40 40mm drainage and protection mat with filter fleece, or similar approved  
NBS: Q31.350

Insulation Layer  
To Architects specification

Slab Waterproofing  
To Specialists information


Structural Suspended Slab  
To Engineers design

Indicative location and size of tree pit drainage gully  
To Engineers detail and specification

**General Notes:**


- This drawing is the property of fabrik. It must not be copied or reproduced without written consent.
- This drawing shall be read in conjunction with all relevant contract drawings and fabrik Landscape Specification with any conflicting information to be brought to the attention of fabrik before work commences
- All dimensions are in millimetres unless otherwise specified
- All levels in metres unless otherwise specified
- Only figured dimensions are to be taken from this drawing. All contractors must visit site and be responsible for taking and checking all dimensions related to the works shown on the drawing.
- All dimensions and sizes of units to be verified by the contractor on shop drawings for each element before the commencement of works
- All construction base layers to engineer's specification
- All steelwork to be galvanised unless otherwise stated
- All concrete structures/members to structural engineer's/architect's detail
- All supports/fixings to manufacturer's/engineer's detail
- All exposed concrete faces to waterproofing engineer's/contractor's details
- All eyebolts to be stainless steel unless otherwise specified and to engineers detail
- All trees/shrubs/hedges planted at nursery level
- Falls are for guidance purposes only, setting out shall be to spot levels
- All concrete paving and associated foundation to comply with BS 7533:2006 Pavements constructed with clay, natural stone or concrete pavers;

**Location Plan:**

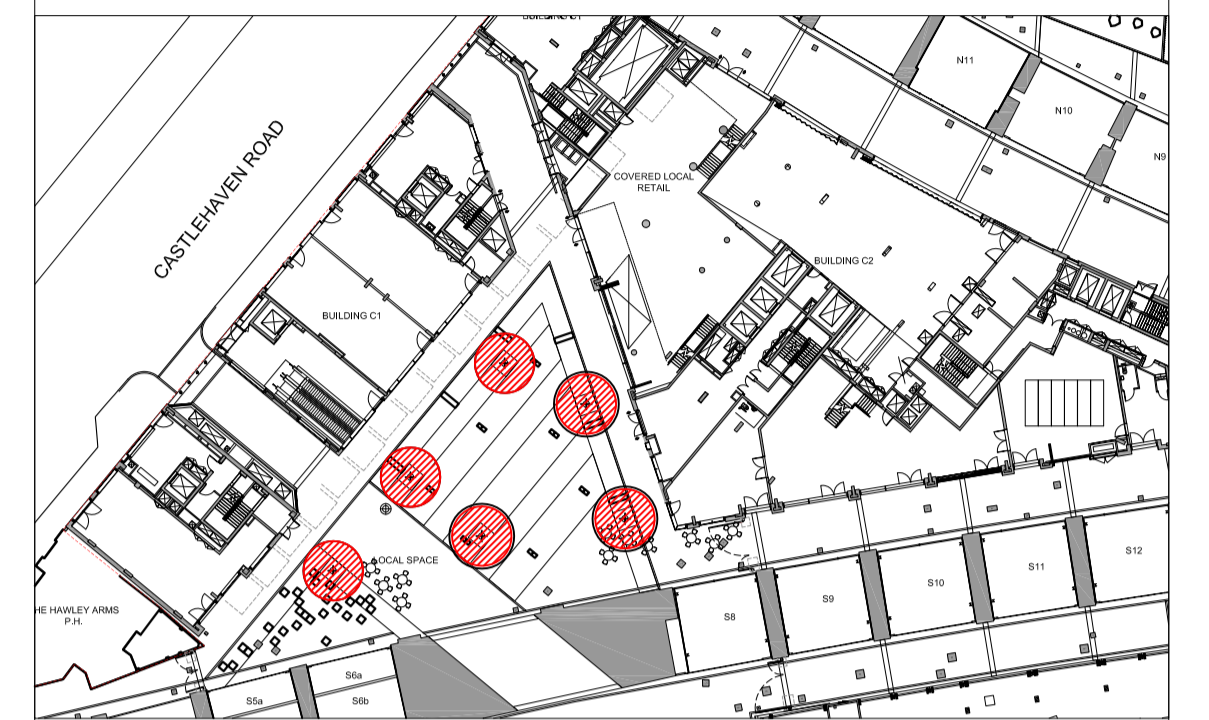

No.	Date	Reason	Name
P1	23.04.18	Issued for planning approval	mn
C2	28.07.17	Issued for Construction Post VE	mb
C1	12.04.17	Issued for Construction	mb

Revisions



**fabrik**

First Floor  
4-8 Emerson Street  
London  
SE1 9DU

T: 0207 620 1453  
F: 0207 261 9126  
E: london@fabrik.com  
W: www.fabrikuk.com

Project  
**Camden Lock Village, Camden for MACE**

Drawing  
**Tree Pit in Structural Concrete Slab - Typical Detail**

Scale	Date	Checked	Drawn
1:20 @ A1	March '17	NB	MB

Drawing No.	Revision
D2456 L.454	P1

<input type="checkbox"/> Preliminary	<input type="checkbox"/> Issued for Design/Information
<input checked="" type="checkbox"/> Issued for Planning Approval	<input type="checkbox"/> Issued for Tender
<input type="checkbox"/> Issued for Construction	<input type="checkbox"/> As Built

Drawing sheet size - A1

Copyright Reserved ©