



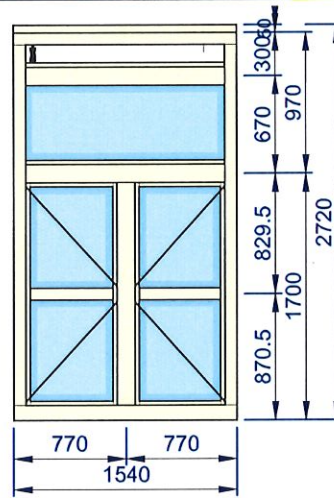

| | | | | |
|------------------|-------|------------------|-------------------------|--|
| Quotation S-3327 | | 11/06/18 | Your references: 153924 | Production dimensions |
| Window 001 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |

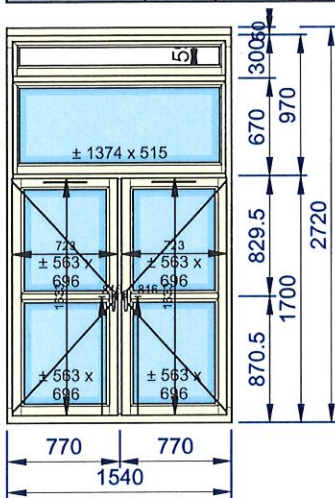

1/50 - Inner view

Spot: W1

1/50 - Outer view

| | Description | Timber/Color |
|----------------------|---|-----------------|
| Outer frame | THERMO80 | Wood PINE |
| Frame dripcup | White RAL9016 | FINGERJOINTED |
| colour | | 200+ colour |
| Colour of gasket for | Black | RAL9016 Traffic |
| frame dripcup | | white |
| Threshold type | Timber standard threshold | |
| Threshold - type of | Cut from outside 12x30 mm + cut from | |
| undercuts | inside 11x30 mm | |
| External timber sill | 120mm Sill | |
| Transom(s) | Frame transom (horizontal); Frame mullion | |
| | (vertical) | |
| Mullion width | 124mm | |
| Additional profiles | Frame widener 80x50mm on top (Included) | |
| Fixed in factory | Fixed in factory | |
| or to be send | | |
| loose | | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 001 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|

| | Description | Timber/Color |
|---|---|---|
| Sash 1 | Single sash Sash dripcup Silicone colour outside / inside Main gasket colour Additional edge(rebate) gasket in sash - colour Installation of glass | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | Standard glazing in factory Turn white Colour of hinges covers Type of handle Lockable handle NY Colour of handle white 90 degrees opening restrictor With opening restrictor Smooth turning option Without Smooth turning option Vent in sash Trimvent 90 HL 425 white Colour of TRIMVENT hood from outside Colour of TRIMVENT hood RAL... 9016 Opening restrictor OBV Opening restrictor colour white | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Transom(s) Construction bar width | Sash structural construction bar 80mm | |
| Sash 2 | Single sash Sash dripcup Silicone colour outside / inside Main gasket colour Additional edge(rebate) gasket in sash - colour Installation of glass | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | Standard glazing in factory Turn white Colour of hinges covers Type of handle Lockable handle NY Colour of handle white 90 degrees opening restrictor With opening restrictor Smooth turning option Without Smooth turning option Vent in sash Trimvent 90 HL 425 white Colour of TRIMVENT hood from outside Colour of TRIMVENT hood RAL... 9016 Opening restrictor OBV Opening restrictor colour white | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Transom(s) Construction bar width | Sash structural construction bar 80mm | |
| Sash 3 | Fixedlight - glazing in frame + bottom counterprofile Sash dripcup Silicone colour outside / inside Installation of glass | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | Standard glazing in factory | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 001 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASMENT OPENING |
|------------|-------|------------------|-------------------------|---|


| | Description | Timber/Color |
|--------|---|---|
| | Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 4 | Fixedlight - glazing in frame + bottom counterprofile <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Installation of glass</i> | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | <i>White sash dripcup RAL9016</i> <i>Transparent</i> Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Panels | Sandwich panel pine 4/16/4 mm | |

Message
Outer frame THERMO80: Position certified FSC.
Outer frame THERMO80: Timber surface - gloss level 25-30%


| Articles | Quantity | Dimension |
|---|----------|-----------|
| Position area (m2) | 4,112 | |
| Trimvent SW canopy TA4292/026 RAL9016 L=481mm | 2,000 | |

| Glazings and panels | Dimensions |
|---|------------|
| 01.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 01.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 03.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 002 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|

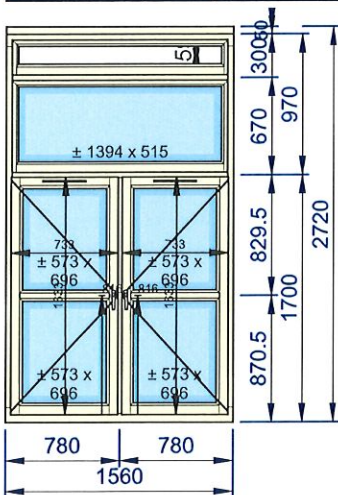

1/50 - Inner view
Spot: W2

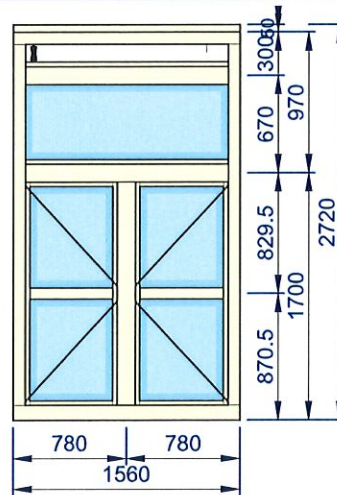

1/50 - Outer view

| Description | Timber/Color |
|-------------|--------------|
|-------------|--------------|

Outer frame

| | | | |
|---------------------|----------|-------------------------|-----------------------|
| Quotation AB-S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|---------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 002 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|

| | Description | Timber/Color |
|--|---|--|
| Outer frame Frame dripcup colour Colour of gasket for frame dripcup Threshold type Threshold - type of undercuts External timber sill Transom(s) Mullion width Additional profiles Fixed in factory or to be send loose | THERMO80 White RAL9016 Black Timber standard threshold Cut from outside 12x30 mm + cut from inside 11x30 mm 120mm Sill Frame transom (horizontal); Frame mullion (vertical) 124mm Frame widener 80x50mm on top (Included) Fixed in factory | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 1 Sash dripcup Silicone colour outside / inside Main gasket colour Additional edge(rebate) gasket in sash - colour Installation of glass Colour of hinges covers Type of handle Colour of handle 90 degrees opening restrictor Smooth turning option Vent in sash Colour of TRIMVENT hood from outside Colour of TRIMVENT hood RAL... Opening restrictor OBV Transom(s) Construction bar width | Single sash White sash dripcup RAL9016 Transparent Deventer grey Deventer grey Standard glazing in factory Turn white Lockable handle NY white With opening restrictor Without Smooth turning option Trimvent 90 HL 425 white From RALpalette 9016 Opening restrictor colour white Sash structural construction bar 80mm | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 2 Sash dripcup Silicone colour outside / inside Main gasket colour Additional edge(rebate) gasket in sash - colour Installation of glass | Single sash White sash dripcup RAL9016 Transparent Deventer grey Deventer grey Standard glazing in factory | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 002 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white |
|------------|-------|------------------|-------------------------|---|

| | Description | Timber/Color |
|--|--|--|
| <i>Colour of hinges covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening restrictor</i> <i>Smooth turning option</i> <i>Vent in sash</i> <i>Colour of TRIMVENT hood from outside</i> <i>Colour of TRIMVENT hood RAL...</i> <i>Opening restrictor OBV</i> Transom(s) Construction bar width | Turn <i>white</i> Lockable handle NY <i>white</i> With opening restrictor Without Smooth turning option Trimvent 90 HL 425 white From RALpalette 9016 Opening restrictor colour white Sash structural construction bar 80mm | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 3 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Installation of glass</i> | Fixedlight - glazing in frame + bottom counterprofile White sash dripcup RAL9016 Transparent Standard glazing in factory Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 4 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Installation of glass</i> | Fixedlight - glazing in frame + bottom counterprofile White sash dripcup RAL9016 Transparent Standard glazing in factory Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Panels | Sandwich panel pine 4/16/4 mm | |

Message

Outer frame THERMO80: Position certified FSC.



Outer frame THERMO80: Timber surface - gloss level 25-30%

| Articles | Quantity | Dimension |
|---|----------|-----------|
| Position area (m2) | 4,165 | |
| Trimvent SW canopy TA4292/026 RAL9016 L=481mm | 2,000 | |

| Glazings and panels | Dimensions |
|---|------------|
| 01.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 01.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 03.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 003 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white -CASEMENT OPENING |
|------------|-------|------------------|-------------------------|---|

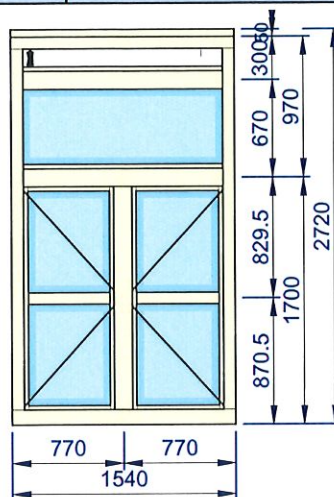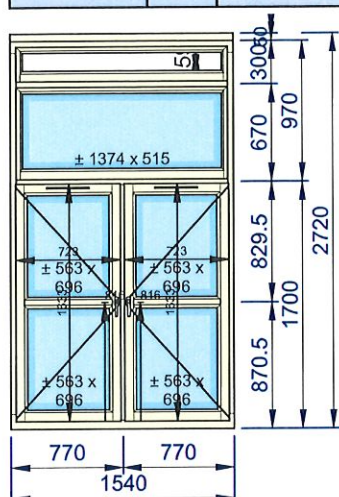

1/50 - Inner view
Spot: W3

1/50 - Outer view

| | Description | Timber/Color |
|---|--|-----------------------|
| Outer frame | THERMO80 | Wood PINE |
| Frame dripcup colour | White RAL9016 | FINGERJOINTE |
| Colour of gasket for frame dripcup | Black | 200+ colour |
| Threshold type | Timber standard threshold | RAL9016 Traffic white |
| Threshold - type of undercuts | Cut from outside 12x30 mm + cut from inside 11x30 mm | |
| External timber sill | 120mm Sill | |
| Transom(s) | Frame transom (horizontal); Frame mullion (vertical) | |
| Mullion width | 124mm | |
| Additional profiles | Frame widener 80x50mm on top (Included) | |
| Fixed in factory or to be send loose | Fixed in factory | |
| Sash 1 | Single sash | Wood PINE |
| Sash dripcup | White sash dripcup RAL9016 | FINGERJOINTE |
| Silicone colour outside / inside | Transparent | 200+ colour |
| Main gasket colour | Deventer grey | RAL9016 Traffic white |
| Additional edge(rebate) gasket in sash - colour | Deventer grey | |
| Installation of glass | Standard glazing in factory | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 003 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white |
|------------|-------|------------------|-------------------------|---|

| | Description | Timber/Color |
|---|---|--|
| <i>Colour of hinges covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening restrictor</i> <i>Smooth turning option</i> <i>Vent in sash</i> <i>Colour of TRIMVENT hood from outside</i> <i>Colour of TRIMVENT hood RAL...</i> <i>Opening restrictor OBV</i> Transom(s) Construction bar width | Turn <i>white</i> Lockable handle NY <i>white</i> With opening restrictor Without Smooth turning option Trimvent 90 HL 425 white From RALpalette 9016 Opening restrictor colour white Sash structural construction bar 80mm | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 2 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Main gasket colour</i> <i>Additional edge(rebate) gasket in sash - colour</i> <i>Installation of glass</i> <i>Colour of hinges covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening restrictor</i> <i>Smooth turning option</i> <i>Vent in sash</i> <i>Colour of TRIMVENT hood from outside</i> <i>Colour of TRIMVENT hood RAL...</i> <i>Opening restrictor OBV</i> Transom(s) Construction bar width | Single sash <i>White sash dripcup RAL9016</i> <i>Transparent</i> Deventer grey Deventer grey Standard glazing in factory Turn <i>white</i> Lockable handle NY <i>white</i> With opening restrictor Without Smooth turning option Trimvent 90 HL 425 white From RALpalette 9016 Opening restrictor colour white Sash structural construction bar 80mm | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 3 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Installation of glass</i> | Fixedlight - glazing in frame + bottom counterprofile <i>White sash dripcup RAL9016</i> <i>Transparent</i> Standard glazing in factory Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 4 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Installation of glass</i> | Fixedlight - glazing in frame + bottom counterprofile <i>White sash dripcup RAL9016</i> <i>Transparent</i> Standard glazing in factory | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 003 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|


| | Description | Timber/Color |
|--------|---------------------------------------|---|
| | Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Panels | Sandwich panel pine 4/16/4 mm | |

Message
Outer frame THERMO80: Position certified FSC.
Outer frame THERMO80: Timber surface - gloss level 25-30%


| Articles | Quantity | Dimension |
|---|----------|-----------|
| Position area (m2) | 4,112 | |
| Trimvent SW canopy TA4292/026 RAL9016 L=481mm | 2,000 | |

| Glazings and panels | Dimensions |
|---|------------|
| 01.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 01.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 03.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 004 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|

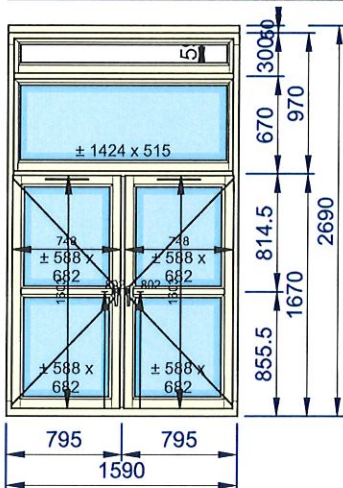

1/50 - Inner view
Spot: W4

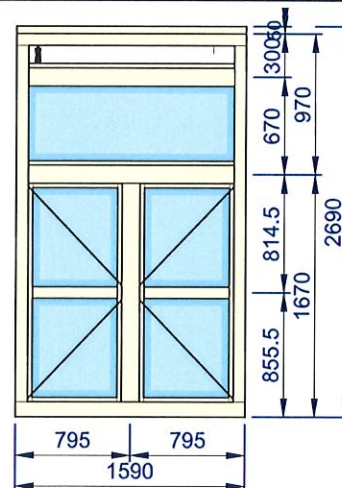

1/50 - Outer view

| | Description | Timber/Color |
|------------------------------------|--|---|
| Outer frame | THERMO80 | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Frame dripcup colour | White RAL9016 | |
| Colour of gasket for frame dripcup | Black | |
| Threshold type | Timber standard threshold | |
| Threshold - type of undercuts | Cut from outside 12x30 mm + cut from inside 11x30 mm | |
| External timber sill | 120mm Sill | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 004 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white -CASEMENT OPENING |
|------------|-------|------------------|-------------------------|---|

| | Description | Timber/Color |
|--|---|--|
| Transom(s) <i>Mullion width</i> Additional profiles Fixed in factory or to be send loose | Frame transom (horizontal); Frame mullion (vertical) <i>124mm</i> Frame widener 80x50mm on top (Included) Fixed in factory | |
| Sash 1 <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Main gasket colour</i> <i>Additional</i> <i>edge(rebate) gasket</i> <i>in sash - colour</i> <i>Installation of glass</i> <i>Colour of hinges</i> <i>covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening</i> <i>restrictor</i> <i>Smooth turning</i> <i>option</i> <i>Vent in sash</i> <i>Colour of</i> <i>TRIMVENT hood</i> <i>from outside</i> <i>Colour of</i> <i>TRIMVENT hood</i> <i>RAL...</i> <i>Opening restrictor</i> <i>OBV</i> Transom(s) Construction bar width | Single sash <i>White sash dripcup RAL9016</i> <i>Transparent</i> <i>Deventer grey</i> <i>Deventer grey</i> <i>Standard glazing in factory</i> Turn <i>white</i> <i>Lockable handle NY</i> <i>white</i> <i>With opening restrictor</i> <i>Without Smooth turning option</i> <i>Trimvent 90 HL 425 white</i> <i>From RALpalette</i> <i>9016</i> <i>Opening restrictor colour white</i> Sash structural construction bar 80mm | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 2 <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Main gasket colour</i> <i>Additional</i> <i>edge(rebate) gasket</i> <i>in sash - colour</i> <i>Installation of glass</i> <i>Colour of hinges</i> <i>covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening</i> <i>restrictor</i> <i>Smooth turning</i> <i>option</i> <i>Vent in sash</i> <i>Colour of</i> <i>TRIMVENT hood</i> <i>from outside</i> <i>Colour of</i> <i>TRIMVENT hood</i> <i>RAL...</i> <i>Opening restrictor</i> <i>OBV</i> Transom(s) Construction bar width | Single sash <i>White sash dripcup RAL9016</i> <i>Transparent</i> <i>Deventer grey</i> <i>Deventer grey</i> <i>Standard glazing in factory</i> Turn <i>white</i> <i>Lockable handle NY</i> <i>white</i> <i>With opening restrictor</i> <i>Without Smooth turning option</i> <i>Trimvent 90 HL 425 white</i> <i>From RALpalette</i> <i>9016</i> <i>Opening restrictor colour white</i> Sash structural construction bar 80mm | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 004 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white -CASEMENT OPENING |
|------------|-------|------------------|-------------------------|---|

| | Description | Timber/Color |
|--------|---|---|
| Sash 3 | Fixedlight - glazing in frame + bottom counterprofile <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Installation of glass</i> | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | <i>White sash dripcup RAL9016</i> <i>Transparent</i> <i>Standard glazing in factory</i> Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 4 | Fixedlight - glazing in frame + bottom counterprofile <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Installation of glass</i> | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | <i>White sash dripcup RAL9016</i> <i>Transparent</i> <i>Standard glazing in factory</i> Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Panels | Sandwich panel pine 4/16/4 mm | |

Message

Outer frame THERMO80: Position certified FSC.



Outer frame THERMO80: Timber surface - gloss level 25-30%

| Articles | Quantity | Dimension |
|---|----------|-----------|
| Position area (m2) | 4,198 | |
| Trimvent SW canopy TA4292/026 RAL9016 L=481mm | 2,000 | |

| Glazings and panels | Dimensions |
|---|------------|
| 01.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 01.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 03.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 005 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white -CASEMENT OPENING |
|------------|-------|------------------|-------------------------|---|

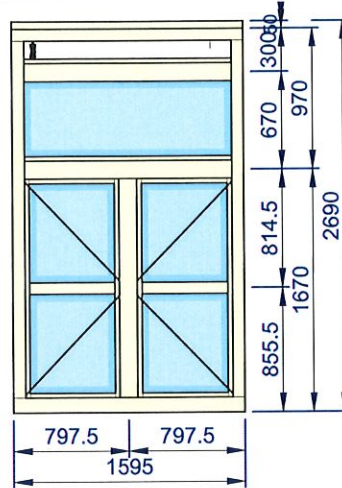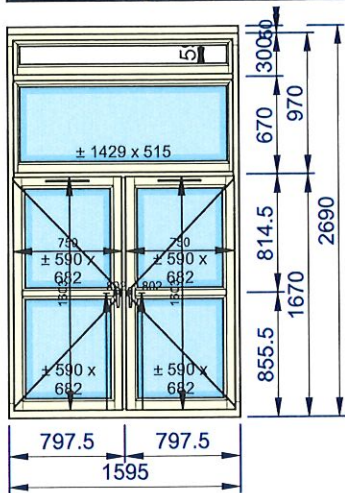

1/50 - Inner view
Spot: W5

1/50 - Outer view

| | Description | Timber/Color |
|---|--|---|
| Outer frame | THERMO80 | Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white |
| Frame dripcup colour | White RAL9016 | |
| Colour of gasket for frame dripcup | Black | |
| Threshold type | Timber standard threshold | |
| Threshold - type of undercuts | Cut from outside 12x30 mm + cut from inside 11x30 mm | |
| External timber sill | 120mm Sill | |
| Transom(s) | Frame transom (horizontal); Frame mullion (vertical) | |
| Mullion width | 124mm | |
| Additional profiles | Frame widener 80x50mm on top (Included) | |
| Fixed in factory or to be send loose | Fixed in factory | |
| Sash 1 | Single sash | Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white |
| Sash dripcup | White sash dripcup RAL9016 | |
| Silicone colour outside / inside | Transparent | |
| Main gasket colour | Deventer grey | |
| Additional edge(rebate) gasket in sash - colour | Deventer grey | |
| Installation of glass | Standard glazing in factory | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|---|
| Window 005 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white -CASEMENT OPENING |
|------------|-------|------------------|-------------------------|---|

| | Description | Timber/Color |
|---|---|--|
| <i>Colour of hinges covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening restrictor</i> <i>Smooth turning option</i> <i>Vent in sash</i> <i>Colour of TRIMVENT hood from outside</i> <i>Colour of TRIMVENT hood RAL...</i> <i>Opening restrictor OBV</i> Transom(s) Construction bar width | Turn <i>white</i> Lockable handle NY <i>white</i> With opening restrictor Without Smooth turning option Trimvent 90 HL 425 white From RALpalette 9016 Opening restrictor colour white | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 2 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Main gasket colour</i> <i>Additional edge(rebate) gasket in sash - colour</i> <i>Installation of glass</i> <i>Colour of hinges covers</i> <i>Type of handle</i> <i>Colour of handle</i> <i>90 degrees opening restrictor</i> <i>Smooth turning option</i> <i>Vent in sash</i> <i>Colour of TRIMVENT hood from outside</i> <i>Colour of TRIMVENT hood RAL...</i> <i>Opening restrictor OBV</i> Transom(s) Construction bar width | Single sash <i>White sash dripcup RAL9016</i> <i>Transparent</i> Deventer grey Deventer grey Standard glazing in factory Turn <i>white</i> Lockable handle NY <i>white</i> With opening restrictor Without Smooth turning option Trimvent 90 HL 425 white From RALpalette 9016 Opening restrictor colour white | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 3 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Installation of glass</i> | Fixedlight - glazing in frame + bottom counterprofile <i>White sash dripcup RAL9016</i> <i>Transparent</i> Standard glazing in factory Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 4 <i>Sash dripcup</i> <i>Silicone colour outside / inside</i> <i>Installation of glass</i> | Fixedlight - glazing in frame + bottom counterprofile <i>White sash dripcup RAL9016</i> <i>Transparent</i> Standard glazing in factory | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |

| | | | | |
|------------------|----------|-------------------------|-------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Handled by KORVAI | Production dimensions |
|------------------|----------|-------------------------|-------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 005 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|



| | Description | Timber/Color |
|--------|---------------------------------------|---|
| | Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white |
| Panels | Sandwich panel pine 4/16/4 mm | |

Message
Outer frame THERMO80: Position certified FSC.
Outer frame THERMO80: Timber surface - gloss level 25-30%

| Articles | Quantity | Dimension |
|---|----------|-----------|
| Position area (m2) | 4,211 | |
| Trimvent SW canopy TA4292/026 RAL9016 L=481mm | 2,000 | |

| Glazings and panels | Dimensions |
|---|------------|
| 01.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 01.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 03.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 006 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|

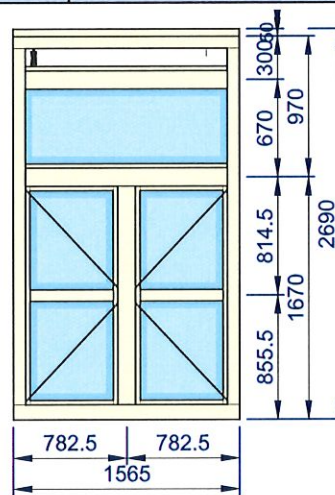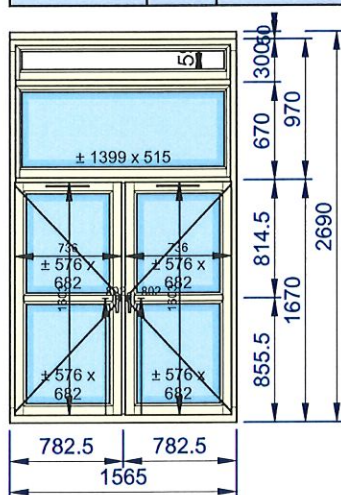

1/50 - Inner view
Spot: W6

1/50 - Outer view

| | Description | Timber/Color |
|------------------------------------|--|---|
| Outer frame | THERMO80 | Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white |
| Frame dripcup colour | White RAL9016 | |
| Colour of gasket for frame dripcup | Black | |
| Threshold type | Timber standard threshold | |
| Threshold - type of undercuts | Cut from outside 12x30 mm + cut from inside 11x30 mm | |
| External timber sill | 120mm Sill | |

| | | | |
|------------------|----------|-------------------------|-----------------------|
| Quotation S-3327 | 11/06/18 | Your references: 153924 | Production dimensions |
|------------------|----------|-------------------------|-----------------------|

| | | | | |
|------------|-------|------------------|-------------------------|--|
| Window 006 | Qty 1 | System: THERMO80 | Glazing beads: THERMO80 | Timber/Color: Wood PINE FINGERJOINTED 200+ colour RAL9016 Traffic white - CASEMENT OPENING |
|------------|-------|------------------|-------------------------|--|

| | Description | Timber/Color |
|--------|---|---|
| Sash 3 | Fixedlight - glazing in frame + bottom counterprofile <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Installation of glass</i> | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | <i>White sash dripcup RAL9016</i> <i>Transparent</i> <i>Standard glazing in factory</i> Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Sash 4 | Fixedlight - glazing in frame + bottom counterprofile <i>Sash dripcup</i> <i>Silicone colour</i> <i>outside / inside</i> <i>Installation of glass</i> | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| | <i>White sash dripcup RAL9016</i> <i>Transparent</i> <i>Standard glazing in factory</i> Fixedlight with bottom counterprofile | Wood PINE FINGERJOINTEI 200+ colour RAL9016 Traffic white |
| Panels | Sandwich panel pine 4/16/4 mm | |

Message

Outer frame THERMO80: Position certified FSC.

Outer frame THERMO80: Timber surface - gloss level 25-30%

| Articles | Quantity | Dimension |
|---|----------|-----------|
| Position area (m2) | 4,132 | |
| Trimvent SW canopy TA4292/026 RAL9016 L=481mm | 2,000 | |

| Glazings and panels | Dimensions |
|---|------------|
| 01.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 01.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 02.02: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |
| 03.01: 4Tough/16ArTGI7040/4Tough LowE U=1,1 | |