

EXETER SHELTER

Product Description:

Anodised aluminium tubular uprights 50mm diameter for assembly with cast aluminium connectors, locked in place with stainless steel screws.

Roof and cladding: 10mm translucent anti-UV cellular polycarbonate glazing panels on an anodised aluminium profile frame.

Bike rack pictured not included, fits high low rack perfectly.

Designed to be directly concreted into the ground.

Can easily be extended.


Delivery time: typically 14-21 working days.

Additional Information:

Dimensions: 2570mm x 1970mm x 2150mm.

Installation Options:

Delivery only.

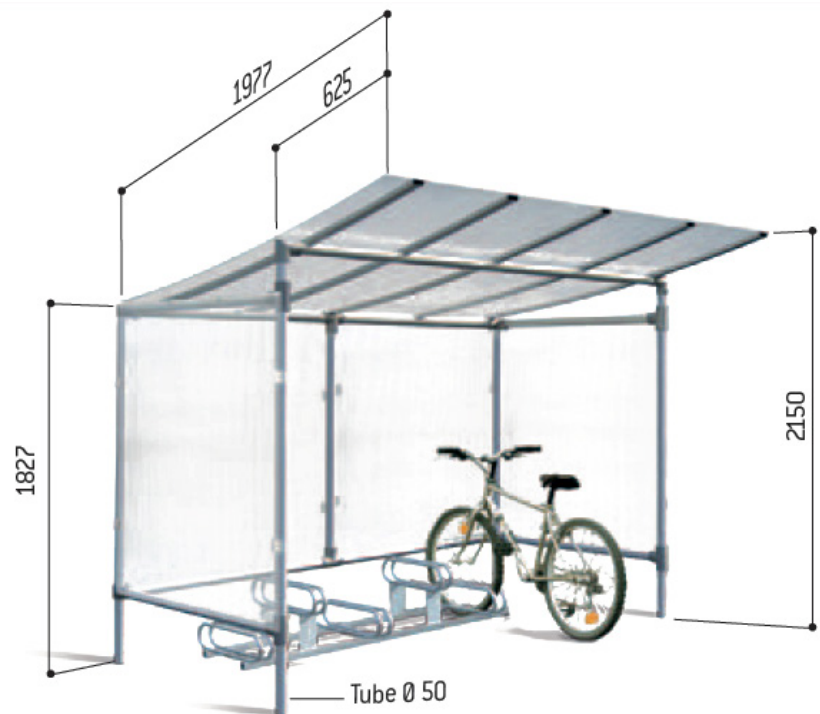

SHELTERS

