

# LD51-700-LW27-MB

0.5	0.27	E(0°) E(C0)	15.2°	1649 746
1.0	0.54	E(0°) E(C0)	15.2°	412 186
1.5	0.82	E(0°) E(C0)	15.2°	183 83
2.0	1.09	E(0°) E(C0)	15.2°	103 47
2.5	1.36	E(0°) E(C0)	15.2°	66 30
3.0	1.63	E(0°) E(C0)	15.2°	46 21

Distance [m]

Cone Diameter [m]


Illuminance [lx]

— C0 - C180 (Half value angle: 30.4°)


# LD51-700-LW27-NB

0.5	0.17	E(0°) E(C0)	9.9°	3677 1774
1.0	0.35	E(0°) E(C0)	9.9°	919 444
1.5	0.52	E(0°) E(C0)	9.9°	409 197
2.0	0.70	E(0°) E(C0)	9.9°	230 111
2.5	0.87	E(0°) E(C0)	9.9°	147 71
3.0	1.05	E(0°) E(C0)	9.9°	102 49
Distance [m]	Cone Diameter [m]	Illuminance [lx]		
 C0 - C180 (Half value angle: 19.8°)				

# LD56-500-LW27-MB

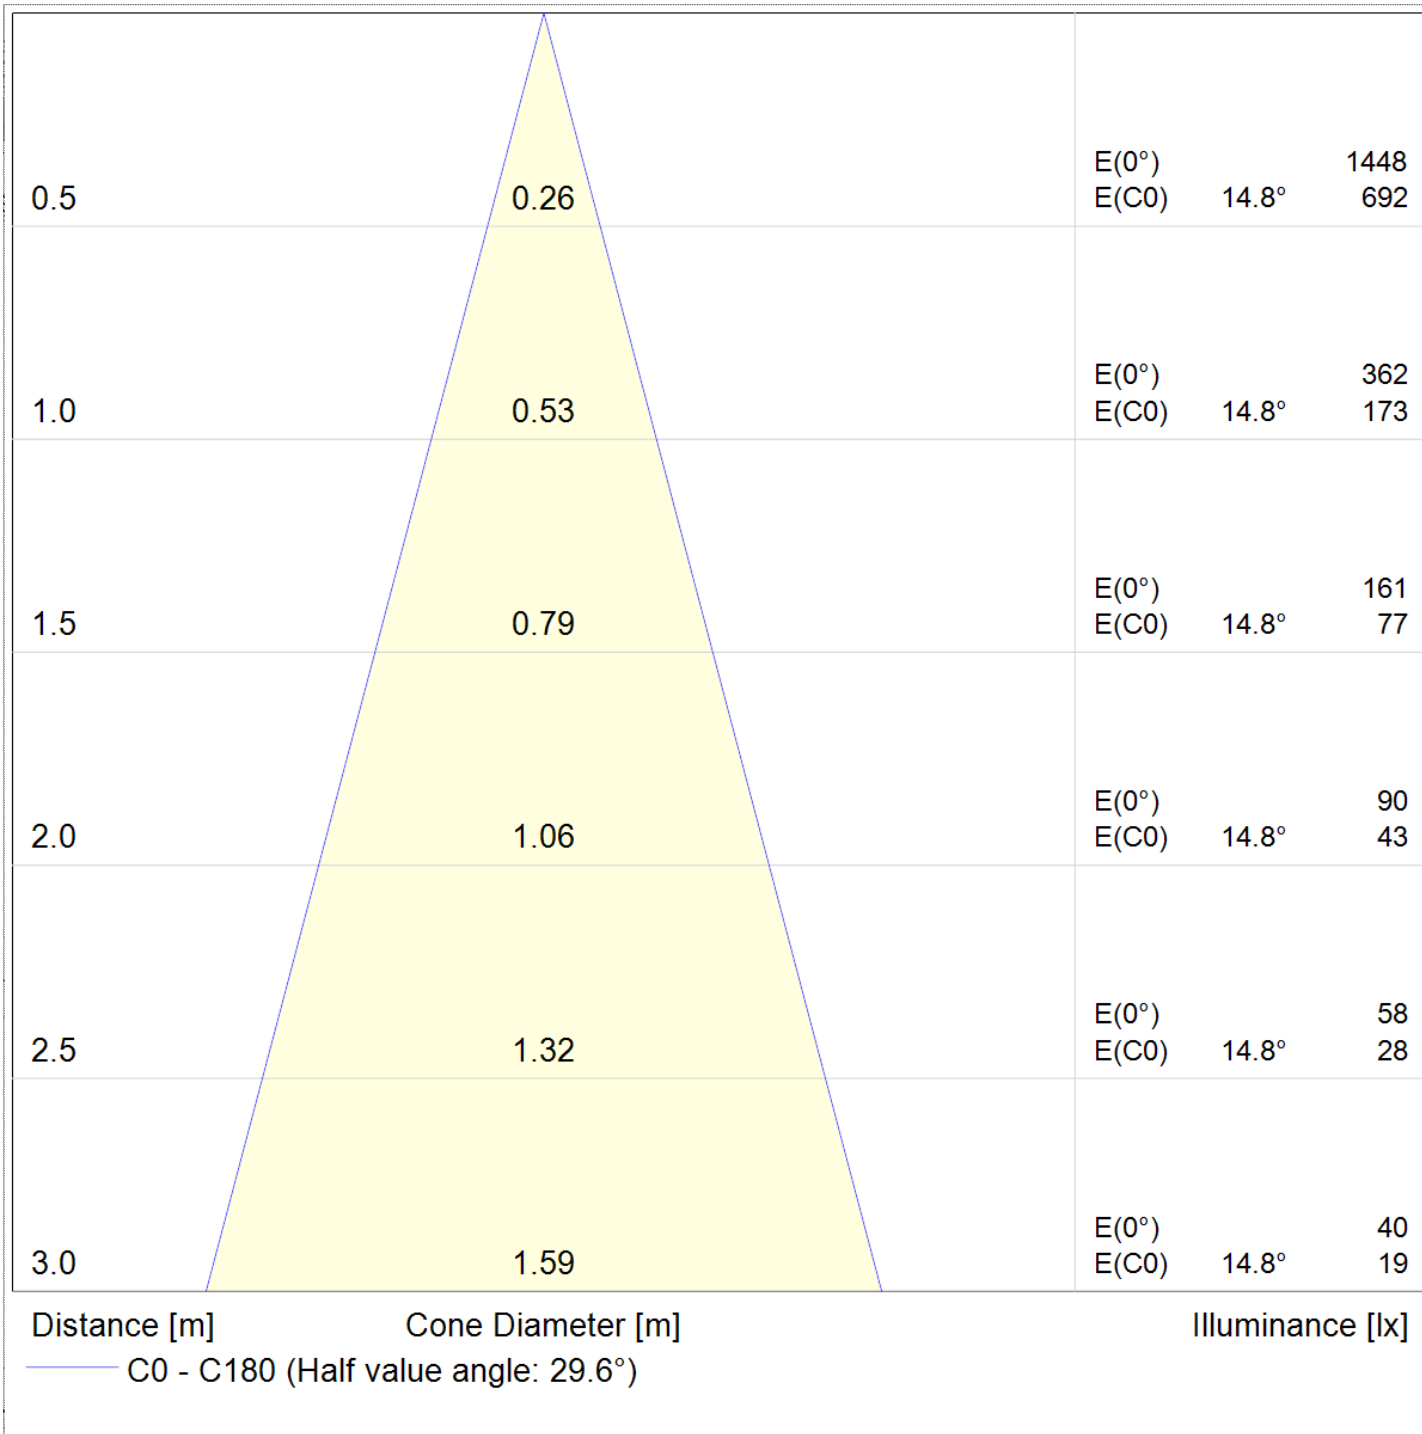

# LD56-700-LW27-MB

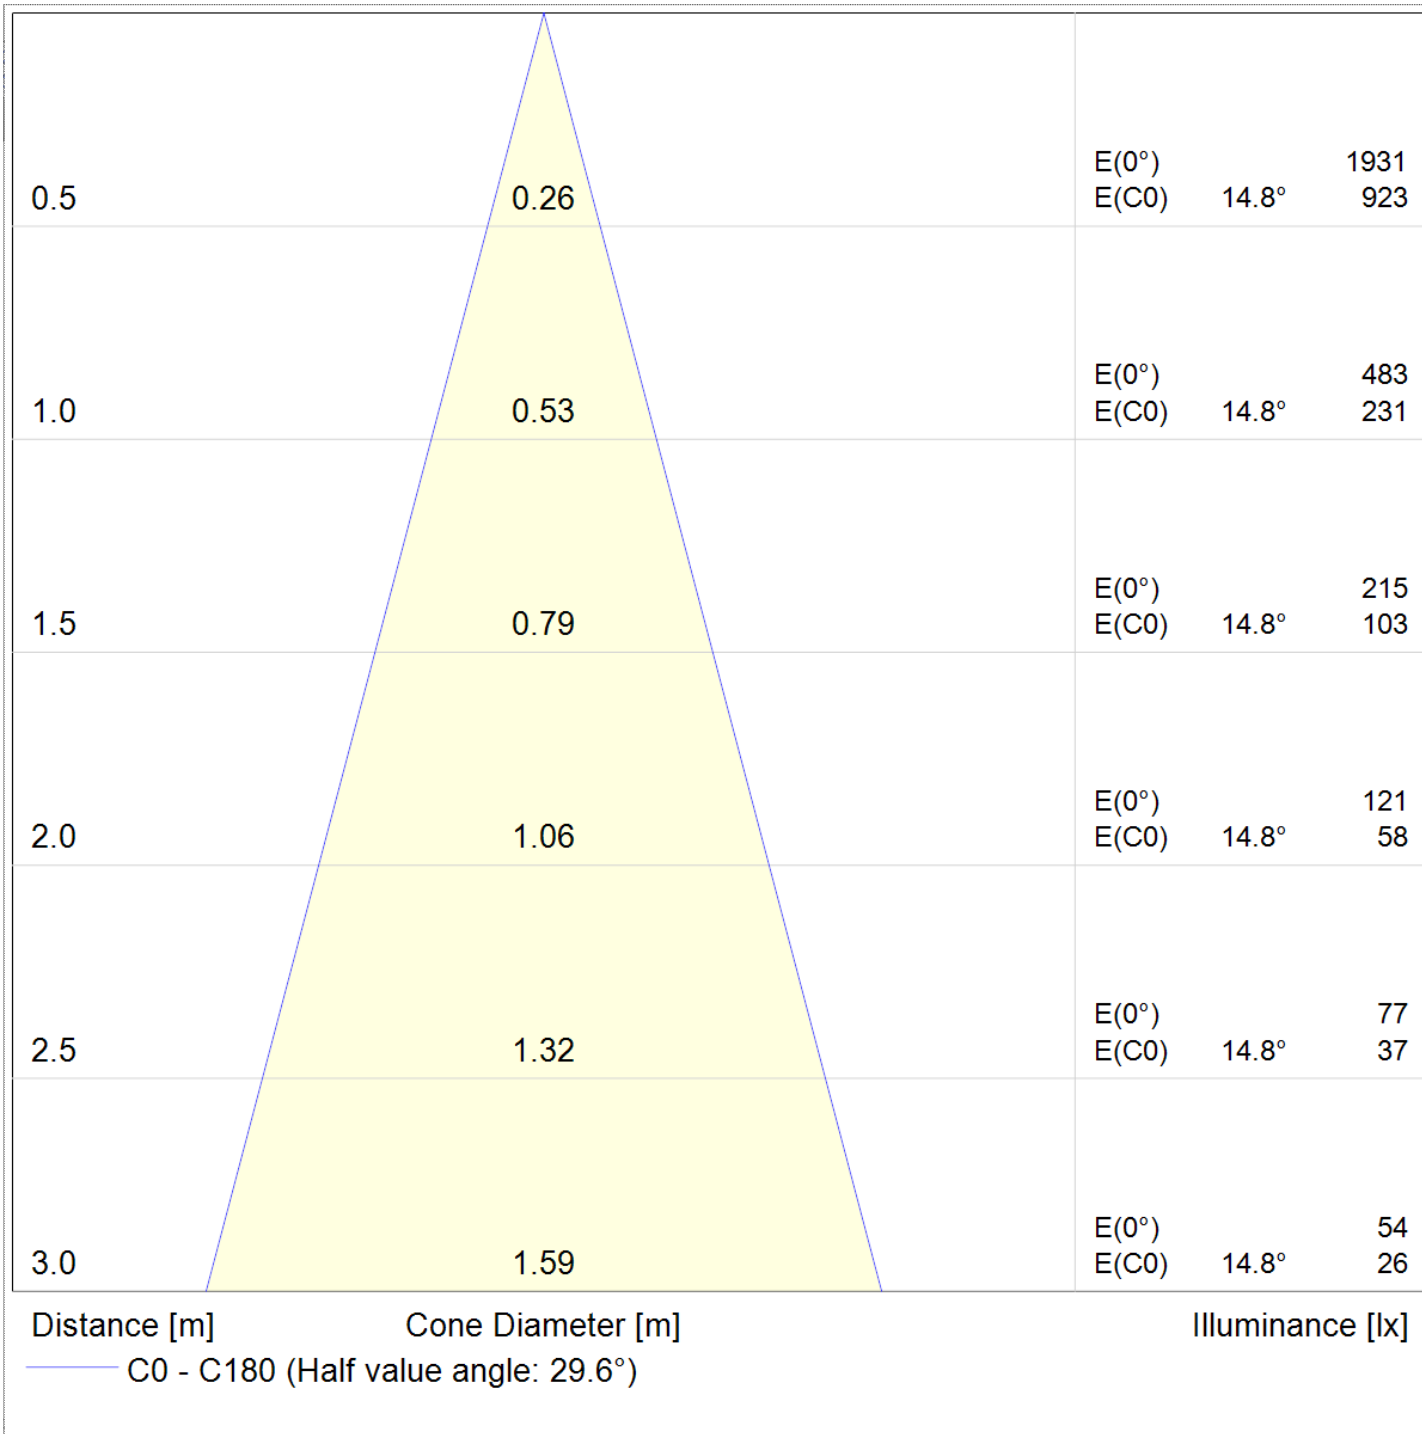

# LD56-700-LW27-NB

0.5	0.14	E(0°) E(C0)	7.9°	4686 2307
1.0	0.28	E(0°) E(C0)	7.9°	1172 577
1.5	0.42	E(0°) E(C0)	7.9°	521 256
2.0	0.56	E(0°) E(C0)	7.9°	293 144
2.5	0.69	E(0°) E(C0)	7.9°	187 92
3.0	0.83	E(0°) E(C0)	7.9°	130 64

Distance [m]	Cone Diameter [m]	Illuminance [lx]

# LD151-500-LW27-MB

0.5	0.18	E(0°) E(C0)	10.0°	9095 4380
1.0	0.35	E(0°) E(C0)	10.0°	2274 1095
1.5	0.53	E(0°) E(C0)	10.0°	1011 487
2.0	0.71	E(0°) E(C0)	10.0°	568 274
2.5	0.88	E(0°) E(C0)	10.0°	364 175
3.0	1.06	E(0°) E(C0)	10.0°	253 122
Distance [m]	Cone Diameter [m]	Illuminance [lx]		
 C0 - C180 (Half value angle: 20.0°)				