


Optigreen System Solution "Lightweight Roof"

Solution 1: 0 - 5° pitch

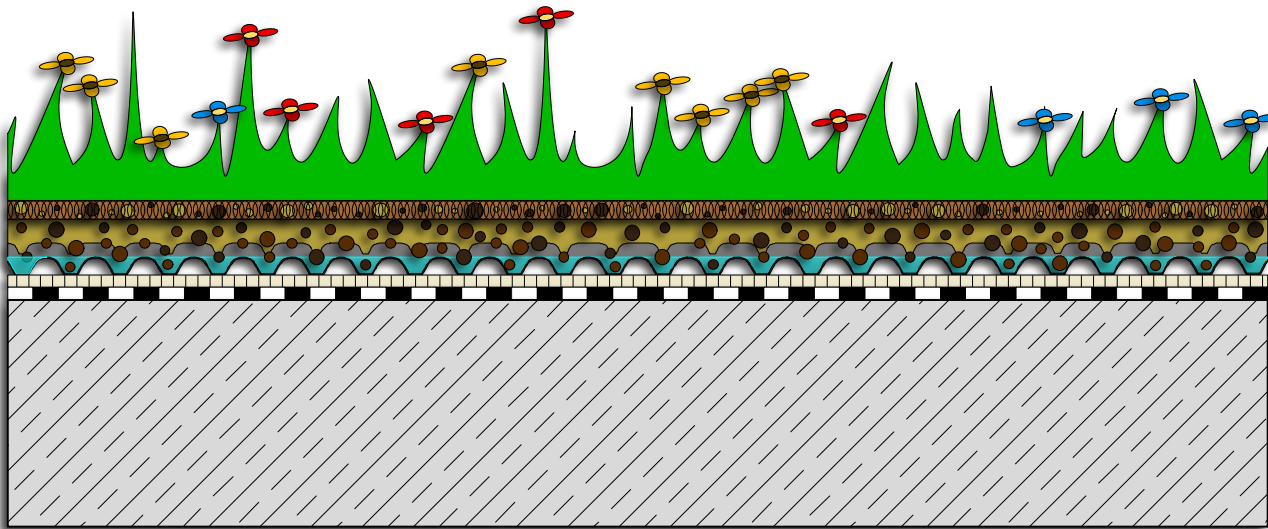

- Optigreen Sedum Mat SM/G
- Optigreen Low Density Substrate L (30 l/m²)
- Drainage and Storage Board FKD 25 (25 mm), filled
- Optigreen Protection and Storage Fleece RMS 300
- Waterproofing membrane (root resistant according to FLL)*
- Suitable substructure*

* According to national regulations



The depicted solution is intended for use with green roof systems. Other construction tradework is simplified in this representation and should be constructed according to current industry standards. Optigreen reserves the right to make changes to its product solutions.							
Approved:	EN		drawn by:	scale:	update:	Rev.:	Detail-No.:
OBU / HVO	O		ob/mh	not to scale	26.02.2018	3	LE1.1000_UgD

Reprinting is only permitted with the prior permission of the editors.
No responsibility for printing errors.
Subject to technical modifications.