



NOTES

- 1 This drawing is to be read in conjunction with the Architects drawings and the project specification. Do not scale off the drawing.
- 2 All steelwork is to be grade S355, shot blasted and painted with 2 coats of zinc phosphate primer or red oxide primer unless noted on drawing as galvalume, or concrete cased. All bolts are to be grade 8.8. All fabrication is to be done in accordance with BS5950.
- 3 All timber is to be C24 grade (unless noted as C16 on the drawing) and seasoned. Paint all cut ends with timber preservative, on site. Plywood must comply with EWC30, Class 3.
- 4 All blockwork is to be 20.5 N/mm² h 1:1:6 mortar unless used as an external facing brick. All blockwork is to be 7.0 N/mm² h 1:1:6 mortar. All unless noted otherwise on drawing.
- 5 All concrete (except binding concrete) is to be minimum 30 N/mm² with 20 diameter aggregate and is to be mechanically vibrated, when placed. All concrete work must comply with BS 8110.
- 6 The Contractor must provide all details of their proposed construction works, before commencing the structural works.

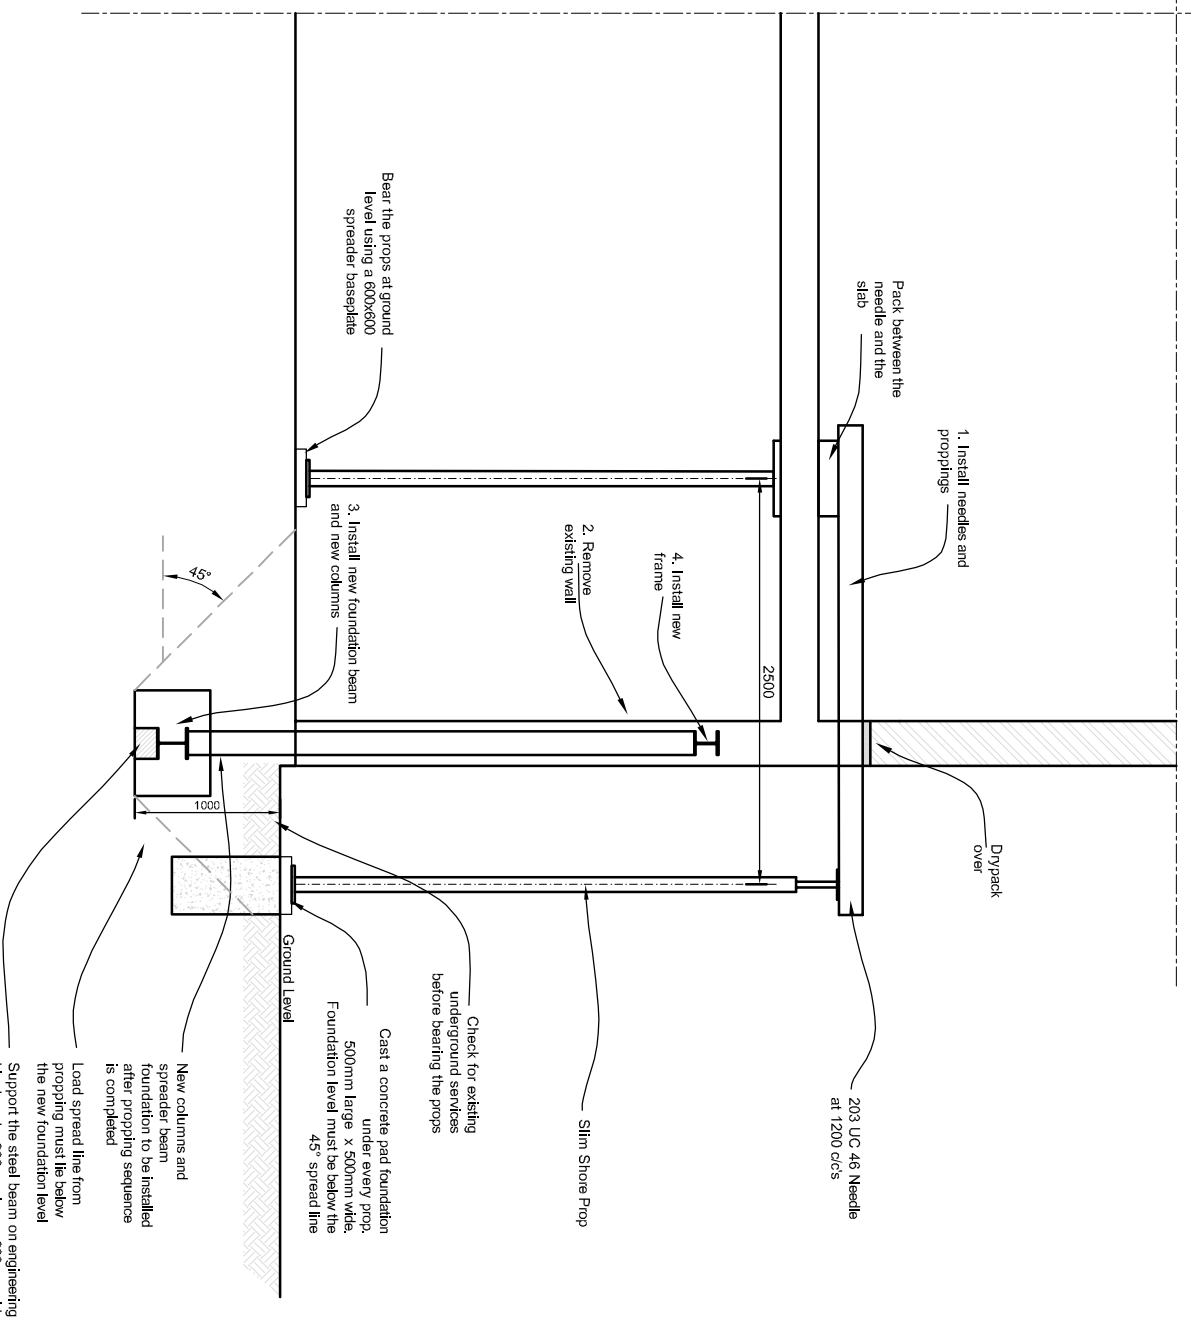

Propping of existing slabs/External wall Detail

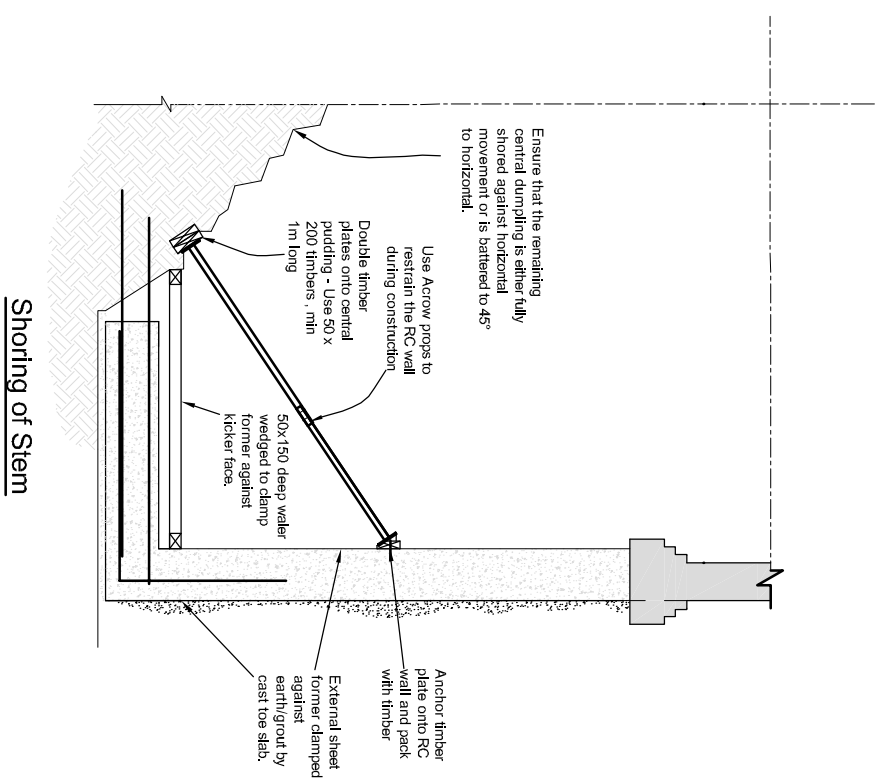

Typical Underpin Shoring Section Detail

COOPER ASSOCIATES
 CONSULTING CIVIL AND STRUCTURAL ENGINEERS
 6 Banksway Place
 LONDON E01 1TH
 Tel: 020 7606 0182
 info@cooperassociates.com
 www.cooperassociates.com

PROJECT
Atelier Brown
 Flat 1 9-10 Regent Square
 London, WC1H 8HZ

DRAWING TITLE
Typical Temporary Works Details

DATE: 15/06/11
 DRAWN: MJC
 CHECKED: MJC
 SCALE: 1:100
 PROJECT NO: CA5591/T01