



Window from outside
with Secondary glazing

Traditional sash with
weights and pulleys

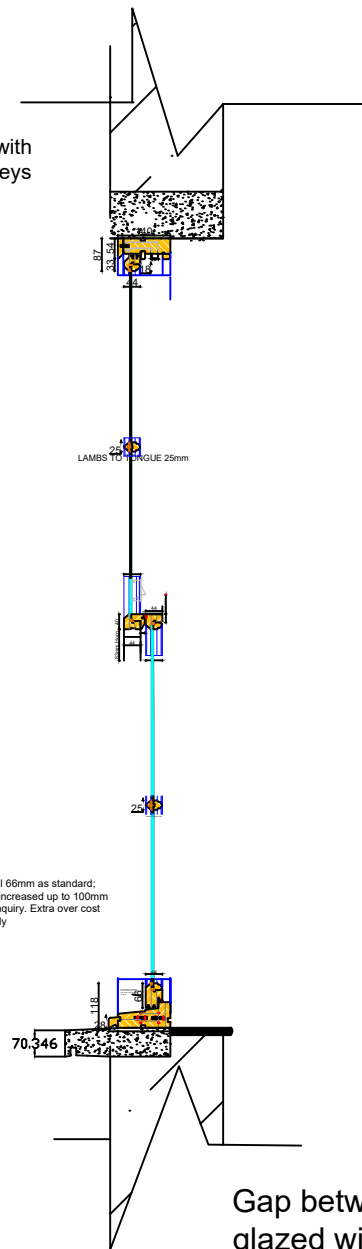


Window Section A-A


Gap between single
glazed window and
secondray glazing
minimum of 35mm.

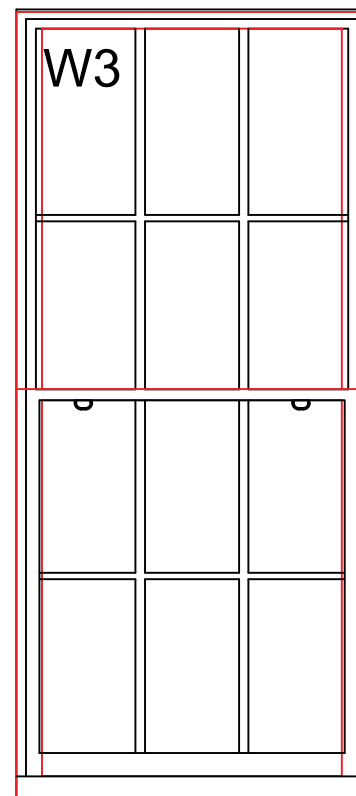

Window from inside
with Secondary glazing


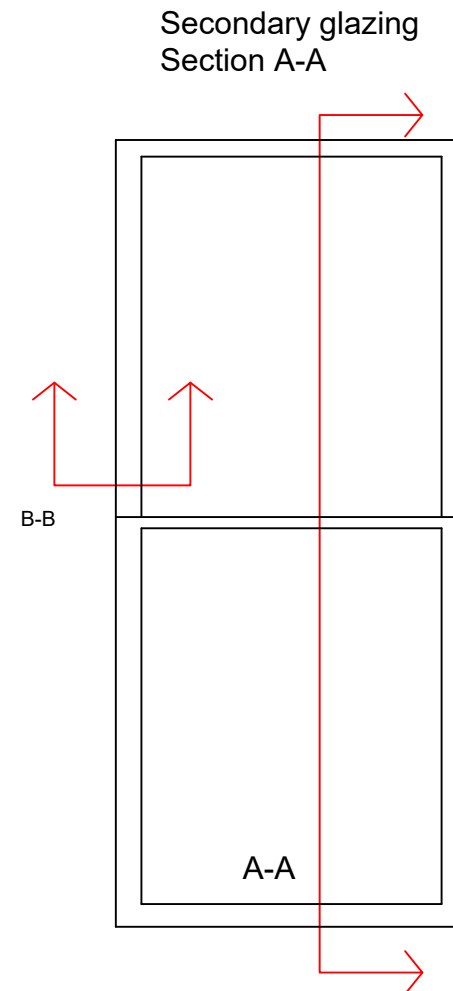


Secondary glazing
Section A-A



Section
B-B

Secondary glazing
Section A-A



walke
CONSTRUCTION CONSULTANT

EMPLOYER'S AGENTS & PROJECT MANAGER

Unit A Court House 11a High Street Barn

LONDON EN5 5UJ

TEL: 020 8446 5537

E-MAIL: INFO@WALKERMANAGEMENT.CO.UK

TITLE
Secondary glazing detail section

PROJECT
47 Georgiana Street

CLIENT
CIRCLE 33 HOUSING / KIER

SCALE: AS IDENTIFIED

CAD FILE: -

DATE: 28.08.18

DRAWN BY: WM

CHECKED:

PROJECT NO.
3853

DRAWING NO.
3853/WM/08

REVISION
0

Existing single glazed timber window to
be exactly same to keep the heritage
look of the building and new secondary
glazing to be fitted for thermal proposes
to stop condensation and noises