



*Walkway tiled area to be replaced*

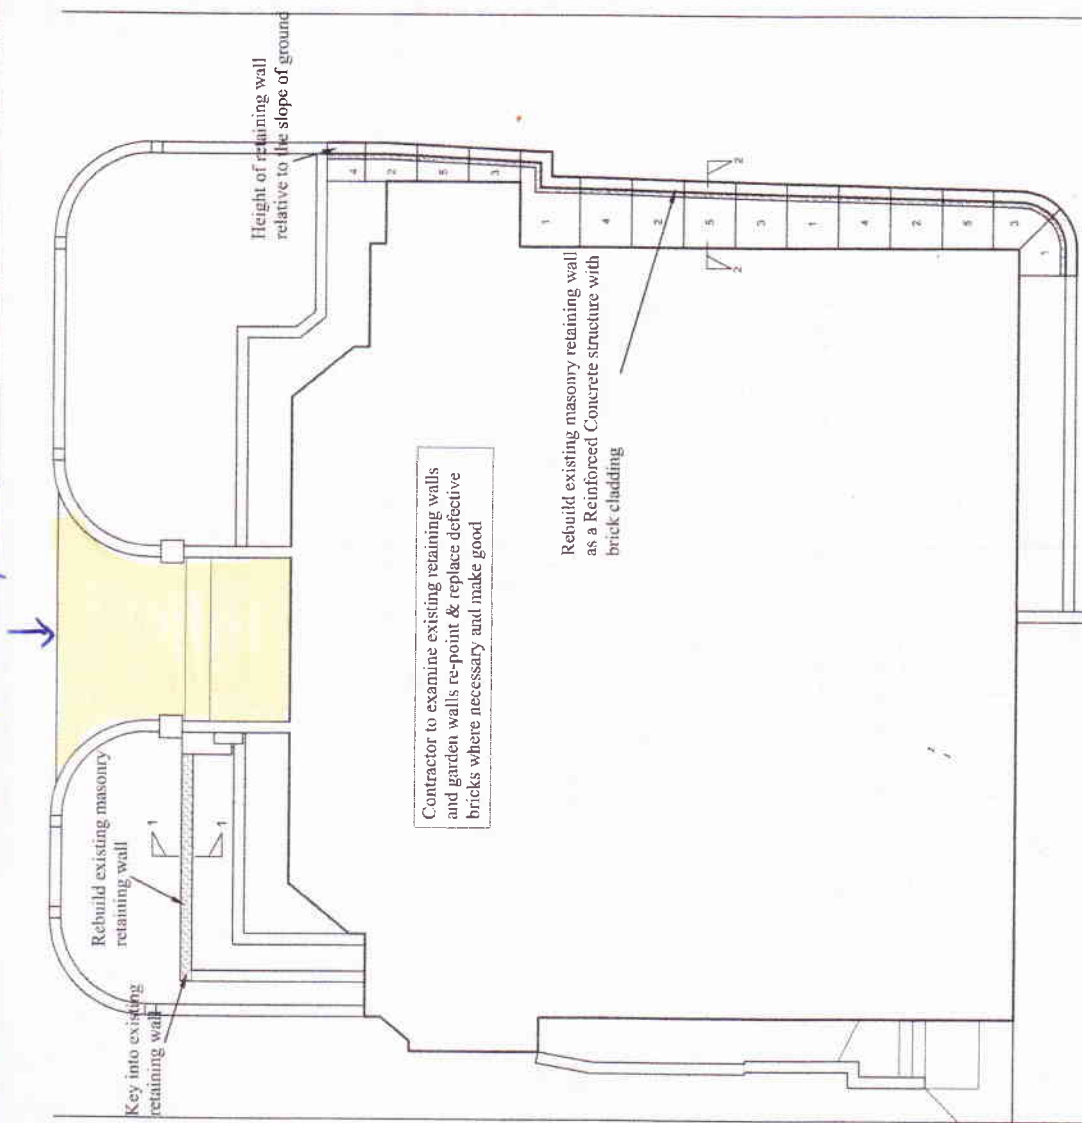

SUGGESTIVE CONSTRUCTION SEQUENCE

1. Divide length of wall to be constructed into bays of maximum length 1000. Construct bays in the order 1 3 2 4 1 3 5 ... so as not to have to work on bays adjacent to bays just completed.
2. Place H12 x 600 mm bars into each unconcreted side for continuity between bays. Concrete must be compacted with a 50 mm poker vibrator. Wait a minimum of 24 hours before working on adjacent bays.

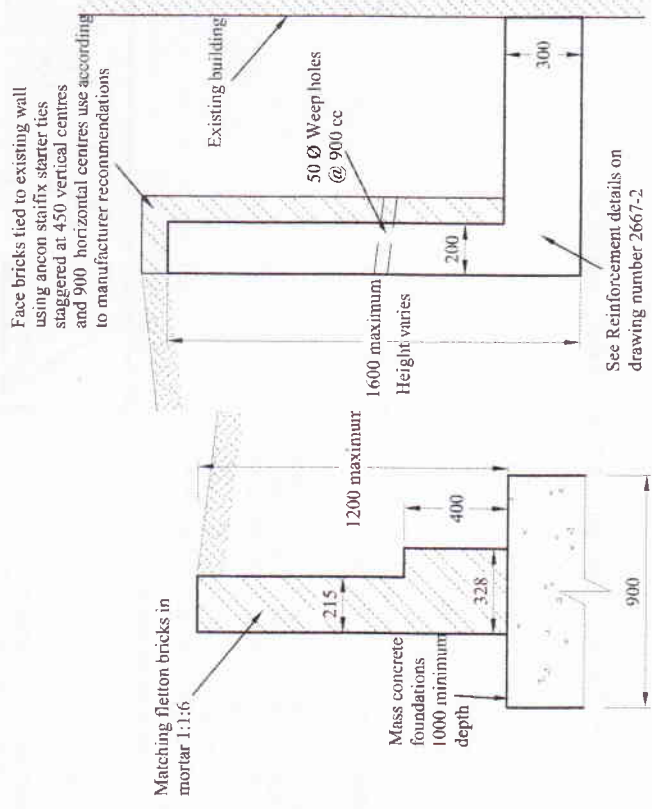

Rev	Date	By	Details

**ALECK ASSOCIATES LTD**

707 High Road, North Finchley, London N12 0BT  
 Tel: 020 8446 6765 Fax: 020 8446 6328  
 Drawing@aleckassociates.co.uk

SITE		1 Wedderburn Road, London NW3 5QR	
PROJECT		Retaining walls	
TITLE		Plan showing retaining walls and sections	
SCALE ON A3	1 to 20/100	BY	M.W.
DATE	27.10.2014	REV	
DRWG No.	2667-1		

ENGINEER'S CONSTRUCTION NOTES

**GENERAL**  
 To be read in conjunction with all Engineers' drawings and method statement and with all architectural and services drawings and specifications. Seek instructions in the event of any conflict.  
 The structural designs shown are to be set out to suit the conditions of the site and existing works if any and the Architect's proposals.  
 Do not scale - please ask for information.  
 Some notes may not apply.

Plan showing retaining walls

SCALE 1:100