


Battlestar

Battlestar Uplight 45° 350mA 3W

Aluminium 3000K Warm White

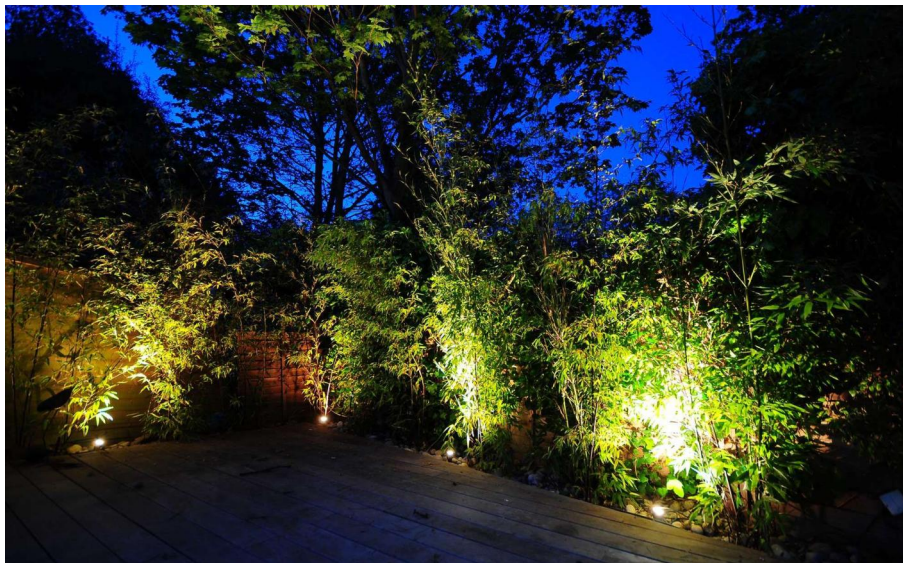

D4000 FROST IP65

Colour: Aluminium

Light Colour: 3000K Warm White

General

Colour	Stainless Steel
Construction	Aluminium / Glass
Dimmable	Yes
Drive-Over Limits	2000kg 25km/hr
IP Rating	IP65
LED Type	CREE M3

Dimensions

Cable Length	1000mm
Cut Out	75mm (Diameter)
Depth	125mm
Diameter	88mm

Electrical

Amperage	350mA
Maximum Wattage	3W
Requires Driver	Yes

Light Characteristics

Beam Angle	45°
Colour Temperature	3000K Warm White
Lumens	240 lm
Lumens Per Watt	80 lm/W

The **Battlestar Uplight 45° 350mA** is a recessed uplight that can be used in floors and walls. The Battlestar Uplight is rated IP65, this allows it to be fitted into wet areas, for example outside on decking. Constructed and finished in aluminium with frosted glass.

Please note; this product requires a 350mA driver and must be wired in series.

LED Driver Options

- LED Driver (Switching) - Use this driver for on/off control. Cannot be used for dimming.
- LED Driver (Dimming) - For use with nearly all domestic dimming lighting. Most resistive dimmers have a minimum load of 60W, therefore ensure that if this not met, a dummy load is added to the circuit, such as a mains voltage halogen fitting.
- LED Driver (1-10V) - For use with 1-10V dimmer modules or 1-10V control systems. This type of dimming does not have a minimum load.
- Wise Scene/Dimming (Dimming + Wireless) - This controller can be used for both switching and dimming. Additionally, this unit can communicate via radio and external push buttons, allowing you to wirelessly control your fitting. Note that an additional 24V LED driver is required to power the *Wise Scene/Dimming Receiver*.

Battlestar

Battlestar Uplight 45° 350mA 3W

Aluminium 3000K Warm White

