V I V E N D I A R C H I T E C T S LTD

REFUSE AND RECYCLING METHODS



Container Dimensions and Specifications

Container	Dimensions Width Depth Height		Equivalent in black bags	
140 litre wheeled bin*	Width	Deptil	neight	black bays
	555mm	500mm	1100mm	2
360 litre wheeled bin*				
	880mm	580mm	1100mm	3 - 4
660 litre euro bin				
	1205mm	775mm	1340mm	7 - 8
1100 litre euro bin				
0-3-0	1205mm	980mm	1340mm	14 - 15

*Dependant on service

We <u>employ cookies</u> to provide you with better performance and offer you a better online experience. If you continue without changing your settings, we presume that you consent to our use of these cookies.

οκ

BLANCO SELECT 60/2


Pros



The best SELECT by BLANCO: waste system and cabinet organisation of the new generation.

- · Modern, harmonious and functional design
- Integrated construction prevents dirt
- · All parts are easy to clean
- High quality system cover that can simply be pulled out
- · Unbeatably quick and easy to install
- Optional: Practical accessories such as the SELECT CLIP bin liner holder, the BLANCO SELECT AutoMove electric opening system or the BLANCO MOVEX foot pedal for BLANCO SELECT and all pull-out fronts
- Functionally designed bins and visually integrated handles

Details

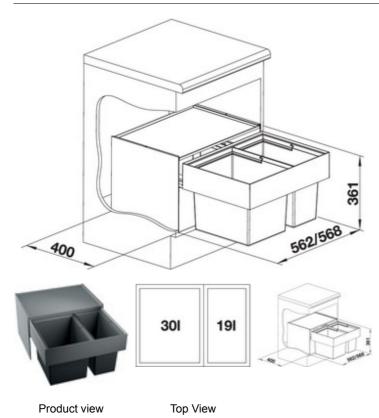

Item No.

518723 Front door and side walls

Scope of supply

30 I and 19 I bins

Design tips

Installation height 361 mm, installation depth 400 mm, required inside dimension of cabinet 450 mm.

• Door fronts must not have hinges or holes. Take position of handle into account.

• Can also be installed in cabinets with panelled doors with 40 mm frame.

• Consider the installation height of the waste system, installation depth of the sink and the resultant minimum measure of the cabinet right from the planning.

• Minimum recommended plinth height for the installation of MOVEX: 100 mm.




ECO2 Food Waste Disposers

FWD-050SS



Efficient and reliable Supreme grinding efficiency Silent DCmotor Hygienic & convenient Warranty 5-Year in-home service

Knock-out for dishwasher drain



Measurements in Millimeters

A : 335	B : 205
C : 141	D : 175
E:75	F : 165



Features

- 1/2 Horsepower with high-speed permanent magnet ٠ motor 5500 rpm
- Fast grinding technology •
- Corrosion proof stainless steel •
- Manual reset for overload protection •
- Handy wall switch operation •
- Easy and convenient installation
- Trendy and unique gun metal color •

Specifications

- Motor Speed : 5500 rpm •
- Horsepower: 1/2 HP •
- Voltage : 220-240 V •
- Frequency: 50 Hz ٠
- Current: 2.6 A •
 - Type of feed : Continuous •
 - Motor type : Permanent magnet DC motor •
 - Sound shell: Yes •
 - Overload protection : Manual reset • •
 - Individual shipping weight : 5.5 kg

Materials

- Sink flange : Stainless steel •
- Hopper : Glass filled nylon •
- Swivel impeller : Stainless steel • •
- Grind ring : Stainless steel .
- Turntable : Stainless steel

Optional accessories

- Lock Mount •
- Sink Baffle •
- Stopper •
- Flange •
- Plumbing Kit •



The information above is for reference only, detailed specification is subject to final confirmation



Evolution 100 Food Waste Disposer

The Evolution 100 food waste disposal unit is more powerful and quieter than our standard M-Series range. Kitchen convenience is guaranteed with the 2-stage grind technology, .75 hp motor, auto reverse grind system, 5 year warranty and much more

Features



Quieter



Stainless

Steel

Stopper

ter



Quick-Lock™ Mounting



Powerful Induction Motor



Environmentally Responsible







PRODUCT SPEC SHEET

Evolution 100 Food Waste Disposer


Specifications

- Continuous Feed
- Built-In Switch
- Single Phase Motor
- Auto-Reverse Grind System
- Time Rating: Intermittent
- Permanently Lubricated Upper & Lower Bearings
- Shipping Weight (Approx): 8.8 kg
- Overall Height: 312mm
- 2-Stage Grind Technology
- Grind Chamber
 Capacity: 1005ml
- Motor Protection: Manual Reset Overload
- Average Water Usage: Approximately 5L per Person Per Day
- Drain Connection: 1-1/2" (3.81cm)
- Average Electrical Usage: 2-3 KWH per Annum
- Dishwasher Drain Connection

InSinkErator Suite 10, Building 6 Hatters Lane Croxley Green Business Park Watford, Herts WD18 8YH United Kingdom

Sales tel: 01923 297 880 Service tel: 0800 389 3715 www.insinkeratorsc.co.uk



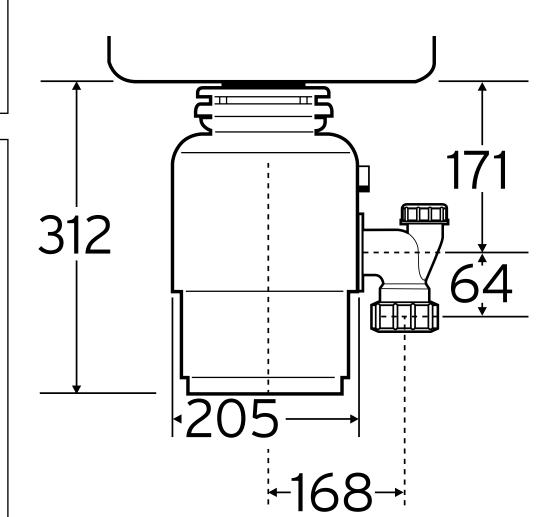

Volts/Hz	НР	RPM	Average Load
120V, 60Hz	.75	1725	8.1 A
220-240V, 50 Hz	.70	1425	380 W
220-240V, 60 Hz	.70	1725	380 W

InSinkErator Emerson Electric Co. 4700 21st Street Racine, WI 53406-5093 USA Sales/Service tel: +1 262-554-5432 www.insinkerator.com/worldmap.html

Dimensions (mm)

