





SECTION AA



SECTION BB

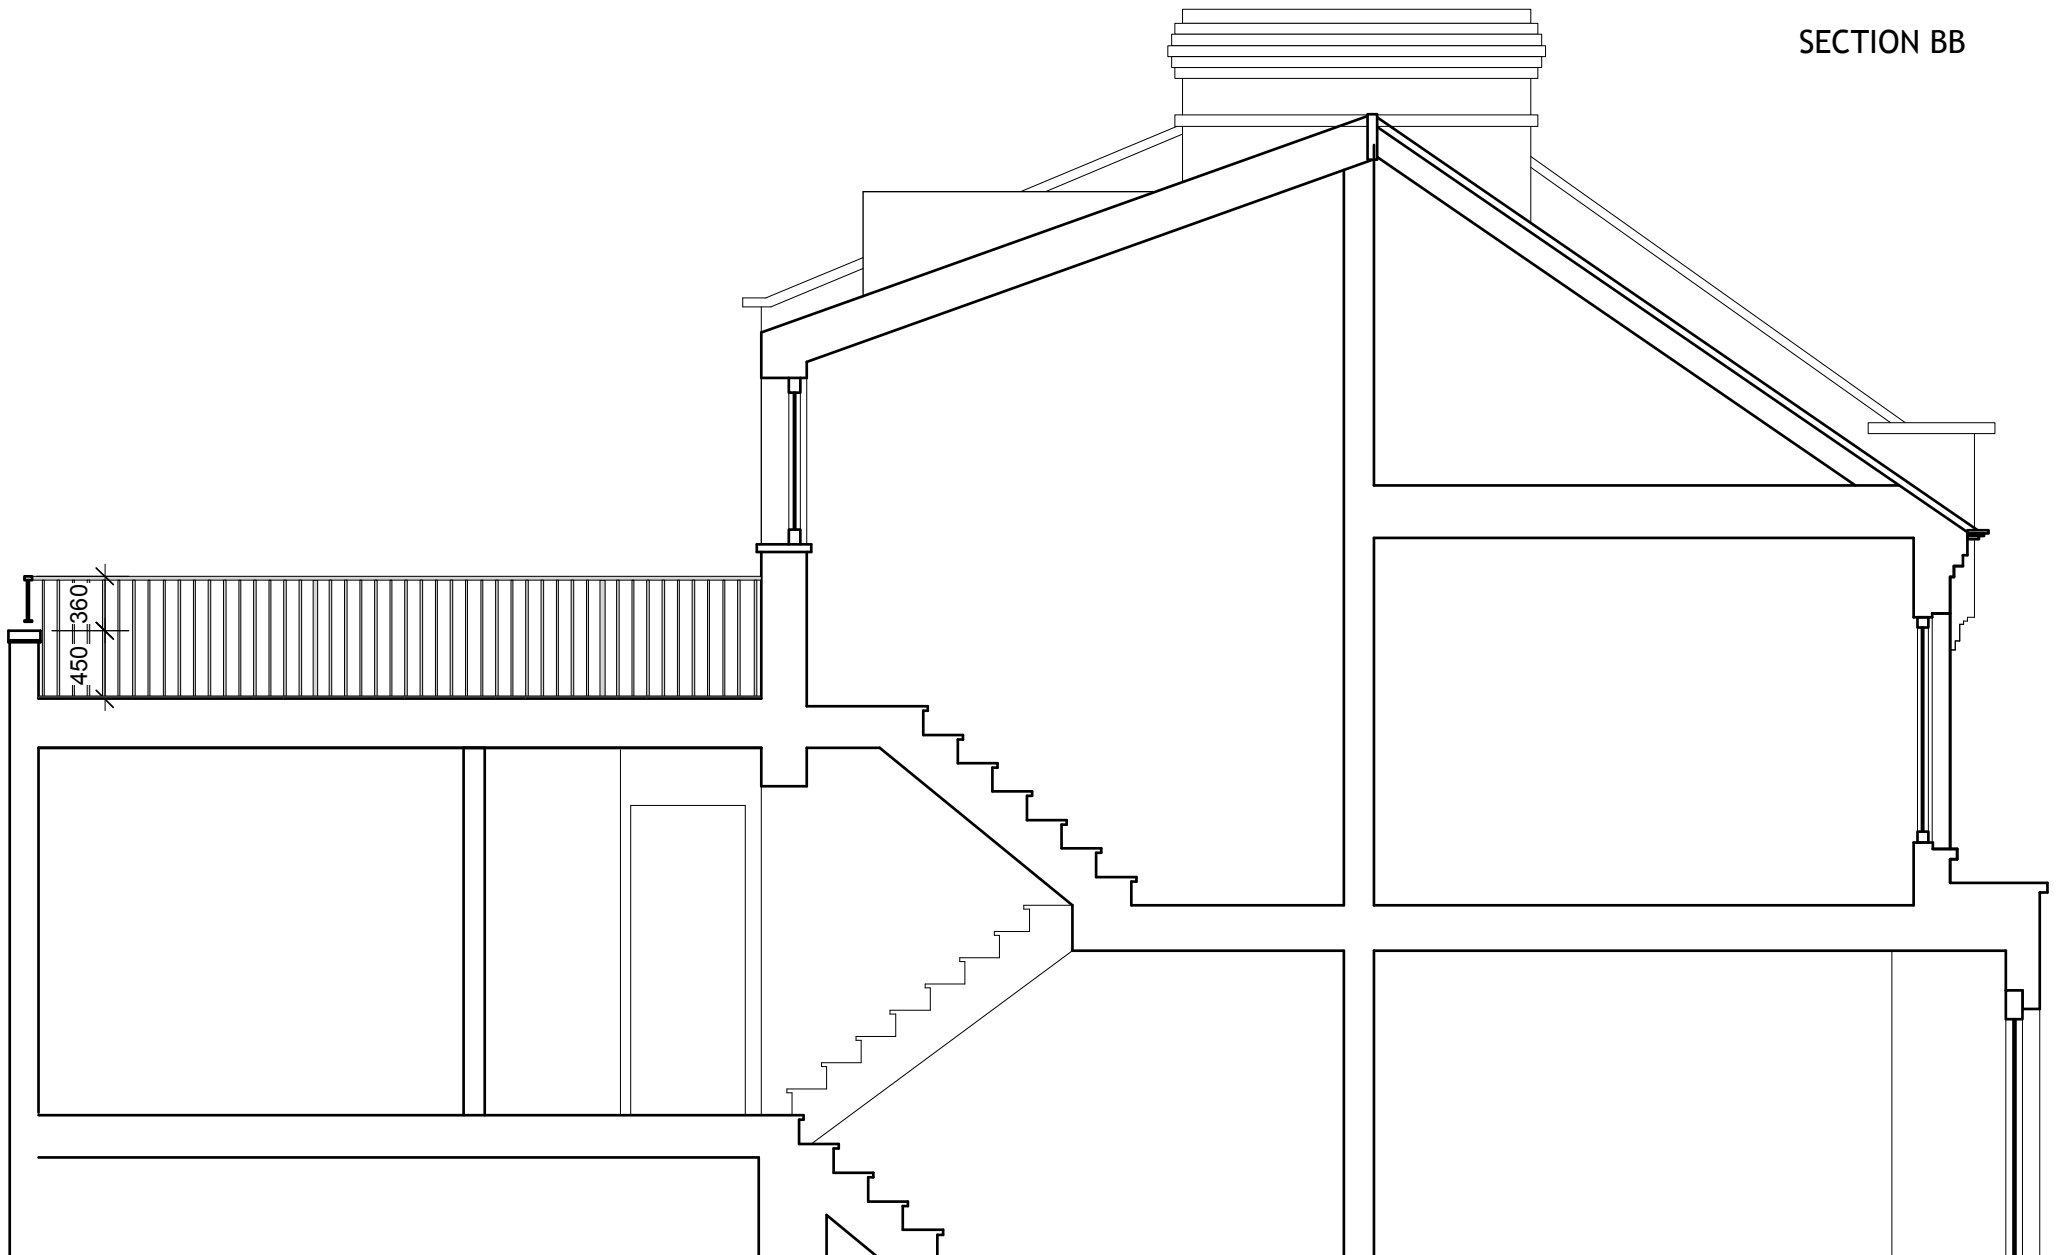

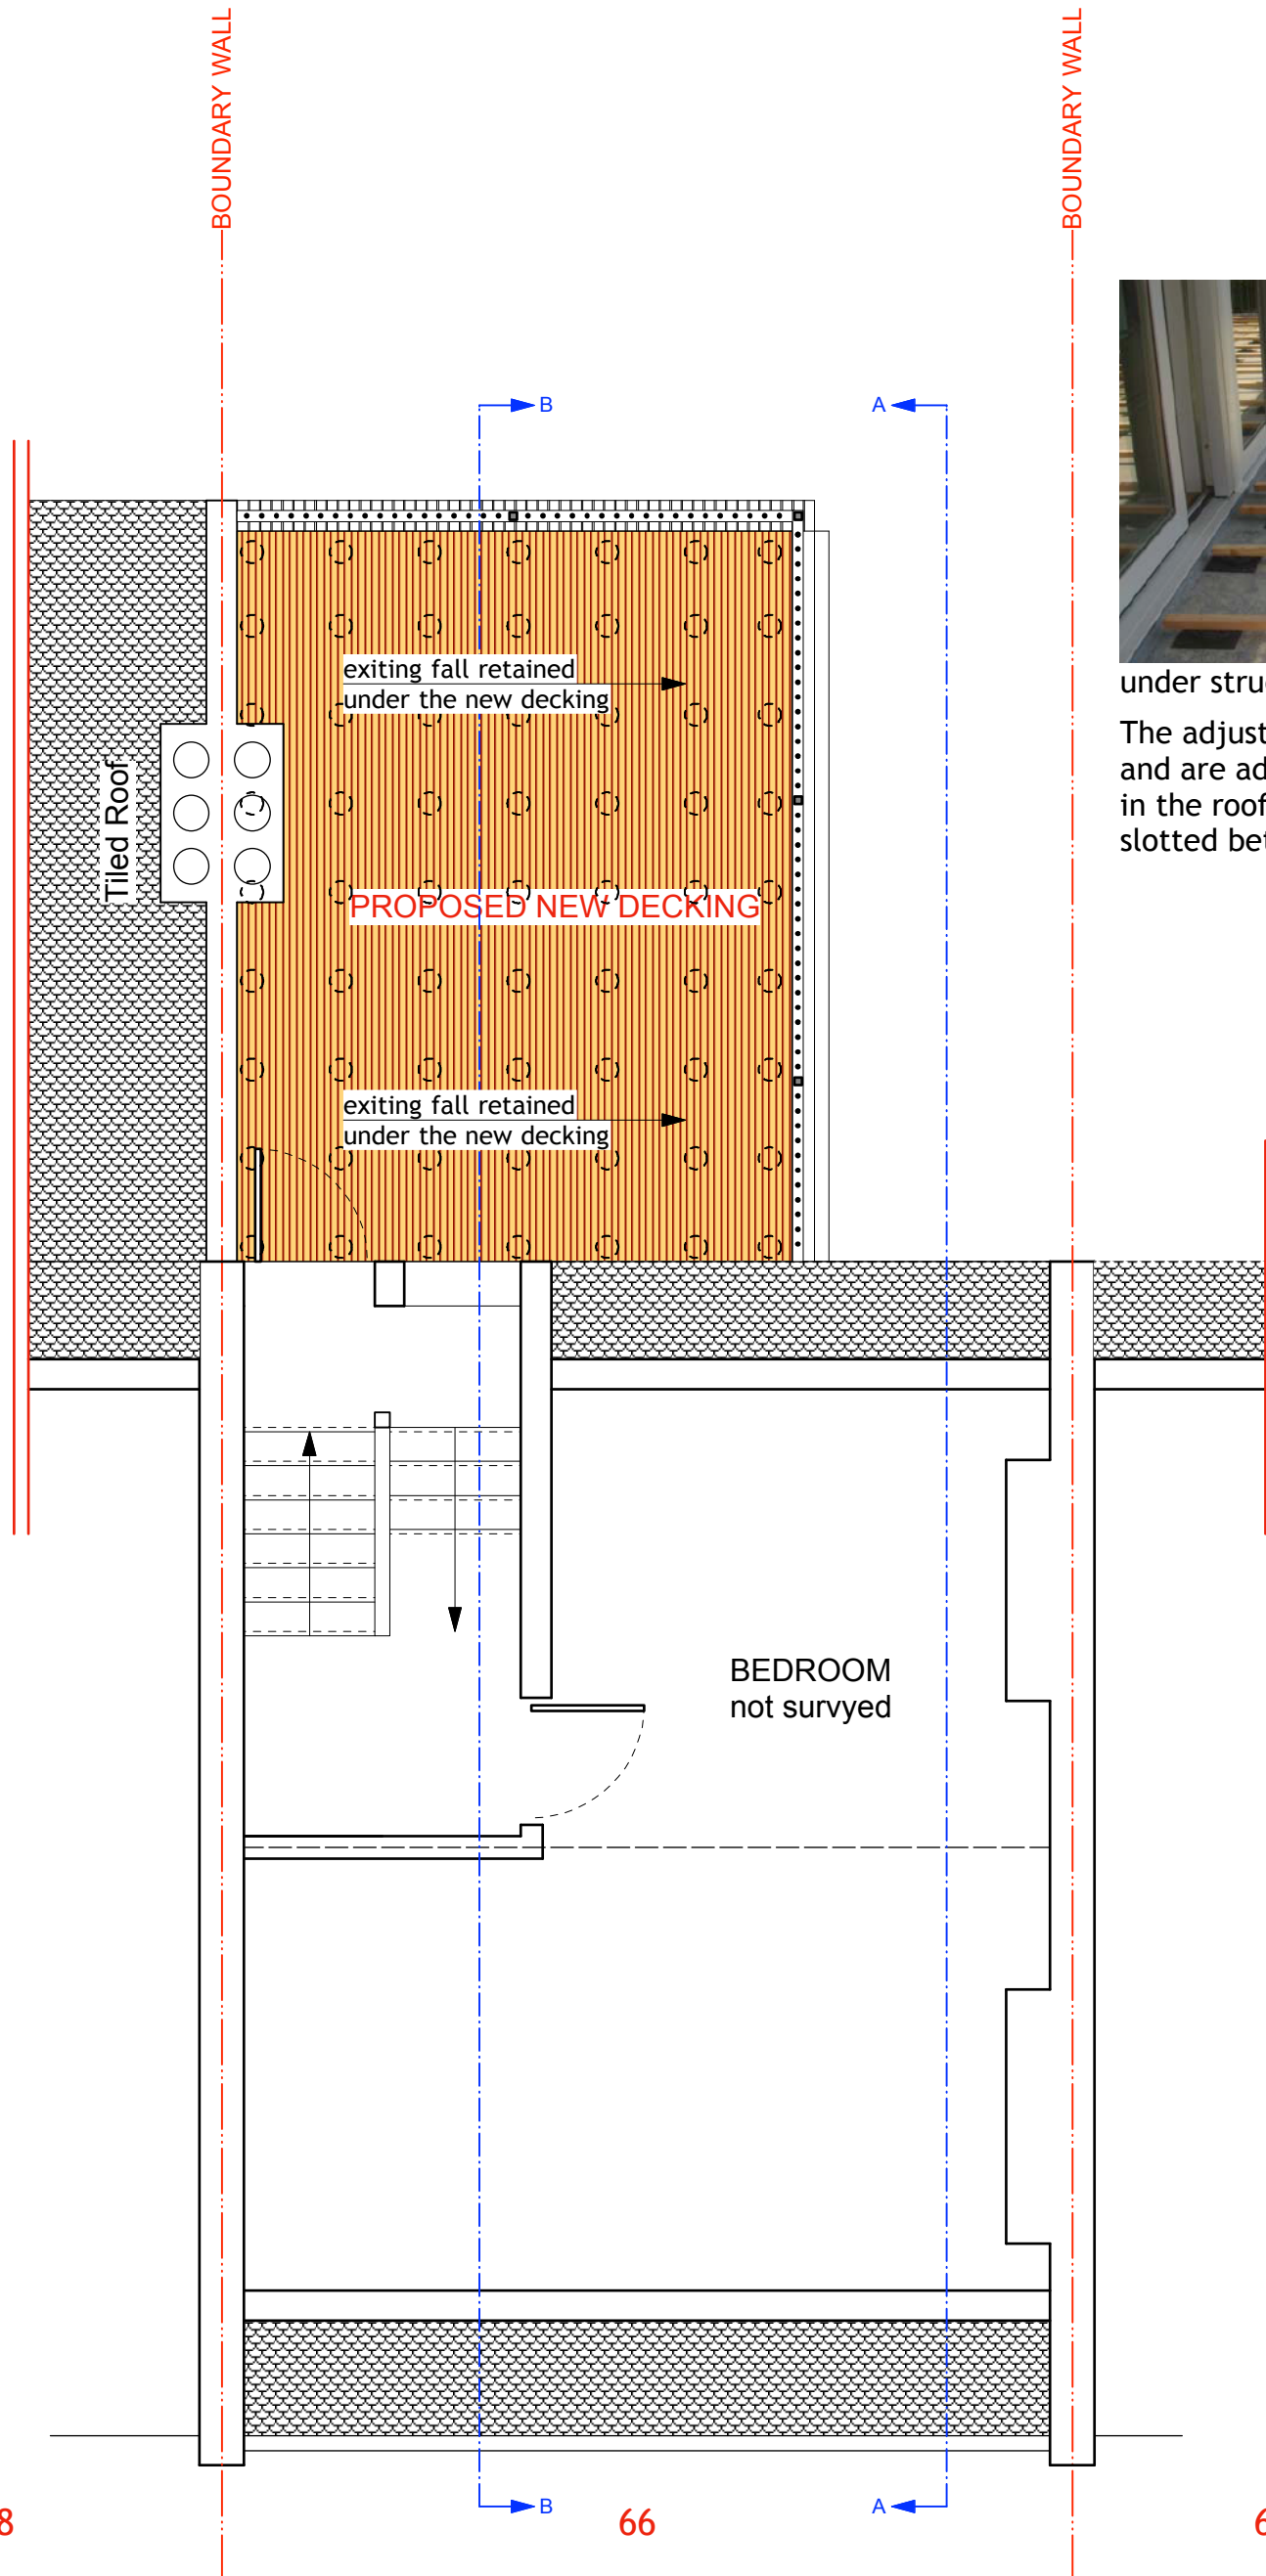

under structure for wood decking

The adjustable supports are placed 600mm apart and are adjusted to accommodate the existing fall in the roof deck, and the joist bearers are simply slotted between the joist holders, placed 60mm apart





68

66


64



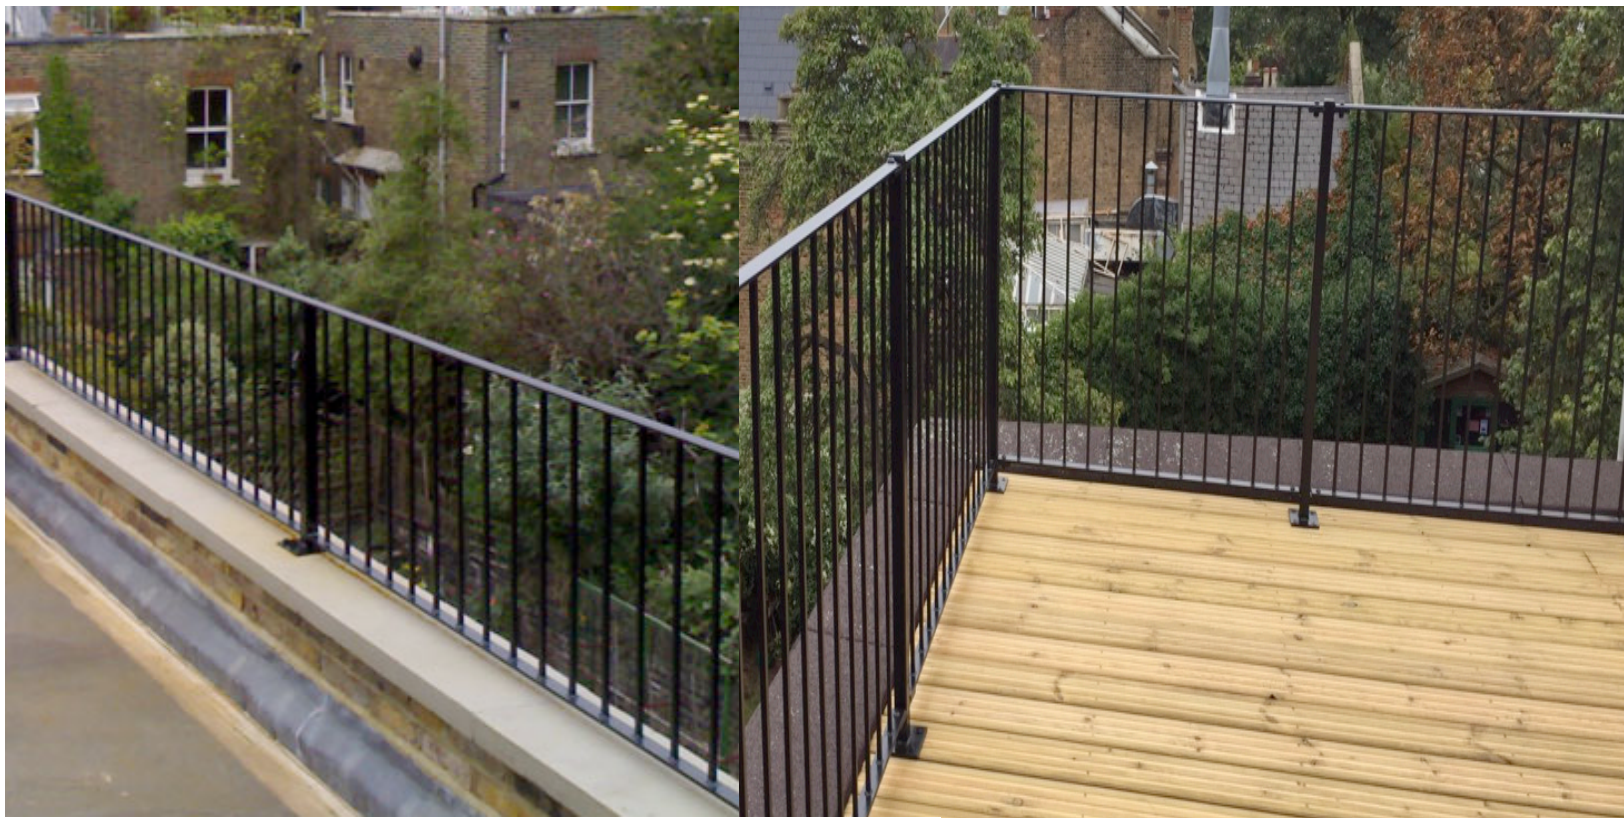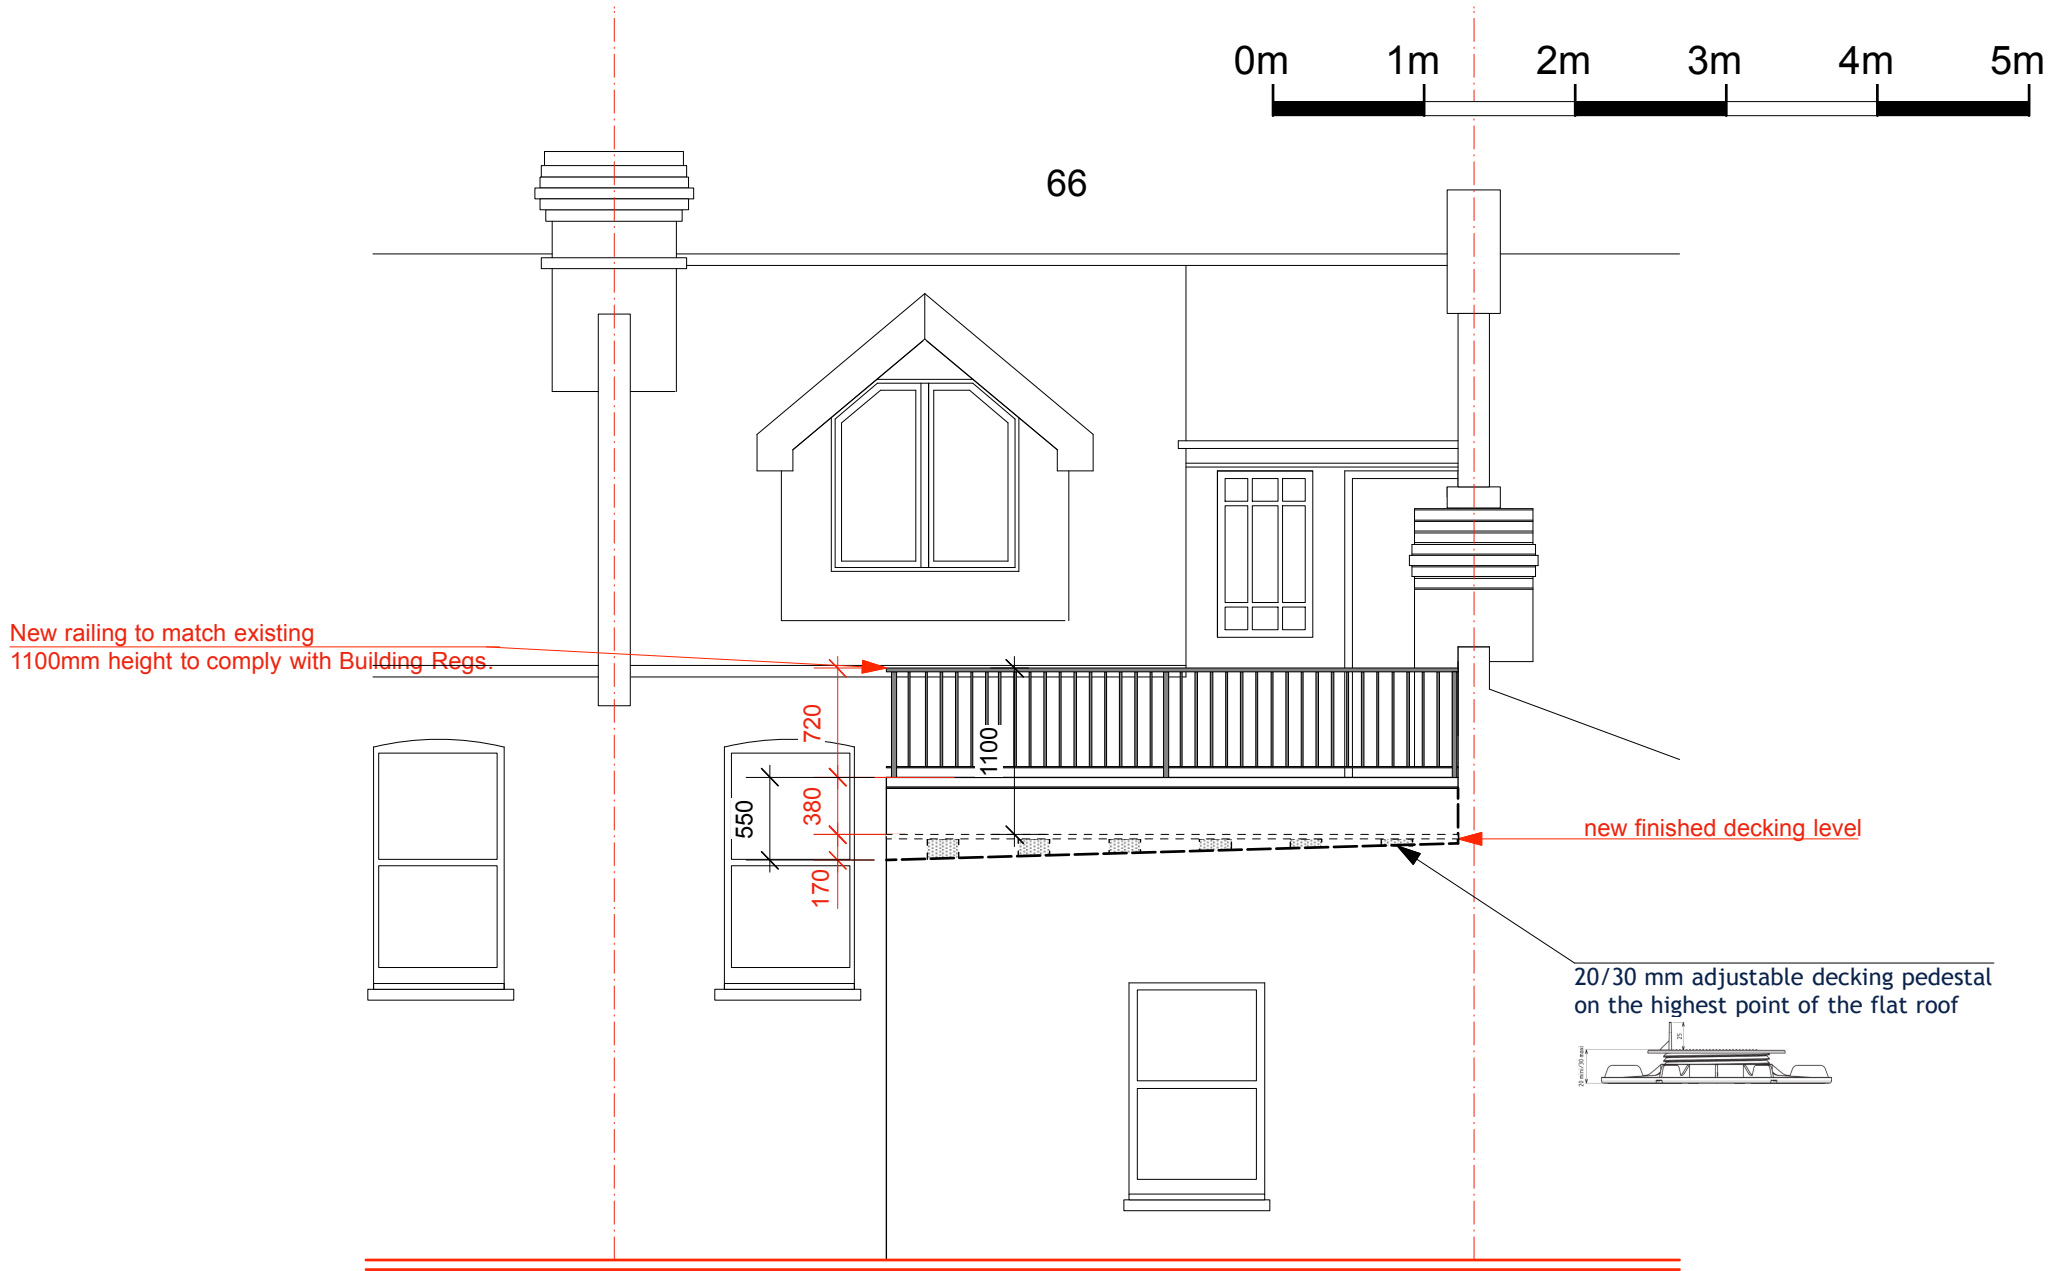



SECTION AA

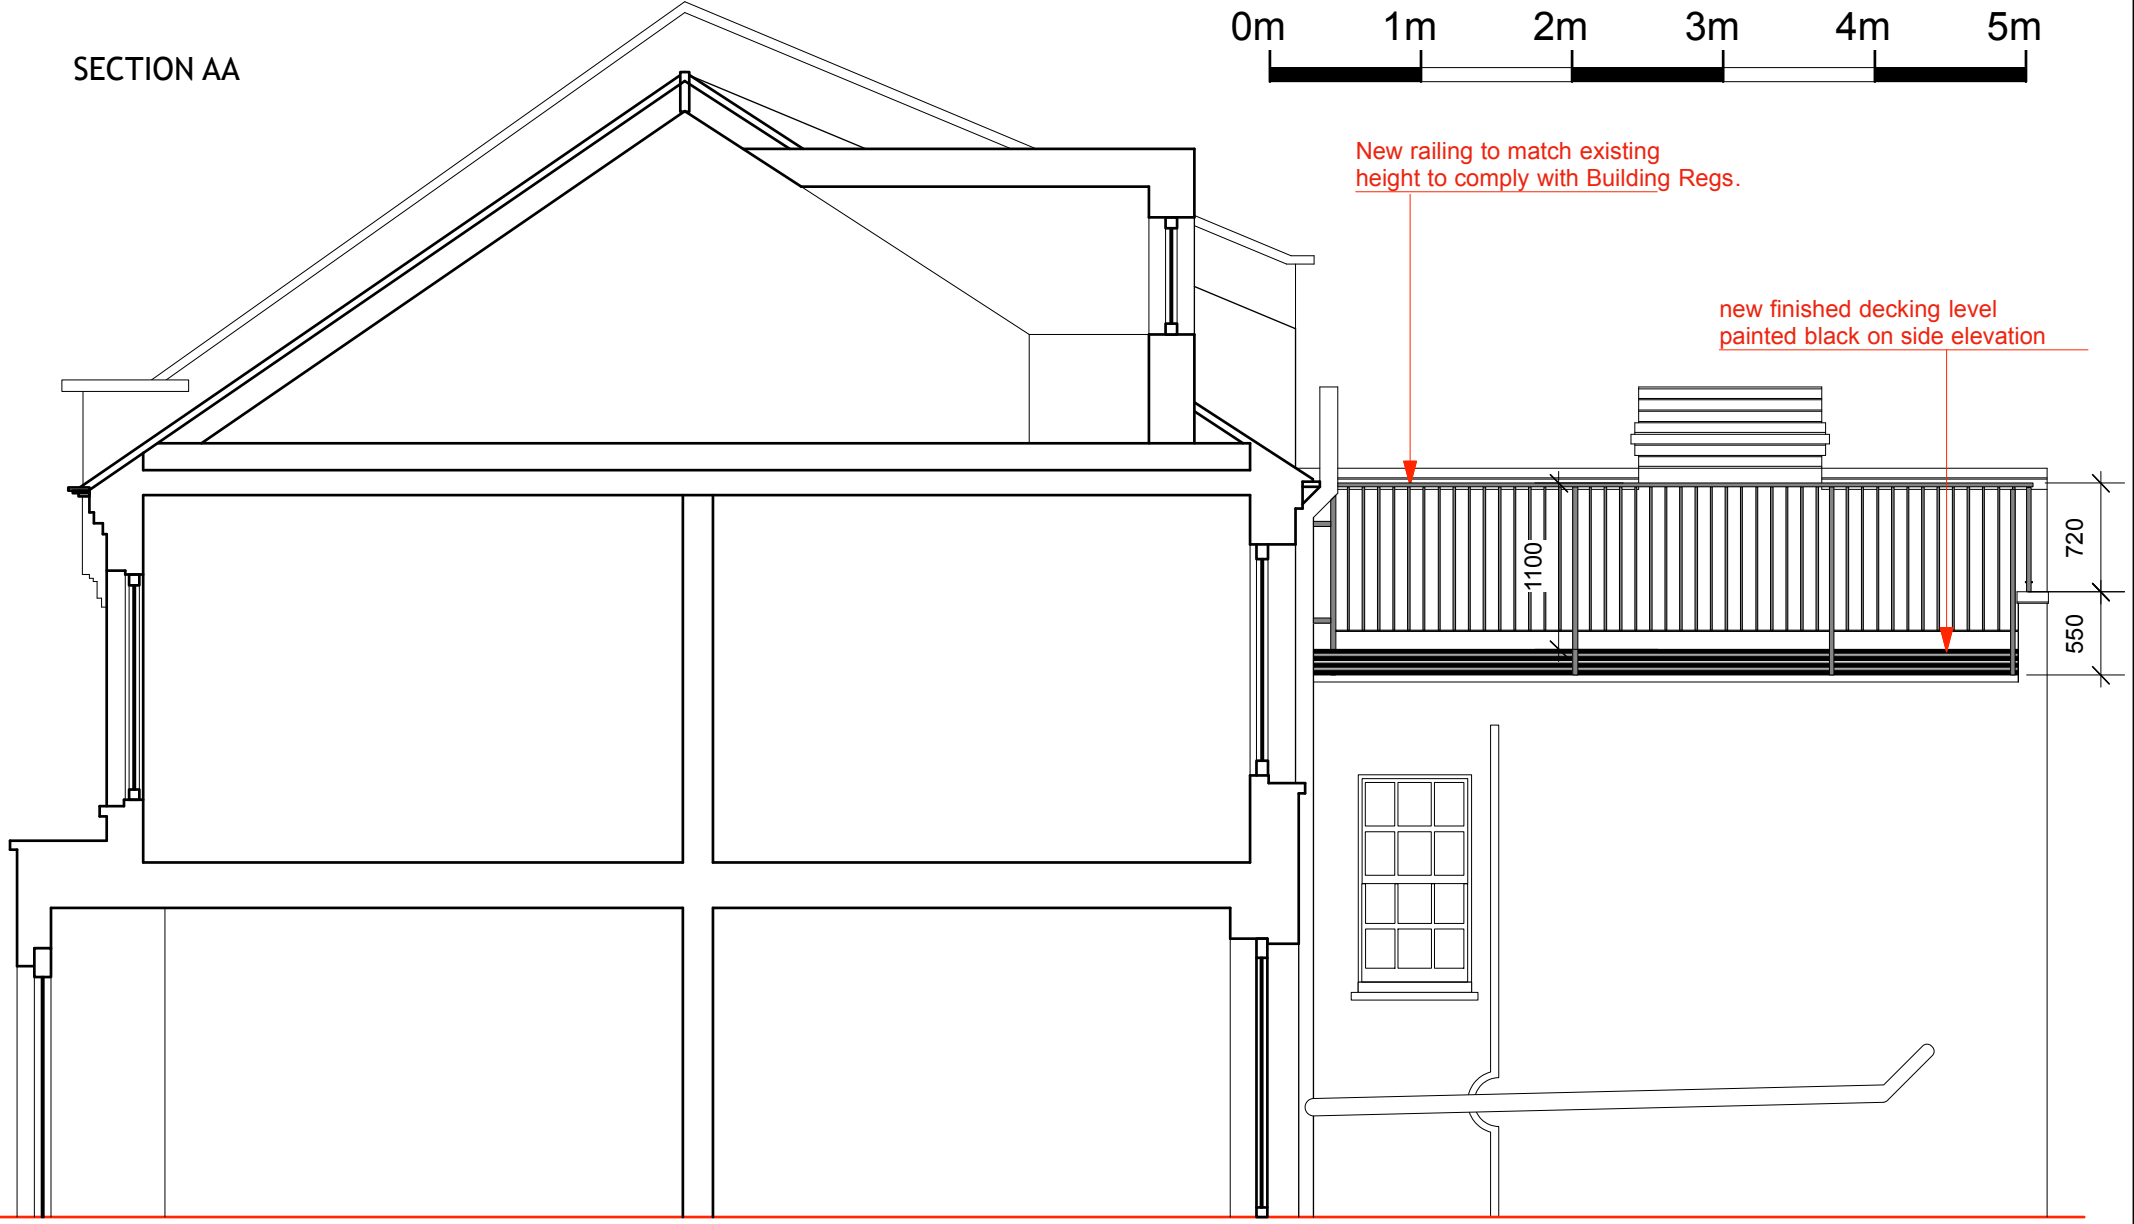

SECTION BB

