


## Cross Section Through Clean Cover for remediation of contamination in soft landscaping areas

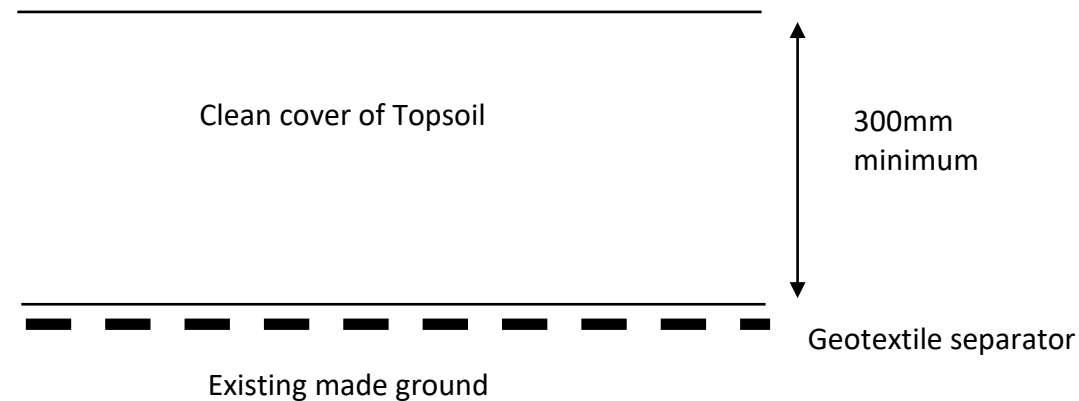

### Notes:

1. Remedial measures for soft landscaping areas only.
2. Existing made ground to be removed to allow placement of a minimum of 300mm of clean cover materials.
3. Additional materials may be removed as part of groundworks, reduced level dig or for groundworks operations.
4. Formation should be visually inspected. Any significant contamination should be reported immediately.
5. Geotextile separator layer to be placed at formation level prior to placement of clean cover materials.
6. Clean cover to comprise certified topsoil (max 300mm) or certified subsoil with certified topsoil over.
7. All imported materials to be certified as clean and suitable for use. Additional check sampling and testing may be required.