Tamlite Lighting

Data sheet



BRAVOExterior modern bulkhead









Features:

High quality bulkhead Modern architectural styling Easy maintenance diffuser CRI: Ra>80

Up to 80 lumens per Watt efficacy 50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body finished in black Clear polycarbonate diffuser High quality silicone gasket Supplied as standard with neutral white (4000K) LED

Options:

PC - Photocell

HFS - Microwave movement sensor

D - Dimmable DALI

M3 - 3 hours integrated emergency

Tamlite Lighting

Data sheet






Order Codes

All dimensions are in millimetres

Order code	Description	Lumens (Im)	Total power (W)	Efficacy (Im/W)	Weight (kg)
WBV15LED	15W-4000K	1200	15	85	2.5

Dimensions		All dimensions are in millimetres			
Order code	Α	В	С		
WBV15LED	267	300	185		

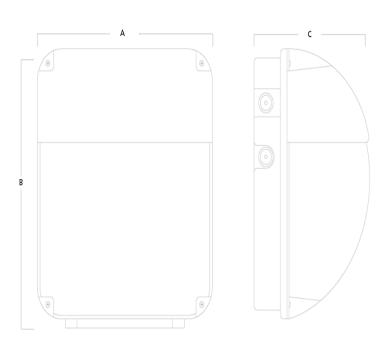

Installation instructions:

Fixed via fixing holes and wired via rear cable entry

To specify:

Die-cast LED IP65 weatherproof bulkhead as per Tamlite Bravo range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.



Tamlite Sales Centre.
Tel: 01527 517777
Fax: 01527 517666
e-mail: sales@tamlite.co.uk

Tamlite Technical. Tel: 01952 292441 Fax: 01952 292155 e-mail: technical@tamlite.co.uk



