


Gap between single glazed window and secondary glazing minimum of 35mm.

Existing single glazed timber window to be exactly same to keep the heritage look of the building and new secondary glazing to be fitted for thermal proposes to stop condensation and noises

Notes:

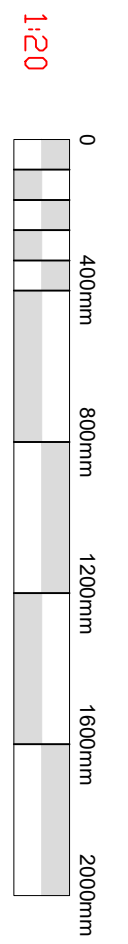

**EMPLOYER'S AGENTS & PROJECT MANAGERS**  
Unit A Court House 11a High Street Barnet  
LONDON EN5 5UJ  
TEL: 020 8446 5537  
E-MAIL: [INFO@WALKERMANAGEMENT.CO.UK](mailto:INFO@WALKERMANAGEMENT.CO.UK)

TITLE  
**Window section with Secondary glazing**

PROJECT  
27 Randolph Street

CLIENT  
**CIRCLE 33 HOUSING / KIER**

SCALE: AS IDENTIFIED  
CAD FILE: -  
DATE: 19.04.18  
DRAWN BY: WM  
CHECKED:

PROJECT NO.	DRAWING NO.	REVISION
3851	3851/WM/15	R-2