

Landmark Trees

ARBORICULTURAL IMPACT ASSESSMENT REPORT:

1a Wadham Gardens
London
NW3 3DN

REPORT PREPARED FOR:

Marcus Cooper Group
16 Finchley Road
London
NW8 6EB

REPORT PREPARED BY

Adam Hollis
MSc ARB MICFor FArbor A MRICS C Env

Ref: MCG_1aWDM_AIA_01

Date: 6th September 2015

The content and format of this report are for the exclusive use of the client. It may not be sold, lent, hired out or divulged to any third party, not directly involved in the subject matter without Landmark Trees' written consent

Web: www.landmarktrees.co.uk
e-mail: info@landmarktrees.co.uk
Tel: 0207 851 4544

London Office: 20 Broadwick Street, London, W1F 8HT

Registered Office: Grange Cottage, All Cannings, Devizes, Wiltshire, SN10 3NR

Landmark Trees is the trading name of Landmark trees Ltd. Registered in Wales. Reg No. 3882076



Section	Content	Page N°
1.0	SUMMARY	5
2.0	INTRODUCTION	6
3.0	OBSERVATIONS	8
4.0	DEVELOPMENT CONSTRAINTS	10
5.0	ARBORICULTURAL IMPACTS	13
6.0	DISCUSSION	14
7.0	CONCLUSION	14
8.0	RECOMMENDATIONS	14
9.0	REFERENCES	16

Appendices

APPENDIX 1	Survey Data	17
APPENDIX 2	Tree Works Recommendations	19
APPENDIX 3	Tree Constraints Plan	21
APPENDIX 4	Impact Assessment Plan(s)	23

Caveats

This report is primarily an arboricultural report. Whilst comments relating to matters involving built structures or soil data may appear, any opinion thus expressed should be viewed as qualified, and confirmation from an appropriately qualified professional sought. Such points are usually clearly identified within the body of the report. It is not a full safety survey or subsidence risk assessment survey. These services can be provided but a further fee would be payable. Where matters of tree condition with a safety implication are noted during a survey they will of course appear in the report.

A tree survey is generally considered invalid in planning terms after 2 years, but changes in tree condition may occur at any time, particularly after acute (e.g. storm events) or prolonged (e.g. drought) environmental stresses or injuries (e.g. root severance). Routine surveys at different times of the year and within two - three years of each other (subject to the incidence of the above stresses) are recommended for the health and safety management of trees remote from highways or busy access routes. Annual surveys are recommended for the latter.

Tree works recommendations are found in the Appendices to this report. It is assumed, unless otherwise stated ("ASAP" or "Option to") that all husbandry recommendations will be carried out within 6 months of the report's first issue. Clearly, works required to facilitate development will not be required if the application is shelved or refused. However, necessary husbandry work should not be shelved with the application and should be brought to the attention of the person responsible, by the applicant, if different. Under the Occupiers Liability Act of 1957, the owner (or his agent) of a tree is charged with the due care of protecting persons and property from foreseeable damage and injury.' He is responsible for damage and/or nuisance arising from all parts of the tree, including roots and branches, regardless of the property on which they occur. He also has a duty under The Health and Safety at Work Act 1974 to provide a safe place of work, during construction. Tree works should only be carried out with local authority consent, where applicable.

Inherent in a tree survey is assessment of the risk associated with trees close to people and their property. Most human activities involve a degree of risk, such risks being commonly accepted if the associated benefits are perceived to be commensurate.

Risks associated with trees tend to increase with the age of the trees concerned, but so do many of the benefits. It will be appreciated, and deemed to be accepted by the client, that the formulation of recommendations for all management of trees will be guided by the cost-benefit analysis (in terms of amenity), of tree work that would remove all risk of tree related damage.

Prior to the commencement of any tree works, an ecological assessment of specific trees may be required to ascertain whether protected species (e.g. bats, badgers and invertebrates etc.) may be affected.

Tree Constraints & Protection Overview

Client:	Marcus Cooper Group	Case Ref:	MCG_1aWDM_AIA_01
Local Authority:	LB Camden	Date:	6 th September 2015
Site Address: 1a Wadham Gardens, London NW3 3DN			
Proposal: basement extension to an apartment building			
Report Checklist	Y/N		Y/N
Arboricultural constraints on site	Y	Trees removal proposed	Y
Tree Survey	Y	Topographical Survey	Y
BS5837 Report	Y	Conservation Area	Y
Tree Preservation Orders	NK		
Tree Protection Plan:	N/a	(Include in future method statement)	
Tree Constraints Plan:	Y		
Arboricultural Impact Assessment:	Y		
Site Layout			
Site Visit	Y	Date: 21/07/15	Access Full/Partial/None F
Trees on Site	Y	Off-site Trees	Y
Trees affected by development	N	O/s trees affected by development	Y
Tree replacement proposed:	N	On or off-site trees indirectly affected by development	N
Trees with the potential to be affected			
None directly impacted; street tree T3 would benefit from hoarding to protect stem from incidental damage from construction access to site.			
Comments			
T5 hawthorn requires further investigation regardless of development, though pertinent to maintaining a safe site of work.			
Recommendations			
1	Proposal will mean the loss of important trees (TPO/CA)		N
2	Proposal has sufficient amelioration for tree loss		N/a
3	Proposals provide adequate tree protection measures		Y
4	Proposal will mean retained trees are too close to buildings		N
5	Specialist demolition / construction techniques required		N
6	The Proposal will result in significant root damage to retained trees		N
7	Further investigation of tree condition recommended		Y

RPA= Root Protection Area

TPP= Tree Protection Plan

AMS= Arboricultural Method Statement

AIA = Arboricultural Implication Assessment

BS5837: 2012 'Trees in relation to design, demolition and construction – Recommendations'

Arboricultural Impact Assessment Report : 4a Wadham Gardens, London NW3 3DN

Prepared for: Marcus Cooper Group, 16 Finchley Road, London NW8 6EB

Prepared by: Adam Hollis of Landmark Trees, 20 Broadwick Street, London W1F 8HT

1. SUMMARY

- 1.1 This report comprises an arboricultural impact assessment of the proposals for 1a Wadham Gardens, London NW3 3DN, reviewing any conflicts between the proposals and material tree constraints identified in our survey.
- 1.2 There are 5 trees surveyed on or around the site, of which 3 are B category *(Moderate Quality) and 2 are C category *(Low Quality), though T5 might be demoted to U category *(Unsuitable for Retention), subject to further investigation. In theory, only moderate quality trees and above are significant material constraints on development. However, the low quality trees would comprise a constraint in aggregate, in terms of any collective loss / removal, where replacement planting would be appropriate. In this instance, no such collective impact is proposed, though street tree, T3, would benefit from hoarding to protect its stem from incidental damage from construction access to site.
- 1.3 There are no primary impacts from the proposals, as all trees but T5 are off-site and the basement extension is essentially within the existing footprint..
- 1.4 Because the proposals are for basement extension, there are no secondary impacts / post-development conflicts associated with the proposal and tree canopies.
- 1.5 The site has potential for development without impacting at all on the wider tree population or local landscape. Thus, with suitable mitigation and supervision the scheme is recommended to planning.

* British Standards Institute: Trees in relation to design, demolition and construction BS 5837: 2012 HMSO, London

2. INTRODUCTION

2.1 Terms of reference

- 2.1.1 LANDMARK TREES were asked by Marcus Cooper Group, 16 Finchley Road, London NW8 6EB to provide a survey and an arboricultural impact assessment of proposals for the site: 1a Wadham Gardens, London NW3 3DN. The report is to accompany a planning application.
- 2.1.2 The proposals are for a basement extension to an apartment building. This report will assess the impact on the trees and their constraints, identified in our survey. Although the proposals were known at the time of the survey, Landmark Trees endeavour to survey each site blind, working from a topographical survey, wherever possible, with the constraints plan informing their evolution.
- 2.1.3 I am a Registered Consultant and Fellow of the Arboricultural Association and a Chartered Forester, with a Masters Degree in Arboriculture and 25 years experience of the landscape industry - including the Forestry Commission and Agricultural Development and Advisory Service. I am a UK Registered Expert Witness, trained in single joint expert witness duties. I am also Chairman of the UK & I Regional Plant Appraisal Committee, inaugurated to promote international standards of valuation in arboriculture.

2.2 Drawings supplied

- 2.2.1 The drawings supplied by the client and relied upon by Landmark Trees in the formulation of our survey plans are:
- Existing site survey: 15191-100 A1_TCP (1)*
- Proposals: 1179-01 Proposed - RevB - Lower Ground Floor
- 1179-02 Proposed - RevB - Ground Floor

*In the absence of a full topographical survey, tree positions may be approximate only.

2.3 Scope of survey

- | | |
|-------|--|
| 2.3.1 | As Landmark Trees' (LT) arboricultural consultant, I surveyed the trees on site on 21 st July 2015, recording relevant qualitative data in order to assess both their suitability for retention and their constraints upon the site, in accordance with British Standard 5837:2012 Trees in relation to design, demolition and construction – Recommendations [BS5837:2012]. |
| 2.3.2 | Our survey of the trees, the soils and any other factors, is of a preliminary nature. The trees were SURVEYED on the basis of the Visual Tree Assessment method expounded by Mattheck and Breloer (The Body Language of Trees, DoE booklet Research for Amenity Trees No. 4, 1994). LT have not taken any samples for analysis and the trees were not climbed, but inspected from ground level. |
| 2.3.3 | A tree survey is generally considered invalid in planning terms after 2 years, but changes in tree condition may occur at any time, particularly after acute (e.g. storm events) or prolonged (e.g. drought) environmental stresses or injuries (e.g. root severance). Routine surveys at different times of the year and within two - three years of each other (subject to the incidence of the above stresses) are recommended for the health and safety management of trees remote from highways or busy access routes. Annual surveys are recommended for the latter. |
| 2.3.4 | The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services. |

2.4 Survey data & report layout

- | | |
|-------|---|
| 2.4.1 | Detailed records of individual trees are given in the survey schedule in Appendix 1 to this report. |
| 2.4.2 | A site plan identifying the surveyed trees, based on the client's drawings / topographical survey is provided in Appendix 3. |
| 2.4.3 | This plan also serves as the Tree Constraints Plan with the theoretical Recommended Protection Areas (RPA's), tree canopies and shade constraints, (from BS5837: 2012) overlain onto it. These constraints are then overlain in turn onto the client's proposals to create an Arboricultural Impact Assessment Plan in Appendix 4. General observations and discussion follow, below. |

3.0 OBSERVATIONS

3.1 Site description



Photograph 1: Aerial View of 1 Wadham Gardens (outlined in red)

- | | |
|-------|---|
| 3.1.1 | 1a Wadham Gardens is a three-bed cottage within number 1 Wadham Gardens. The property comprises the northern half of the building. Both properties are currently in residential use. The site is relatively level, but terraced on the northern boundary to accommodate a rise in levels between properties. |
| 3.1.2 | In terms of the British Geological Survey, the site overlies the London Clay Formation (see indicated location on Fig.1 plan extract below). The associated soils are generally, highly shrinkable clay; e.g. slowly permeable seasonally waterlogged fine loam over clay. Such highly plastic soils are prone to movement: subsidence and heave. The actual distribution of the soil series are not as clearly defined on the ground as on plan and there may be anomalies in the actual composition of clay, silt and sand content. |
| 3.1.3 | Clay soils are prone to compaction during development with damage to soil structure potentially having a serious impact on tree health. The design of foundations near problematic tree species will also need to take into consideration subsidence risk. Further advice from the relevant experts on the specific soil properties can be sought as necessary. |

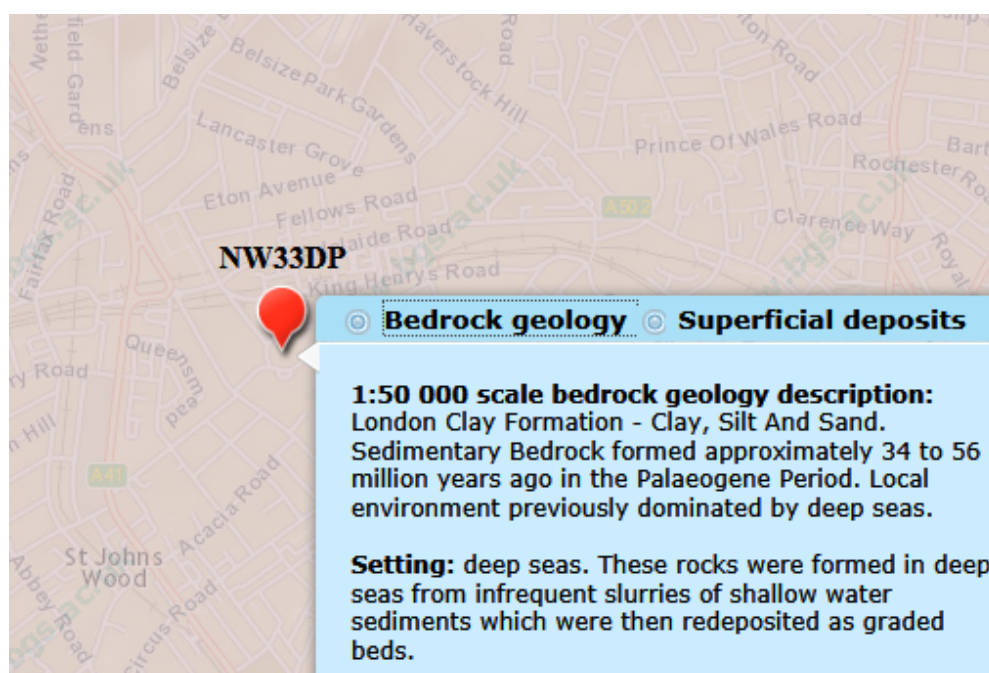


Figure 1: Extract from the BGS Geology of Britain Viewer

3.2 Subject trees

3.2.1 There are 5 trees surveyed on or around the site, of which 3 are B category *(Moderate Quality) London plane and sycamores and 2 are C category *(Low Quality) trees, though T5 hawthorn might be demoted to U category *(Unsuitable for Retention), subject to further investigation.

3.2.2 Full details of the surveyed tree can be found in Appendix 1 of this report.

3.3 Planning Status

3.3.1 There is no on-line information regarding Tree Preservation Orders in the borough; to find out if a tree is protected it is necessary to contact the tree preservation team by email on the website or Tel: 020 7974 4444. The site stands within the Elsworth Conservation Area, which will affect the subject trees: it is a criminal offence to prune, damage or fell such trees without permission from the local authority.

4.0 DEVELOPMENT CONSTRAINTS

4.1 Primary constraints

- 4.1.1 BS5837: 2012 gives Recommended Protection Areas (RPA's) for any given tree size. The individual RPA's are calculated in the Tree Schedule in Appendix 1 to this report, or rather the notional radius of that RPA, based on a circular protection zone. The prescribed radius is 12-x stem diameter at 1.5m above ground level, except where composite formulae are used in the case of multi-stemmed trees.
- 4.1.2 Circular RPA's are appropriate for individual specimen trees grown freely, but where there is ground disturbance, the morphology of the RPA can be modified to an alternative polygon, as shown in the diagram below (Figure 2). Alternatively, one need principally remember that RPA's are area-based and not linear – notional rather than fixed entities. **No modifications have been made in this instance (please see overleaf), though trees may be variously affected by road on the one hand and building on the other. In this case, modification is likely to be somewhat academic, since the trees will not be impacted.**

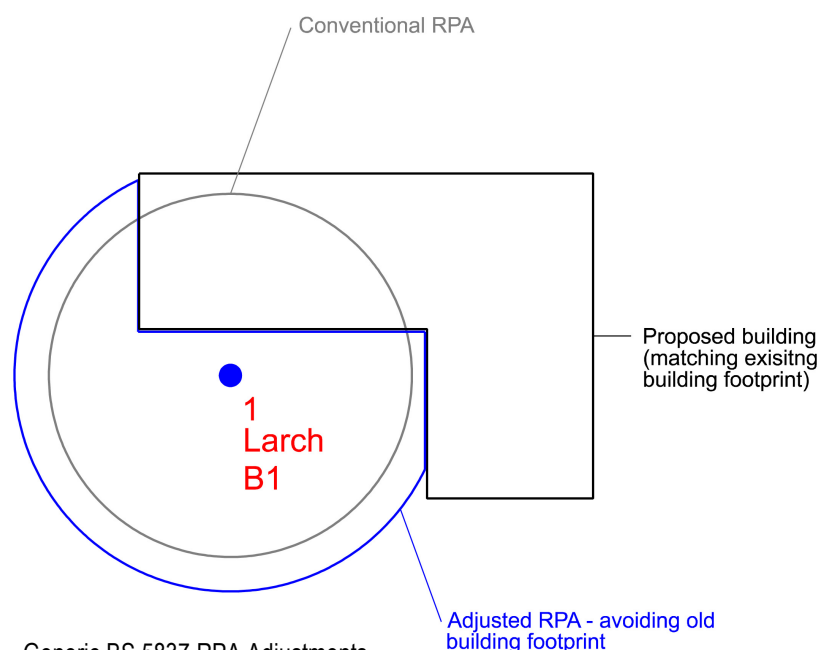


Figure 2 – Generic BS 5837 RPA Adjustments

- 4.1.3 In BS5837, paragraph 4.6.2 states that RPA's should reflect the morphology and disposition of the roots; where pre-existing site conditions or other factors indicate that rooting has occurred asymmetrically, a polygon of equivalent area should be produced. Modifications to the shape of the RPA should reflect a soundly based arboricultural assessment of likely root distribution.

- 4.1.4 Such assumptions cannot be proved without prior site investigations / trial pits. Where it is not always possible to conduct site investigations (e.g. below busy roads), we can always look to the published science. There seems little support for the popular myth that roads and services will curb root growth: research for the International Society of Arboriculture by Kopinga J (ISA 1994), found that “a constant high moisture content of the soil directly underneath the pavement surface can be considered as a major soil factor in attracting the trees’ roots to develop there.” By contrast, grass in lawns may actively antagonise tree roots with natural pathogens. Similarly, Professor F Miller (ISA 1994) found that service trenches at > 3m distances from trees had minimal impact on growth or crown shape.
- 4.1.5 A key misunderstanding, even among professionals, is that we conflate the RPA with the actual root system: RPA's are *prima facie* a notion / convention / treaty and almost entirely theoretical, but readily calculable. Conversely roots are a "known unknown," spatial entity that we predict at our folly. Yet, many are quick to do so.
- 4.1.6 LT favour the neutrality of a circular RPA, because in a difference of opinion, the tree officer will always have the prerogative to dictate the final modification of shape. With the best will in the world, the free allowance of modifications will tend to lead to inequitable outcomes, prejudicing the applicant and the practice is in our view, best avoided. The neutral circle dispenses with this inequity.
- 4.1.7 Ultimately, the point of the circular RPA is to illustrate areas of concern. The purpose of this report is to consider areas of concern (not to modify them to suit our argument or findings). Therefore, no modifications are made here to the RPA's, regardless of roads etc.
- 4.1.8 The quality of trees will also be a consideration: U Category trees are discounted from the planning process in view of their limited service life. Again, Category-C trees would not normally constrain development individually, unless they provide some external screening function.
- 4.1.9 At paragraph 5.1.1. BS5837: 2012 notes that “Care should be exercised over misplaced tree preservation; attempts to retain too many or unsuitable trees on a site are liable to result in excessive pressure on the trees during demolition or construction work, or post-completion demands on their removal.”

- 4.1.10 In theory, only moderate quality trees and above are significant material constraints on development. However, the low quality trees would comprise a constraint in aggregate, in terms of any collective loss / removal, where replacement planting would be appropriate. In this instance, no such collective impact is proposed, though street tree, T3, would benefit from hoarding to protect its stem from incidental damage from construction access to site.

4.2 Secondary Constraints

4.2.1 The second type of constraint produced by trees that are to be retained is that the proximity of the proposed development to the trees should not threaten their future with ever increasing demands for tree surgery or felling to remove nuisance shading (Figure 3), honeydew deposition or perceived risk of harm.

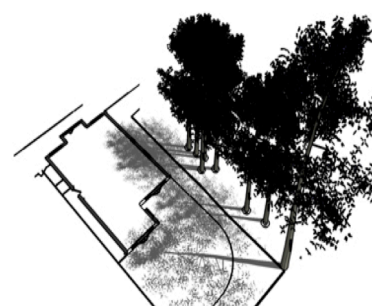


Figure 3 –
Generic Shading Constraints

4.2.2 The shading constraints are crudely determined from BS5837 by drawing an arc from northwest to east of the stem base at a distance equal to the height of the tree, as shown in the diagram opposite. Shade is less of a constraint on non-residential developments, particularly where rooms are only ever temporarily occupied.




Figure 4 – Shading Arc

4.2.3 This arc (see Figure 4) represents the effects that a tree will have on layout through shade, based on shadow patterns of 1x tree height for a period May to Sept inclusive 10.00-18.00 hrs daily.

4.2.4 Assuming that it will be retained, the off-site tree has the potential to provide a variety of secondary constraints, including shading and organic deposition. The significance of these constraints will vary depending on the location and proximity to the proposed re-development.

Note: Sections 5 & 6 will now assess the impacts upon constraints identified in Section 4. Table 1 in Section 5 presents the impacts in tabular form (drawing upon survey data presented in Appendices 1 & 2). Impacts are presented in terms of whole tree removal and the effect on the landscape or partial encroachment (% of RPA) and its effect on individual tree health. Section 6 discusses the table data, elaborating upon the impacts' significance and mitigation.

Table 1: Arboricultural Impact Assessment
(Impacts assessed prior to mitigation and rated with reference to Matheny & Clark (1998))

Hide irrelevant

Show All Trees

Ref: HBA/1aWDG/AIA

B.S. Cat.	Tree No.	Species	Impact	Tree / RPA Affected	Age	Growth Vitality	Species Tolerance	Impact on Tree Rating	Impact on Site Rating	Mitigation
B	3	Plane, London	Possibility of construction access damage if unprotected	m ² N/A %	Semi-mature	Normal	Good	Very Low	N/A	Hoarding of stem

6.0 DISCUSSION

6.1 Rating of Primary Impacts

6.1.1 There are no primary impacts from the proposals, as all trees but T5 are off-site and the basement extension is essentially within the existing footprint.

6.2 Rating of Secondary impacts

6.2.1 Because the proposals are for basement extension, there are no secondary impacts / post-development conflicts associated with the proposal and tree canopies.

6.3 Mitigation of Impacts

6.3.1 N/a - T3, would benefit from hoarding to protect its stem from incidental damage from construction access to site. Similarly, ground protection will be required to protect the RPA near works, during construction.

6.3.2 Any replacement paving/hard landscaping within RPA will require a no-dig construction technique, either using a cellular confinement system with no fines aggregate for the sub-base or simply building upon the existing sub-base without disturbing the ground below. Choice of construction method will initially depend upon root penetration within the existing sub-grade. The key principle is not to excavate in the presence of roots and to provide a porous surface to promote healthy soil water relations for future root growth.

7.0 CONCLUSION

7.1 There are no direct impacts of development.

7.2 Incidental construction impacts can be mitigated through precautionary measures. These measures can be elaborated in Method Statements in the discharge of planning conditions, as necessary.

7.3 Therefore, the proposals will not have any significant impact on either the retained tree or wider landscape. Thus, with suitable mitigation and supervision the scheme is recommended to planning.

8.0 RECOMMENDATIONS

8.1 General Recommendations

- 8.1.1 Any trees which are in close proximity to the proposed development should be protected with a Tree Protection Barrier (TPB). Protective barrier fencing should be installed immediately following the completion of the tree works, remaining in situ for the entire duration of the development unless otherwise agreed in writing by the council. It should be appropriate for the intensity and proximity of the development, usually comprising steel, mesh panels 2.4m in height ('Heras') and should be mounted on a scaffolding frame (shown in Fig 2 of BS5837:2012). The position of the TPB can be shown on plan as part of the discharge of conditions, once the lay out is agreed with the planning authority. The TPB should be erected prior to commencement of works, remain in its original form on-site for the duration of works and removed only upon full completion of works.
- 8.1.2 A TPB may no longer be required during soft landscaping work but a full arboricultural assessment must be performed prior to the undertaking of any excavations within the RPA of a tree. This will inform a decision about the requirement of protection measures. It is important that all TPBs have permanent, weatherproof notices denying access to the RPA.
- 8.1.3 The necessary machinery should be located above the existing grade level and work away from any retained trees. This will ensure that any spoil is removed from the RPAs. It is vital that the original soil level is not lowered as this is likely to cause damage to the shallow root systems.
- 8.1.5 If sections of hard surfacing are proposed in close proximity to trees, it is recommended that "No-Dig" surfacing be employed in accordance with BS5837:2012 and 'The Principles of Arboricultural Practice: Note 1, Driveways Close to Trees, AAIS 1996 [APN1]'.
- 8.1.6 If the RPA of a tree is encroached by underground service routes then BS5837:2012 and NJUG VOLUME 4 provisions should be employed. If it is deemed necessary, further arboricultural advice must be sought.
- 8.1.7 Numerous site activities are potentially damaging to trees e.g. parking, material storage, the use of plant machinery and all other sources of soil compaction. In operating plant, particular care is required to ensure that the operational arcs of excavation and lifting machinery, including their loads, do not physically damage trees when in use.
- 8.1.8 To enable the successful integration of the proposal with the retained trees, the following points will need to be taken into account:
- 1) Plan of underground services.
 - 2) Schedule of tree protection measures, including the management of harmful substances.

3)	Method statements for constructional variations regarding tree proximity (e.g. foundations, surfacing and scaffolding).
4)	Site logistics plan to include storage, plant parking/stationing and materials handling.
5)	Site supervision: the Site Agent must be nominated to be responsible for all arboricultural matters on site. This person must: <ul style="list-style-type: none"> ■ be present on site for the majority of the time; ■ be aware of the arboricultural responsibilities; ■ have the authority to stop work that is causing, or may cause harm to any tree; ■ ensure all site operatives are aware of their responsibilities to the trees on site and the consequences of a failure to observe these responsibilities; ■ make immediate contact with the local authority and/or a retained arboriculturalist in the event of any tree related problems occurring.
8.2.9	These points can be resolved and approved through consultation with the planning authority via their Arboricultural Officer.
8.2.10	The sequence of works should be as follows: <ul style="list-style-type: none"> i) installation of TPB for demolition & construction; ii) installation of underground services; iii) installation of ground protection; iv) main construction; v) removal of TPB; vi) soft landscaping.

9.0 REFERENCES

- Barlow JF & Harrison G. 1999. Shade By Trees, Arboricultural Practice Note 5, AAIS, Farnham, Surrey.
- British Standards Institute. 2012. Trees in Relation to Design, Demolition and Construction - Recommendations BS 5837: 2012 HMSO, London.
- Centre for Ecology & Hydrology. 2006. Tree Roots in the Built Environment, HMSO, London.
- Helliwell R (1980) Provision for New Trees; Landscape Design; July/August issue
- International Society of Arboriculture (ISA). 1994. The Landscape Below Ground. ISA, Champaign, Illinois. USA.
- Lonsdale D 1999. Research for Amenity Trees No.7: Principles of Tree Hazard Assessment and Management, HMSO, London.
- Matheny, N; Clark, J. R.1998. Trees and Development: A Technical Guide to Preservation of Trees during Land Development. ISA, Champaign, Illinois. USA.
- Mattheck C. & Breloer H. 1994. Research for Amenity Trees No.2: The Body Language of Trees, HMSO, London.
- Thomas P, 2000. Trees: Their Natural History, Cambridge University Press, Cambridge.
- Trowbridge J & Bassuk N (2004) Trees in the Urban Landscape: Site Assessment, Design, and Installation; J Wiley & Sons inc. NJ USA

APPENDIX 1

TREE SCHEDULE

Notes for Guidance:

1. Height describes the approximate height of the tree measured in metres from ground level.
2. The Crown Spread refers to the crown radius in meters from the stem centre and is expressed as an average of NSEW aspect if symmetrical.
3. Ground Clearance is the height in metres of crown clearance above adjacent ground level.
4. Stem Diameter (Dm) is the diameter of the stem measured in millimetres at 1.5m from ground level for single stemmed trees. BS 5837:2012 formula (Section 4.6) used to calculate diameter of multi-stemmed trees. Stem Diameter may be estimated where access is restricted and denoted by '#'.
5. Protection Multiplier is 12 and is the number used to calculate the tree's protection radius and area
6. Protection Radius is a radial distance measured from the trunk centre.
7. Growth Vitality - Normal growth, Moderate (below normal), Poor (sparse/weak), Dead (dead or dying tree).
8. Structural Condition - Good (no or only minor defects), Fair (remediable defects), Poor - Major defects present.
9. Landscape Contribution - High (prominent landscape feature), Medium (visible in landscape), Low (secluded/among other trees).
10. B.S. Cat refers to (British Standard 5837:2012 section 4.5) and refers to tree/group quality and value; 'A' – High, 'B' - Moderate, 'C' - Low, 'U' - Unsuitable for retention. The following colouring has been used on the site plans:
 - High Quality (A) (Green),
 - Moderate Quality (B) (Blue),
 - Low Quality (C) (Grey),
 - Unsuitable for Retention (U) (Red)
11. Sub Cat refers to the retention criteria values where 1 is Arboricultural, 2 is Landscape and 3 is Cultural including Conservation, Historic and Commemorative.
12. Useful Life is the tree's estimated remaining contribution in years.



Site: 1a Wadham Gardens

Date: 21/7/15

Appendix 1

BS5837 Tree Constraints Survey Schedule

Landmark Trees Ltd

020 7851 4544


Surveyor(s): Adam Hollis

Ref: HBA/1aWDG/AIA

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
1	Sycamore	13	4	3.0	400	Early Mature	4.8	Normal	Good	B	2	>40	A tree with insignificant defects Restricted rooting N & W Unsuitable species for position: between houses
2	Cherry, Tibetan	4	1.5	2.0	80	Young	1.0	Moderate	Fair	C	2	>40	A sparser than normal canopy
3	Plane, London	12	6	2.0	270	Semi-mature	3.2	Normal	Good	B	2	>40	A tree with insignificant defects
4	Plane, London	16	4	6.0	770	Mature	9.2	Normal	Good	B	2	>40	A tree with insignificant defects
5	Hawthorn, Common	8	3	2.0	450	Mature	5.4	Poor	Fair	C	2	10+	Remote survey only (RS) Ivy smothered Low live crown ratio, tip dieback, wounds / decay on stem

APPENDIX 2

TREE WORKS RECOMMENDATIONS



Site: 1a Wadham Gardens

Date: 21/715

Surveyor(s): Adam Hollis
Ref: HBA/1aWDG/AIA

Appendix 2
Recommended Tree Works

Hide irrelevant
Show All Trees

Landmark Trees


Tree No.	English Name	B.S. Cat	Height	Ground Clearance	Crown Spread	Recommended Works	Comments/ Reasons
5	Hawthorn, Common	C	8	2.0	3	FInv Third-party tree?	Remote survey only (RS) Ivy smothered Low live crown ratio, tip dieback, wounds / decay on stem Recommended husbandry 2

APPENDIX 3

TREE CONSTRAINTS PLAN

APPENDIX 4**ARBORICULTURAL IMPACT ASSESSMENT PLAN(S)**

- i. Lower Ground Floor
- ii. Ground Floor

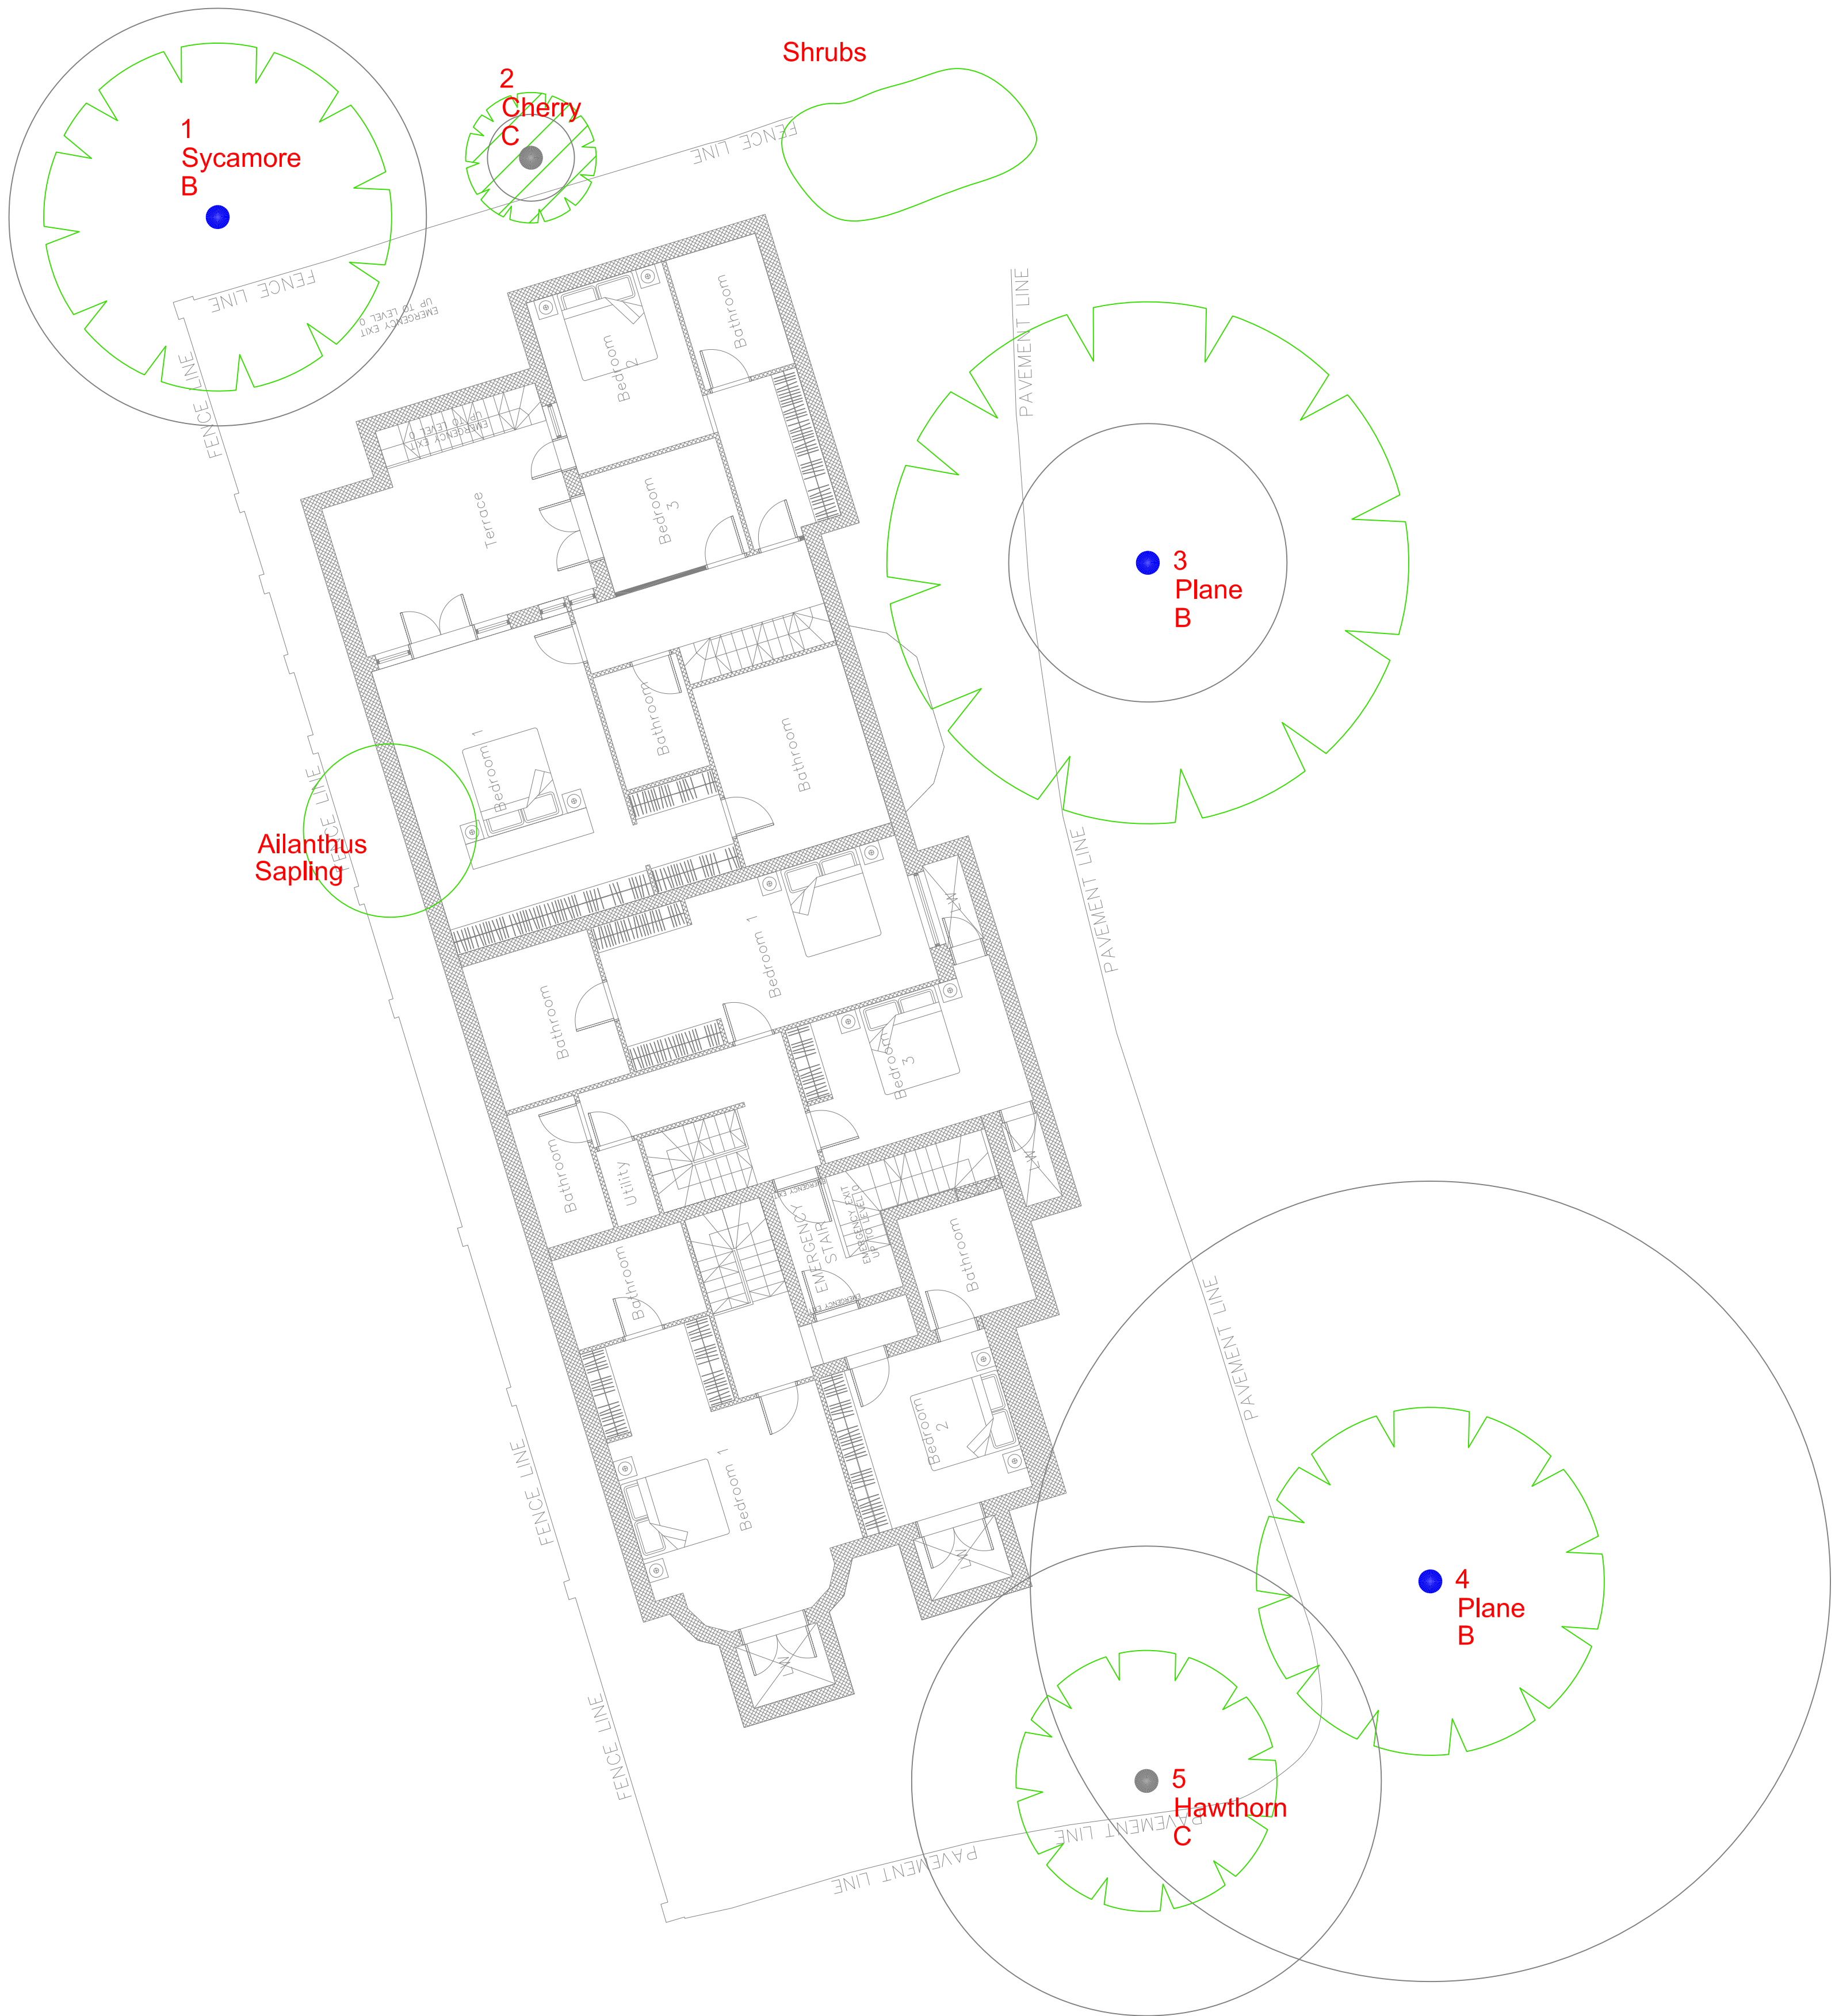

Proposed Lower Ground Floor Plan

NOTE:

This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No decay detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.

Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.

Root Protection Areas (RPA) are derived from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree base).



Landmark Trees


20 Broadwick Street, London, W1F 8HT
 Tel: 0207 851 4544 Mobile: 07812 989528
 e-mail: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk


Site: 1 Wadham Gardens	1:100@ A1
Drawing Title: Arboricultural Impacts Assessment	August 2015

Key:

- Category A High Quality
- Category B Moderate Quality
- Category C Low Quality
- Category U Trees Unsuitable for Retention

Tree Position Approximate (not shown on original survey)



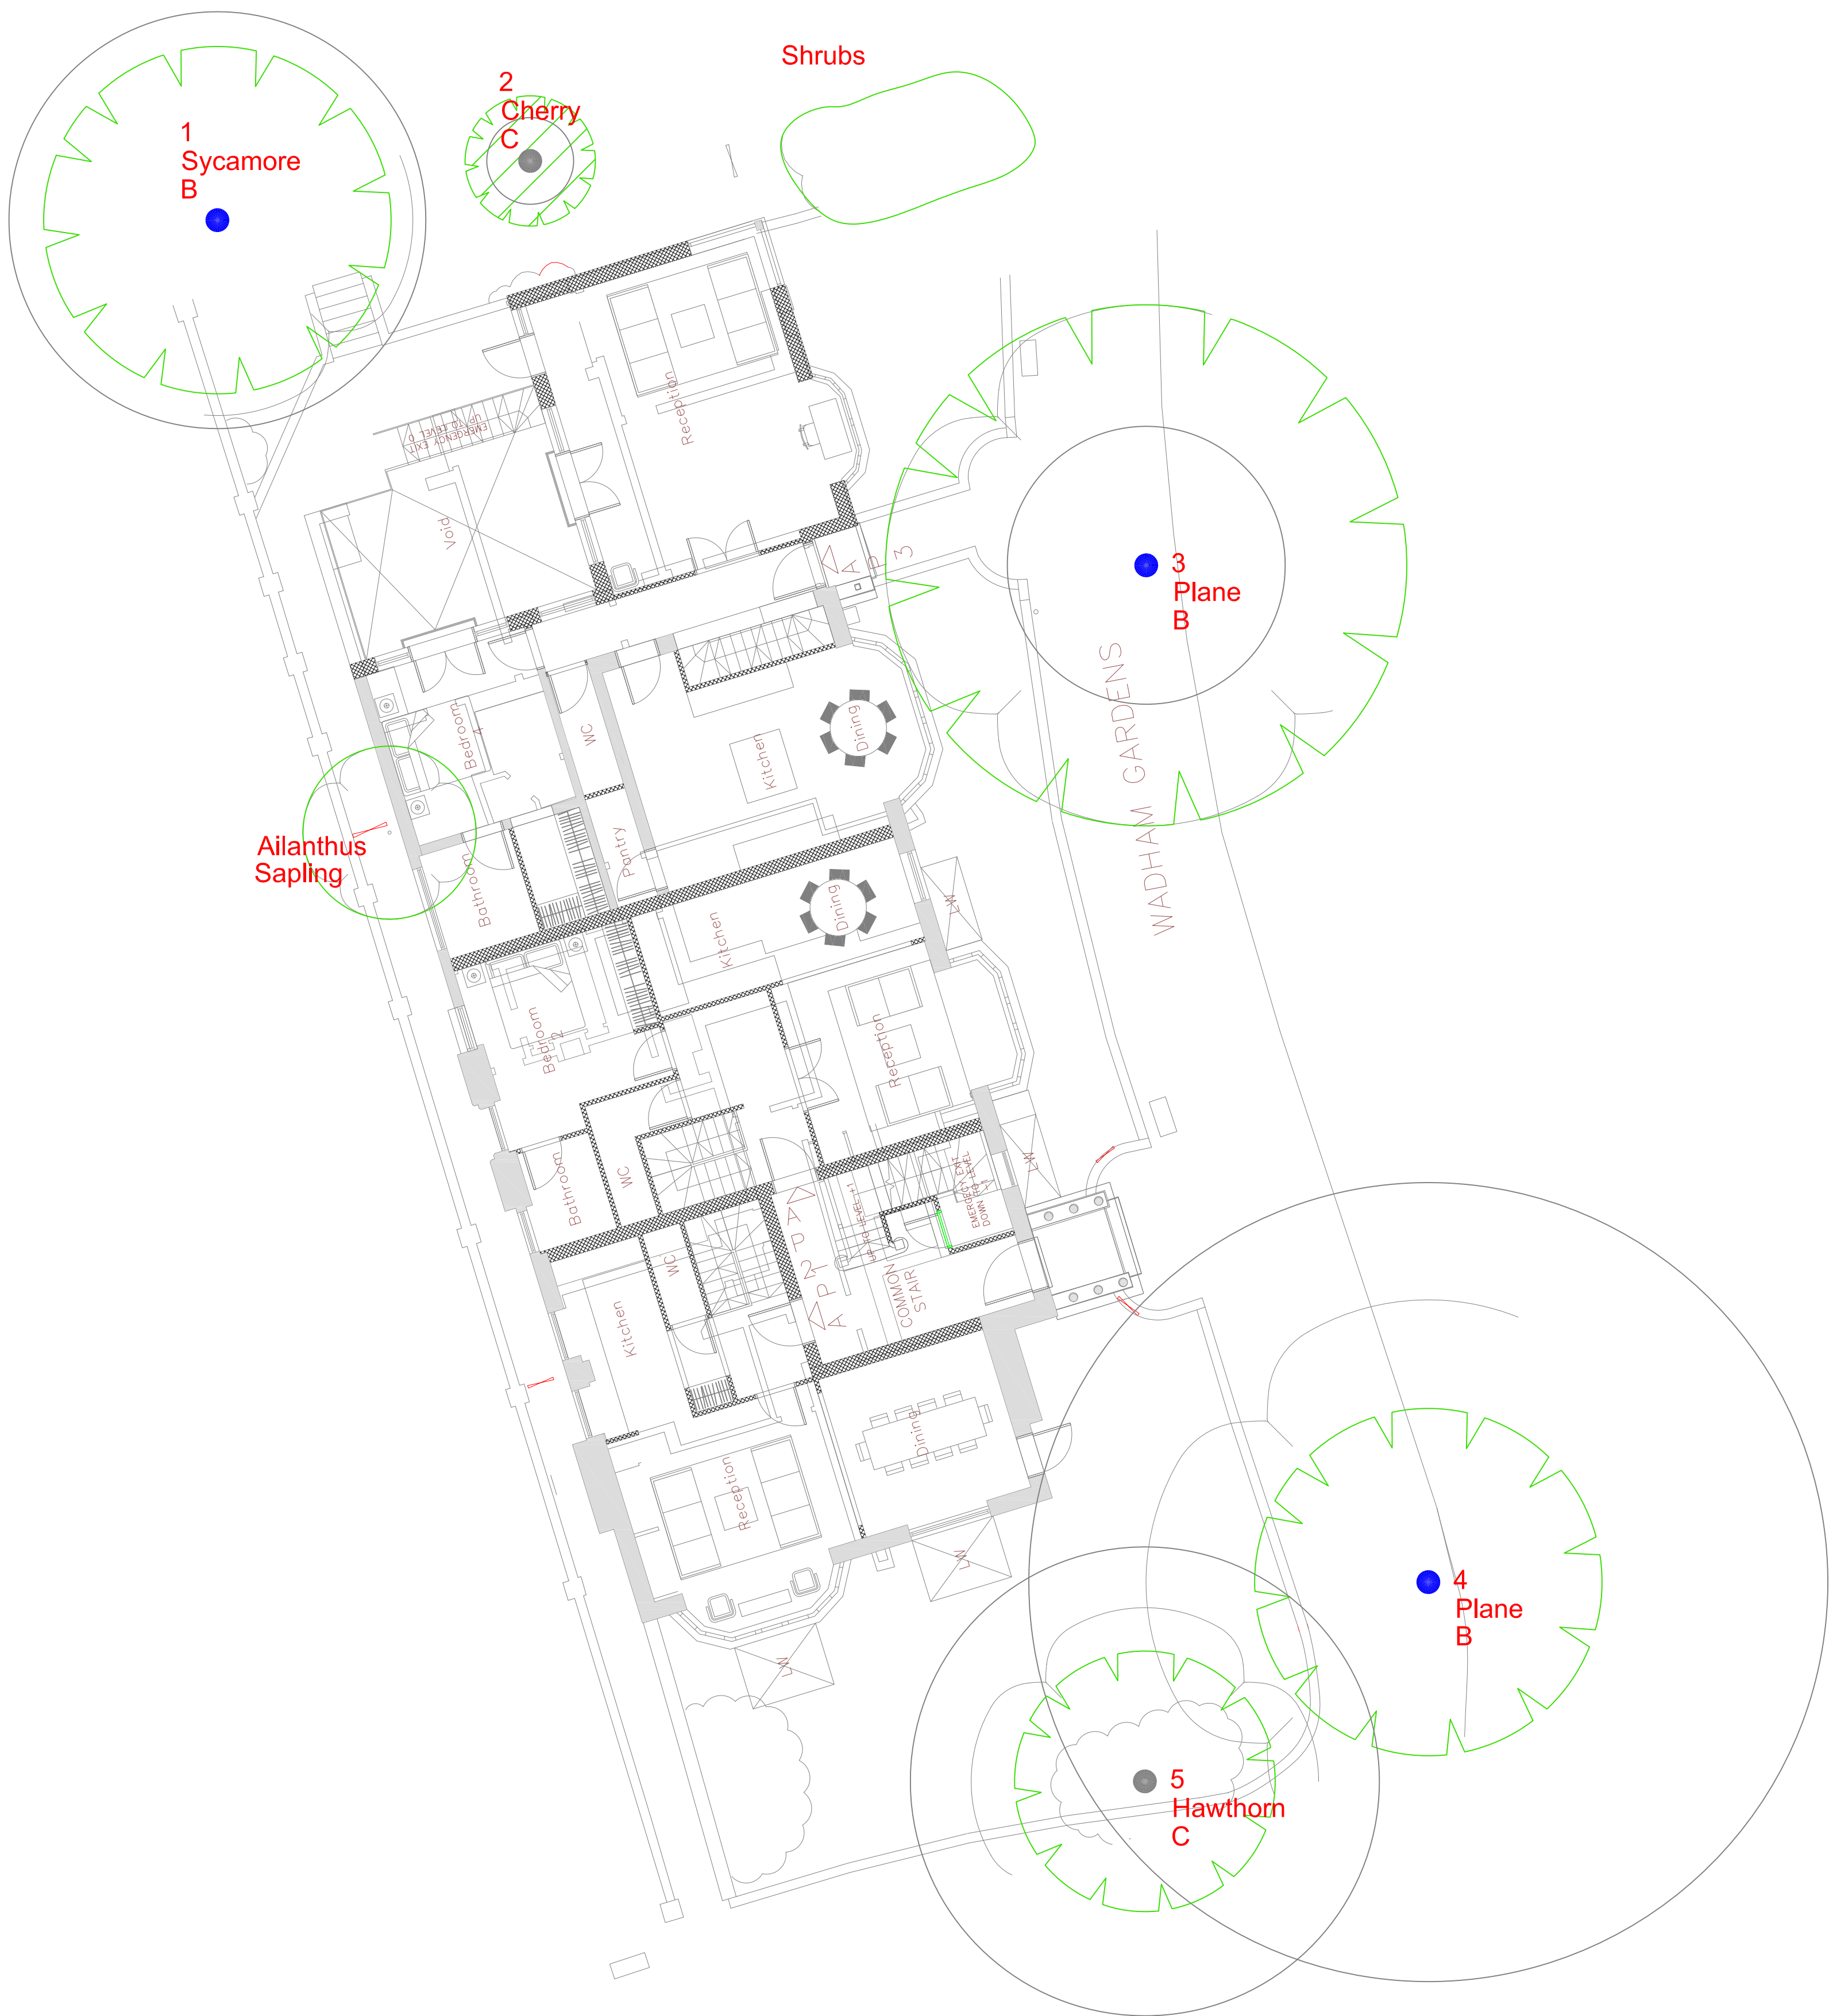

Proposed Ground Floor Plan

NOTE:
This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No decay detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.

Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.

Root Protection Areas (RPA) are derived from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree base).

Landmark Trees
20 Broadwick Street, London, W1F 8HT
Tel: 0207 851 4544 Mobile: 07812 989528
e-mail: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk

Site: 1 Wadham Gardens 1:100@ A1
Drawing Title: Arboricultural Impacts Assessment August 2015

Key:

- Category A High Quality
- Category B Moderate Quality
- Category C Low Quality
- Category U Trees Unsuitable for Retention

Category

- Crown Spread
- Tree Number
- Species
- Category
- Tree Position Approximate (not shown on original survey)

Root Protection Area