
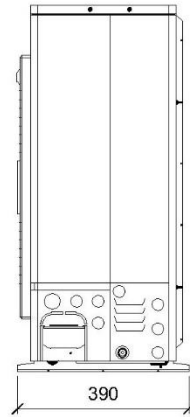
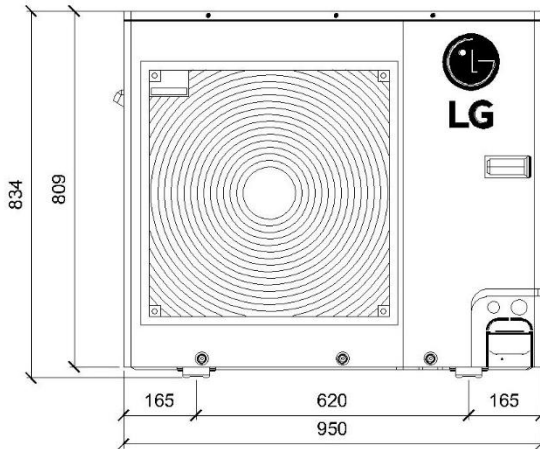


MULTI V S HEAT PUMP – SINGLE PHASE

OUTDOOR UNIT – ARUN050GSL0

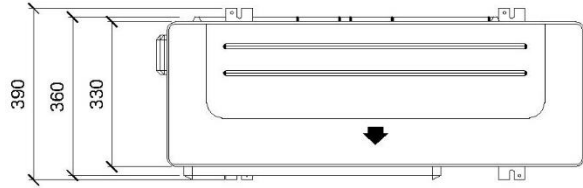

Capacity (rated)	Cooling	kW	14.0
	Heating	kW	15.0
Input (rated)	Cooling	kW	3.78
	Heating	kW	3.75
EER			3.70
COP			4.0
Power Factor	Rated		0.93
Casing Colour			Warm Grey
Heat Exchanger			Ocean Black Fin
Compressor	Type		BLDC Inverter Twin Rotary
	Piston Displacement cm ³ /rev		44
	Number of Revolution rev/min		3600
	Motor Output	W	4000
	Starting Method		DC Inverter Starting
	Oil Type		FVC68D (PVE)
Fan	Type		Axial Flow Fan
	Motor Output x Number W		124 x 1
	Air Flow Rate (High)	m ³ /min	60
		ft ³ /min	2119
	Drive		DC INVERTER
	Discharge	Side/Top	Side
Pipe connections	Liquid	mm (inch)	∅9.52 (3/8)
	Gas	mm (inch)	∅15.88 (5/8)
Dimensions (W x H x D)	mm		950 x 834 x 330
	inch		37-13/32 x 32-27/32 x 13
Net Weight		kg	73
Sound Pressure Level	Cooling	dB(A)	52
	Heating	dB(A)	58
Sound Power Level		dB(A)	68
Protection Devices	High pressure pro-tection		High pressure sensor
	Compressor / Fan		Over-heat protection / Fan driver overload protector
	Inverter		Over-heat protection / Over-current protection
Communication cable			2C x 1.0 -1.5
Refrigerant	Refrigerant name		R410A
	Precharged amount	kg	2.4
	GWP		2087.5
	t-CO2 eq		5.0
	Control		Electronic expansion valve
Refrigerant Oil	Type		FVC68D (FVE)
	Charge	cc	1300
Power Supply	V, ∅, Hz		220-240, 1, 50
			220, 1, 60
Maximum Running Current	A		27.5
Maximum Circuit Breaker Rating	dB(A)		30
Number of maximum connectable indoor units			10