







3W silver version

## LOW LIGHT LEVEL, WALL MOUNTED LUMINAIRES

IP66 IK10++ CE TC-S LED

### SPECIFICATION



- Graphite full polyester powder finish. Silver option
- White polyester powder coated internal gear tray/reflector
- Strong die-cast LM2 aluminium body
- One piece injection moulded UV stabilised polycarbonate cover
- Compact fluorescent or LED lamp sources
- Fitted with 4000K lamp or LEDs

### LED CHARACTERISTICS

|          |            |                |                      |  |
|----------|------------|----------------|----------------------|--|
| Ra<br>80 | °K<br>4000 | L70/B10<br>60K | LL/CW<br><b>60.6</b> |  |
| P/U<br>P | %<br>80    | R/Rx<br>R      | PF<br>0.5            |  |

For LED characteristics explanation see [www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

### DIMENSIONS

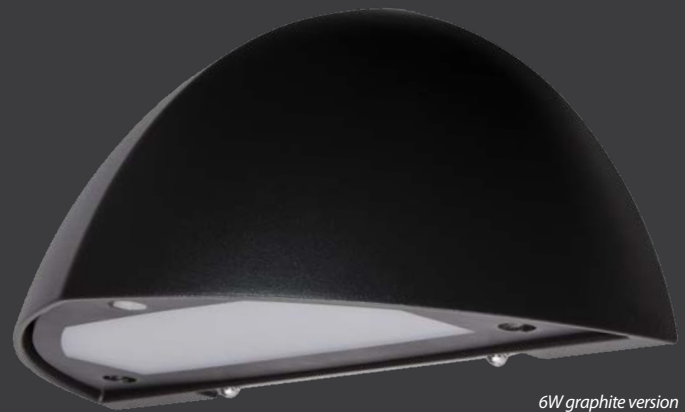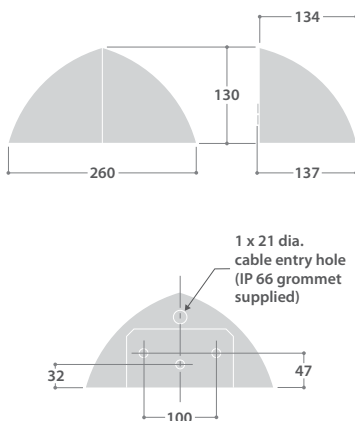

6W graphite version

### RANGE

|              | LAMP     | CAT. No.   | APPROX. kg     |            |
|--------------|----------|------------|----------------|------------|
| MAINS        | 3W LED   | RL 13543L  | 1.3            |            |
|              | 6W LED   | RL 16607L  | 1.5            |            |
| EMERGENCY    | LAMP     | MAINTAINED | NON MAINTAINED | APPROX. kg |
|              | 5W TC-S  |            | ERL 13542      | 1.3        |
| AUTOTEST     | 3W LED ▲ | TRL 13543L |                | 1.3        |
|              | 6W LED   | TRL 16607L | TRL16608       | 1.5        |
| SCANLIGHT AT | 3W LED ▲ | DRL 13543L |                | 1.3        |
|              | 6W LED   | DRL 16607L | DRL16608       | 1.5        |

CIRCUIT TYPE - L - non-dimming (LED)

SILVER OPTION - add suffix SV3 e.g. RL 13543LSV3 etc.

▲ Can be wired during installation for maintained or non-maintained operation

### ACCESSORY

| DESCRIPTION  | CAT. No. | APPROX. kg |
|--|----------|------------|
| Wall mounting kit for 20mm conduit (side entry only) | RL 15419 | 0.4        |

SILVER OPTION - add suffix SV3 e.g. RL 15419SV3 etc.

