
4.10 Classic General Arrangement

4.10.1 Classic Vertical Section Standard Bottom Rail

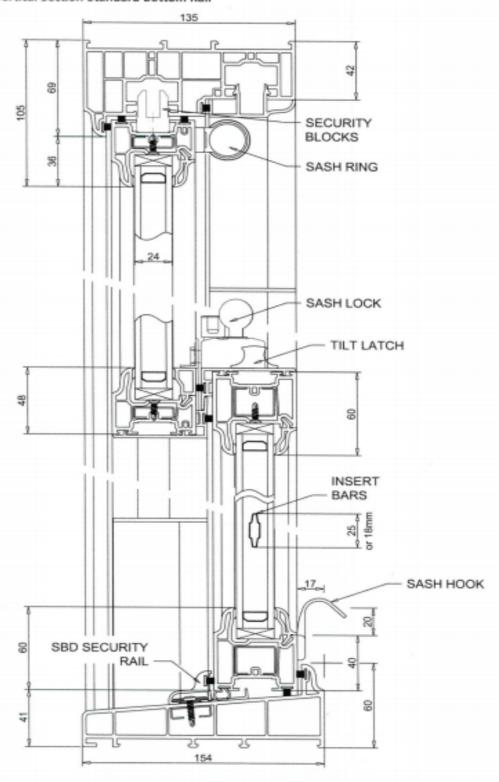

Section Contents

- Classic Vertical Sliding Sash Components
- 4.8 Classic Glazing Options and Window Energy Ratings
- 4.9 Classic Colours
- Classic General Arrangement 4.10
- Classic Parameters 4.11

4.7 Classic Vertical Sliding Sash Components (VL)

PVCU Siding Sash windows are supplied with a small sash over a large sash to give equal glass sightlines. All opening lights slide vertically within the mainframe and can also be tilted backwards to allow access to the external surface for cleaning. Where required sashes can be fixed in position. All glazing is secured by internally fitted glazing beads.



Instead of traditional cords and weights to act as a counterbalance, sashes are fitted with spiral balances, which are pre-tensioned to make

Finger Latch Knobs

Finger latch knobs on the sashes operate the tilt in facility. On the top sash they are hidden from view and are accessible when the sash is lowered 80mm to the travel restrictor.





Bottom sash finger latch knobs.

Top sash finger latch knobs



Option to add equal glass heights to further improve aesthetics




Mitred welded profiles provide strength and durability



48mm external meeting rail



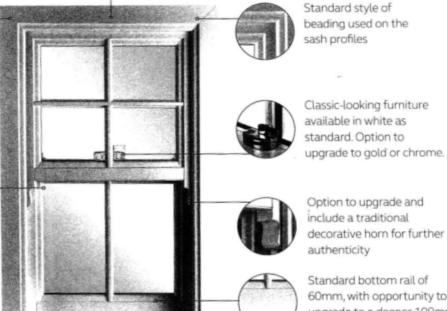

60mm, with opportunity to upgrade to a deeper 100mm rail (as pictured) to replicate original Victorian designs

Standard bottom rail of

Option to upgrade and include a traditional decorative horn for further

authenticity

Energy rated 'A' as standard for modern energy efficiency levels. Option to upgrade to A+ for increased solar gain and even clearer panes.

