



Appendix D – Garden Light Fittings

13.1 EGL01 - Floor recessed light fittings to access and path, see drawing AP_270.

From e.g. <http://www.iguzzini.com/bm38/>

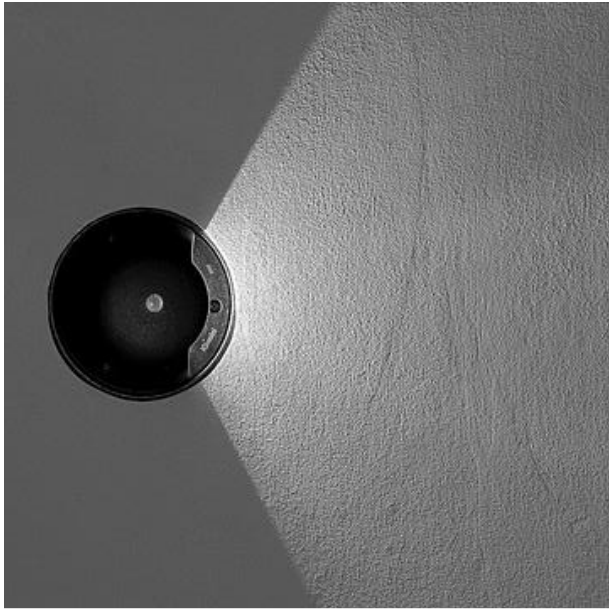


Light Up / ballage
BM38



- 3W 400lm - light source values
- 4.5W 24lm - system values
- Luminous Efficiency (system value): 5lm/W
- Neutral 4000K CRI 80
- Electronic Control gear included
- Optic: ground level lighting from one side
- Adjustability: fixed
- Material: stainless steel
- Size (mm): ø148x215, Weight (kg): 2.20
- Environment: Outdoor

04 Black



Technical Specifications

IK10 IP67 80°C


5000 h

CE ENEC ETL

A++

13.2 EGL02 – Floor recessed light fittings to signage, see drawing AP_270

From e.g. <http://www.iguzzini.com/e122/>

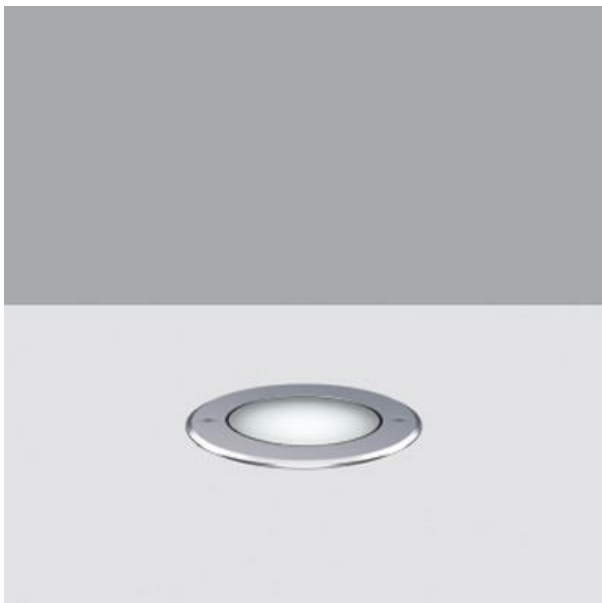

Light Up / Earth
E122



Now you can immediately see the light distribution of the product



- 6.7W 750lm - light source values
- 9W 60lm - system values
- Luminous Efficiency (system value): 6lm/W
- Neutral 4000K CRI 80
- Electronic Control gear included
- Optic: D - Diffused light
- Adjustability: fixed
- Material: stainless steel
- Size (mm): ø144x175, Weight (kg): 1.63
- Environment: indoor/outdoor

x3 Steel

Technical Specifications

IK10 IP68

5000 h

CE ENEC ETL

Complete immersion for limited periods, not suitable for use in swimming pools or fountains.

13.3 EWL01 – External wall light to WC's, see drawing AP_270

Option 1. From e.g Delta Light: <https://www.deltalight.com/en/products/detail/mono-ii-down-up-led-930-223-53-812-930>

MONO II DOWN-UP LED 930 in Dark Grey 223 53 812 930 N

Colour temp: Warm White (+3000k)

LED Technics (Luminaire) 1259 lm // 16 W // 77lm/W

With movement detector, e.g. 180° PIR 2000W PIR Light Controller (ref. SLB2300G BLK).

Black plastic controller with 12m detection range. IP55, 148Hx67Wx89Lmm, 240V, 2300W max.

<http://www.mr-resistor.co.uk/item.aspx?i=15353>



END

Date _____

Name _____

Client _____

Project name _____



Quote# _____

Type/Quantity _____

04/09/2019 12:39:24

MONO II DOWN-UP LED 930
223 53 812 930

[Weblink](#)



Available colors: ALU GREY (223 53 812 930 A)
 DARK GREY (223 53 812 930 N)

NONADJUSTABLE
 INCL.2 x LED 7,1W / CRI>90 / 3000K / 774lm
 INCL.2 x LENS
 INCL.LED POWER SUPPLY 350 mA-DC

LED Technics: Light source: 1548 lm // 14 W // 116 lm/W
 Luminaire: 1259 lm // 16 W // 77 lm/W

100-240V / 50-60Hz

Class: II

Weight: 0.7 KG
 Protection level: IP54
 Minimum distance: n.a.

For detailed installation instructions, please consult the manual. [223 53 812_XXX_HAND.pdf](#)