

# Acoustic Consultancy Report

97981/3/1/2

Background Noise Survey

## Report Prepared For

Complete Engineering Group Ltd  
32 Jamestown Road  
06 December 2019

## Report Author

A handwritten signature in black ink, appearing to read 'S. Shapley', with a long horizontal stroke extending to the left.

Sam Shapley BSc (Hons) AMIOA (D)

Telephone  
0118 918 6460  
Facsimile  
0118 918 6480

[enquiries@lcpacoustics.co.uk](mailto:enquiries@lcpacoustics.co.uk)  
[www.lcpacoustics.co.uk](http://www.lcpacoustics.co.uk)

**LCP**  
Riverside House  
3 Winnersh Fields  
Gazelle Close  
Winnersh  
Wokingham  
RG41 5QS

**A division of Caice  
Acoustic Air Movement Ltd.**

**Company Registration Number**  
2790667  
**VAT Registration Number**  
GB614683632

## Contents

i)	Executive Summary .....	3
ii)	Document History .....	3
1	Introduction .....	4
2	Survey .....	4
2.1	Site Description .....	4
2.2	Receiver Location .....	4
2.3	Local Noise Climate .....	4
2.4	Measurements .....	4
2.5	Measurement Results .....	5
3	Evaluation of Design Criteria .....	5
3.1	Residential Design Criterion .....	5
3.1.1	BS4142:2014 .....	5
3.1.2	World Health Organisation Night Noise Guidelines for Europe (2009) .....	6
3.1.3	World Health Organisation (WHO) Guidelines for Community Noise (1999) .....	6
3.1.4	BS8233:2014 .....	6
3.1.5	Local Authority Requirements.....	7
3.1.6	Recommended Residential Design Rating Level .....	7
3.2	Design Rating Levels .....	8
4	Conclusion .....	8
	Appendix A: Site Plan.....	9
	Appendix B: Measurement Data .....	10
	Appendix C: Glossary .....	11

## i) Executive Summary

New mechanical plant is to be installed at 32 Jamestown Road, in London.

LCP has been commissioned by Complete Engineering Group Ltd to carry out an acoustic environment survey. Once the mechanical design has been finalised an assessment to the potential noise impact of the plant installation on surrounding noise sensitive receptors will be undertaken.

The design criterion is as follows:

Day:	42 dB $L_{Aeq, T}$ at 23m, Holiday Inn London-Camden Lock;
Evening:	40 dB $L_{Aeq, T}$ at 23m, Holiday Inn London-Camden Lock;
Night:	35 dB $L_{Aeq, T}$ at 23m, Holiday Inn London-Camden Lock.
Day:	42 dB $L_{Aeq, T}$ at 15m, residential at 36 Jamestown Road;
Evening:	40 dB $L_{Aeq, T}$ at 15m, residential at 36 Jamestown Road;
Night:	35 dB $L_{Aeq, T}$ at 15m, residential at 36 Jamestown Road.

Any new mechanical plant will be installed to meet the above design criteria.

## ii) Document History

Issue	Date	Issue Details	Issued By
1	6 <sup>th</sup> December 2019	Initial Issue	SS

## 1 Introduction

New mechanical plant is to be installed at 32 Jamestown Road, in London.

LCP has been commissioned by Complete Engineering Group Ltd to carry out an acoustic environment survey. Once the mechanical design has been finalised an assessment to the potential noise impact of the plant installation on surrounding noise sensitive receptors will be undertaken.

The guidance in this report is on the basis that the mechanical plant will be consistently operating over a 24-hour period.

## 2 Survey

### 2.1 Site Description

The site layout together with the measurement position is shown in the drawing contained within Appendix A.

### 2.2 Receiver Location

The site was surveyed to determine the location of the most affected receiver.

The nearest receivers with direct line of sight to the plant area is 15m to the west of the site and 23 to the east of site. Please note these stated distances may change once the plant location has been finalised.

### 2.3 Local Noise Climate

The predominant local noise source was road traffic noise along Jamestown Road.

### 2.4 Measurements

The noise monitoring took place between 29<sup>th</sup> November – 2<sup>nd</sup> December 2019. The measurement period was considered sufficient to establish the representative background sound levels corresponding to the operational period of the plant.

The weather conditions monitored during the survey are shown in the following table.

Table 1: Weather Conditions at Measurement Location

Weather	29 <sup>th</sup> November	30 <sup>th</sup> November	1 <sup>st</sup> December	2 <sup>nd</sup> December
Average Wind Speed	2m/s	3m/s	4m/s	1m/s
Wind Direction	South	West	South-west	South-east
Cloud Cover	50%	75%	75%	50%
Max. Temperature	8°C	7°C	7°C	7°C
Min. Temperature	-2°C	-2°C	0°C	-2°C
Precipitation	None	None	None	None

## 2.5 Measurement Results

The measured statistical broad-band sound pressure levels are shown within Appendix C. The representative background sound level(s) obtained being as follows:

Table 2: Representative background sound levels, dB re  $2 \times 10^{-5}$  Pa

Measurement Position	L <sub>A90</sub> , 15 mins Day*	L <sub>A90</sub> , 15 mins Evening*	L <sub>A90</sub> , 15 mins Night*
MP1	47	45	40

\* Day, Evening and Night periods are defined as between 07:00 - 19:00, 19:00 - 23:00 and 23:00 - 07:00 respectively.

## 3 Evaluation of Design Criteria

### 3.1 Residential Design Criterion

#### 3.1.1 BS4142:2014

BS4142:2014 states that the significance of sound of an industrial and/or commercial nature depends upon both the margin by which the rating level of the specific sound source exceeds the background sound level and the context in which the sound occurs.

Table 3: BS4142 assessment based upon rating level

Difference between background noise and rating levels	Assessment
+ 10 dB	Indication of a significant adverse impact
+ 5 dB	Indication of an adverse impact
0 dB	Indication of low impact

Certain acoustic features can increase the significance of impact. The specific sound level should be corrected if a tone, impulse or other acoustic feature is expected to be present.

Table 4: Corrections for acoustic features, subjective method

Acoustic Feature	Correction, dB		
	Just Perceptible	Clearly Perceptible	Highly Perceptible
Tonality	2	4	6
Impulsivity	3	6	9
Other Characteristics	3		
Intermittency	3		

Typically the acoustic feature correction would not be expected to exceed 10dB.

Where the level of uncertainty could affect the conclusion, take reasonably practicable steps to reduce the level of uncertainty.

### 3.1.2 World Health Organisation Night Noise Guidelines for Europe (2009)

The WHO's document 'Night Noise Guidelines for Europe (NNG)' states the following:

*"...it is recommended that the population should not be exposed to night noise levels greater than 40 dB of  $L_{night, outside}$  during the part of the night when most people are in bed."*

It then goes on to say:

*"An interim target (IT) of 55 dB  $L_{night, outside}$  is recommended in the situations where the achievement of NNG is not feasible in the short run for various reasons."*

As the above guideline values consider the combined level of noise external to a façade (i.e. vehicular traffic, air traffic, building services noise etc, it is recommended that a criterion of 10 dB below these given levels is applied, depending on the particulars of the site in question.

### 3.1.3 World Health Organisation (WHO) Guidelines for Community Noise (1999)

The WHO's 'Guidelines for Community Noise' gives the following relevant noise criteria:

Table 5: Guideline values for community noise, from Guidelines for Community Noise (WHO, 1999)

Specific Environment	$L_{Aeq, T}$ dB	Time Base (hours)	$L_{Amax, fast}$ dB
Outdoor living area (serious annoyance, daytime and evening)	55	16	-
Outdoor living area (moderate annoyance, daytime and evening)	50	16	-
Dwelling, indoors	35	16	-
Inside bedrooms	30	8	45
Outside bedrooms	45	8	60
Outdoors in parkland and conservation areas*	-	-	-

\* Existing quiet outdoor areas should be preserved and the ratio of intruding noise to natural background sound should be kept low

The WHO's 'Guidelines for Community Noise' also gives the following general guidance on the expected sound insulation performance of a façade with a partly open window, it states that:

*"At night, sound pressure levels at the outside facades of the living spaces should not exceed 45 dB  $L_{Aeq}$  and 60 dB  $L_{Amax}$ , so that people may sleep with bedroom windows open. These values have been obtained by assuming that the noise reduction from outside to inside with the window partly open is 15 dB."*

### 3.1.4 BS8233:2014

The criteria offered in BS8233 for residential buildings are largely based on the recommendations made in the Guidelines for Community Noise.

Using the general guidance from above, on the expected sound insulation performance of a façade with a partly open window, the criteria shown in the table below have been adapted from the criteria offered in table 4 of BS8233 in order to obtain acceptable external noise levels.

The noise levels shown should be treated as overall noise levels, i.e., the combination of all existing noise levels at the site, and noise levels from any proposed plant or activity.

Table 6: External ambient noise levels for dwellings, based on BS8233, dB re  $2 \times 10^{-5}$  Pa

Activity	Location	Time period	
		07:00 to 23:00	23:00 to 07:00
Resting	Living Room	50 $L_{Aeq, 16 \text{ hour}}$	-
Dining	Dining Room/area	55 $L_{Aeq, 16 \text{ hour}}$	-
Sleeping (daytime resting)	Bedroom	50 $L_{Aeq, 16 \text{ hour}}$	45 $L_{Aeq, 8 \text{ hour}}$

In addition to the above criteria, BS8233 goes on to say:

*“For traditional external areas that are used for amenity space, such as gardens and patios, it is desirable that the external noise level does not exceed 50  $L_{Aeq, T}$ , with an upper guideline value of 55 dB  $L_{Aeq, T}$  which would be acceptable in noisier environments.”*

The above criteria are in line with the recommendations made in WHO’s ‘Guidelines for Community Noise’.

### 3.1.5 Local Authority Requirements

Camden Development Policies 2010-2025 states the following regarding plant noise:

**Table E: Noise levels from plant and machinery at which planning permission will not be granted**

Noise description and location of measurement	Period	Time	Noise level
Noise at 1 metre external to a sensitive façade	Day, evening and night	0000-2400	5dB(A) <LA90
Noise that has a distinguishable discrete continuous note (whine, hiss, screech, hum) at 1 metre external to a sensitive façade.	Day, evening and night	0000-2400	10dB(A) <LA90
Noise that has distinct impulses (bangs, clicks, clatters, thumps) at 1 metre external to a sensitive façade.	Day, evening and night	0000-2400	10dB(A) <LA90
Noise at 1 metre external to sensitive façade where $LA90 > 60\text{dB}$	Day, evening and night	0000-2400	55dBL $_{Aeq}$

### 3.1.6 Recommended Residential Design Rating Level

On the basis of the above the recommended residential design rating level should therefore be:

## Residential Design Rating Level

Representative  $L_{A90, 15 \text{ mins}}$  - 5 dB

### 3.2 Design Rating Levels

The design levels to be adopted for this project are set out in the table below.

Please note the plant location has not been finalised and therefore the approximate distances stated may change once the report has been updated.

Table 7: Design rating levels, dB re  $2 \times 10^{-5}$  Pa

Receiver Premises	Approximate Distance (m)	Design Level (Day) $L_{Aeq, 12 \text{ hr}}$	Design Level (Evening) $L_{Aeq, 4 \text{ hr}}$	Design Level (Night) $L_{Aeq, 8 \text{ hr}}$
Holiday Inn London-Camden Lock	23	42	40	35
36 Jamestown Road	15	42	40	35

## 4 Conclusion

An environmental noise survey has been undertaken in order to establish the representative background sound levels local to the site generally in accordance with the method contained within BS4142: 2014.

Any new mechanical plant will be installed to meet the above design criteria.




## Appendix A: Site Plan



Approximate measurement position (Latitude & Longitude) 51°32'24.77" N 0°08'46.55" W.

## Appendix B: Measurement Data

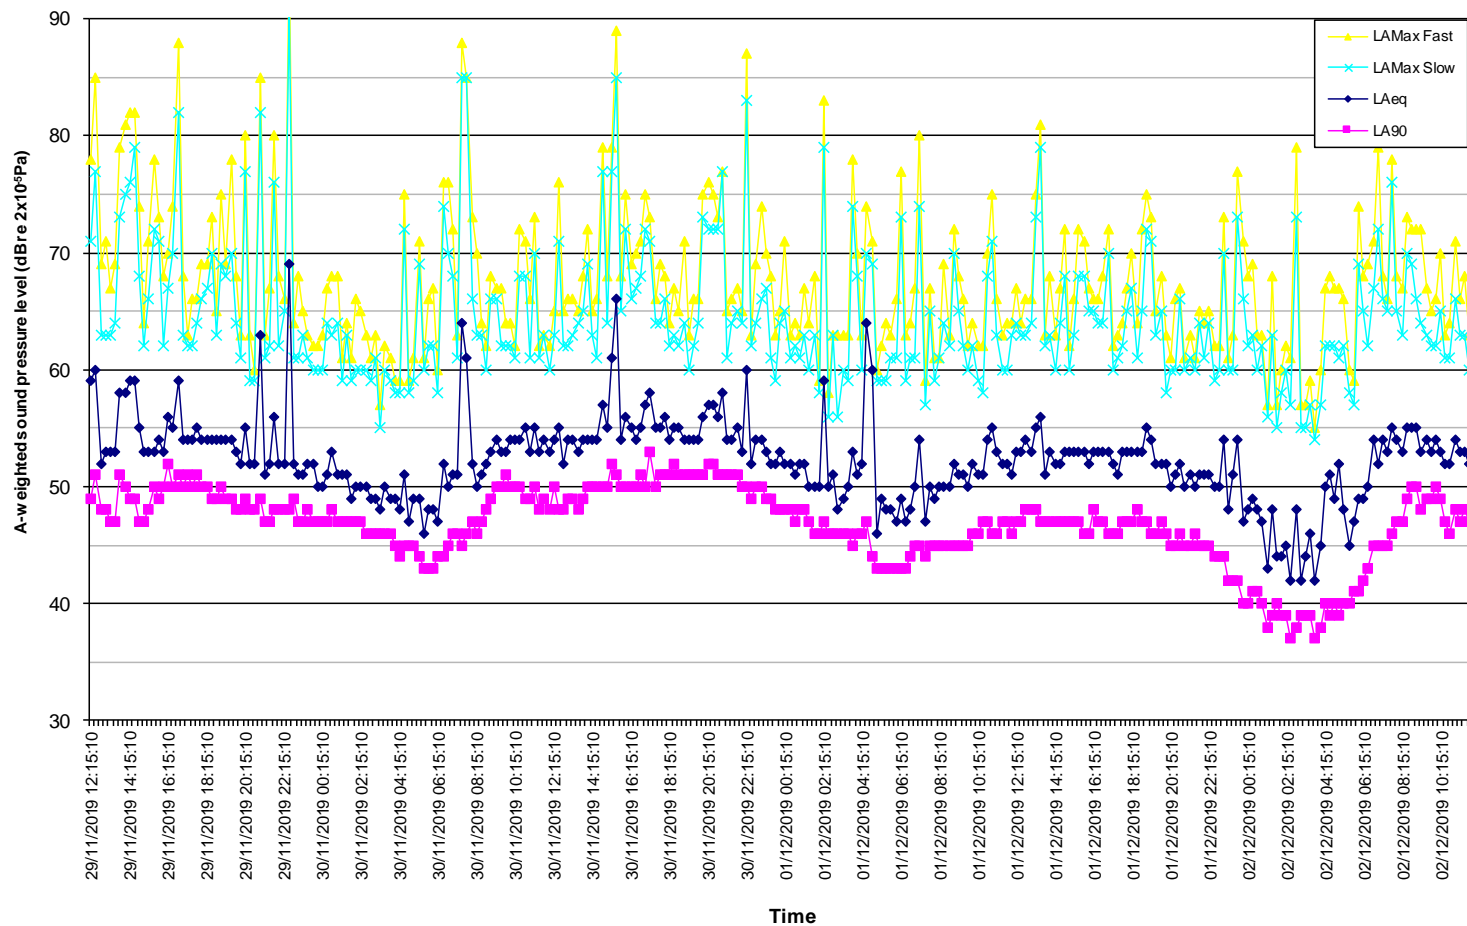

Sound pressure level measurements were obtained using the following instrumentation complying with the Class 1 specification of BS EN 61672:2003

- Svantek 959 Sound Level Meter S/N: 11207
- Svantek pre-amplifier SV12L S/N: 49860 with GRAS microphone capsule 40AE S/N: 215511

Calibration checks were made prior to and after completion of measurements using a Svantek SV30A calibrator, S/N: 10893 complying with Class 1 specification of BS EN 60942:2003, calibration level 114.0 dB @ 1.0 kHz. All acoustic instrumentation carried current manufacturer's certificates of conformance.

## Appendix C: Glossary

The list below details the major acoustical terms and descriptors, with brief definitions:

### 'A' Weighting

Weighting applied to the level in each stated octave band by a specified amount, in order to better represent the response of the human ear. The letter 'A' will follow a descriptor, indicating the value has been 'A' weighted. An 'A' weighted noise level may also be written as dB(A).

### Airborne Noise

Noise transmitted through air.

### Ambient Noise

The total noise level including all 'normally experienced' noise sources.

### dB or Decibel

Literally meaning 'a tenth of a bel', the bel being a unit devised by the Bell Laboratory and named after Alexander Graham Bell. A logarithmically based descriptor to compare a level to a reference level. Decibel arithmetic is not linear, due to the logarithmic base. For example:

30 dB + 30 dB  $\neq$  60 dB

30 dB + 30 dB = 33 dB

### $D_{nTw} + C_{tr}$

The weighted, normalised difference in airborne noise levels measured in a source room (L1) and a receive room (L2) due to a separating partition.

$D$  Is simply  $L1 - L2$ .

$D_{nT}$  Is the normalisation of the measured level difference to the expected (in comparison to the measured) reverberation time in the receiving room.

$D_{nTw}$  Is the weighted and normalised level difference. This value is the result of applying a known octave band weighting curve to the measured result.

**C<sub>tr</sub>**

Is a correction factor applied to the  $D_{nTw}$  to account for the known effects of particular types of noise, such as loud stereo music or traffic noise.

**Frequency (Hz)**

Measured in Hertz (after Heinrich Hertz), and represents the number of cycles per second of a sound or tone.

**Insertion Loss, dB**

The amount of sound reduction offered by an attenuator or louvre once placed in the path of a noise level.

**L<sub>A90, T</sub>**

The 'A' weighted noise level exceeded for 90% of the time period T, described or measured. The '90' can be substituted for any value between 1 and 99 to indicate the noise level exceeded for the corresponding percentage of time described or measured.

**L<sub>Aeq, T</sub>**

The 'A' weighted 'equivalent' noise level, or the average noise level over the time period T, described or measured.

**L<sub>Amax</sub>**

The 'A' weighted maximum measured noise level. Can be measured with a 'slow' (1 sec) or 'fast' (0.125 sec) time weighting.

**L<sub>Amin</sub>**

The 'A' weighted minimum measured noise level.

**NR**

Noise Rating (NR) level. A frequency dependent system of noise level curves developed by the International Organisation for Standardisation (ISO). NR is used to categorise and determine the acceptable indoor environment in terms of hearing preservation, speech communication and annoyance in any given application as a single figure level. The US predominantly uses the Noise Criterion (NC) system.

**Octave**

The interval between a frequency in Hz (f) and either half or double that frequency (0.5f or 2f).

**Pa**

Pascals, the SI unit to describe pressure, after physicist Blaise Pascal.

### Reverberation Time, $T_{mf}$ , RT60, RT30 or RT20

The time taken in seconds for a sound to diminish within a room by 1,000 times its original level, corresponding to a drop in sound pressure of 60 dB. When taking field measurements and where background noise levels are high, the units RT20 or RT30 are used (measuring drops of 20 or 30 dB respectively). Sometimes given as a mid-frequency reverberation time,  $T_{mf}$  which is the average of reverberation time values at 500Hz, 1kHz and 2kHz.

### $R_w$

The sound reduction value(s) of a constructional element such as a door, as measured in a laboratory, with a known octave band weighting curve applied to the result.

### Sound Power Level

A noise level obtained by calculation from measurement data, given at the face of an item of plant or machinery. Referenced to  $10^{-12}$  W or 1pW.

### Sound Pressure Level

A noise level measured or given at a distance from a source or a number of sources. Referenced to  $2 \times 10^{-5}$  Pa.

### Subjective Effect of Changes in Sound Pressure Level

The table below details the subjective effects of variations in sound pressures (adapted from Bies and Hansen).

Difference between background noise and rating levels	Increase in ambient noise level in 'real terms'	Change in apparent loudness
+ 10 dB	+ 10 dB	Twice as loud
+ 5 dB	+ 6 dB	Clearly noticeable
0 dB	+ 3 dB	Just perceptible
-10 dB	0 dB	No change

### W

Watts, the SI unit to describe power, after engineer James Watt.