

St Giles

L11 - Inground 5 RGBW

Historic Facade



Description:
Stainless Steel Uplighter 5x RGBW LED . Fitted with thermal-shock resistant tempered glass. Complete with integral DMX driver


Details:
Channels: 4Ch
Lumens: R-380lm G-720lm B-120lm W-800lm
Active PF: 0.91
Housing: Stainless Steel
LED COB Options: RGBW
Operating Temp: -20 °C to +50 °C
IP Rating: IP67
Flicker Free Operation
Intelligent Internal Thermal Management




SS




.ies and .ldt files are available

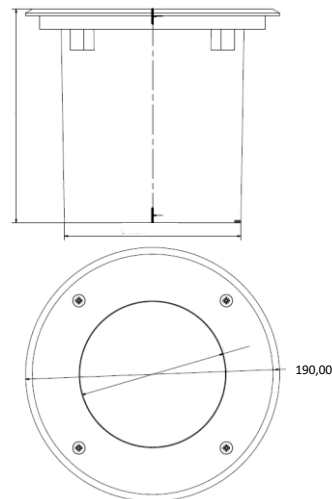

Cone Diagram

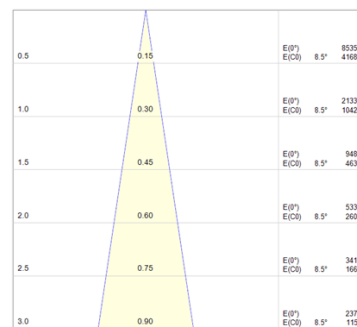

Polar Curve

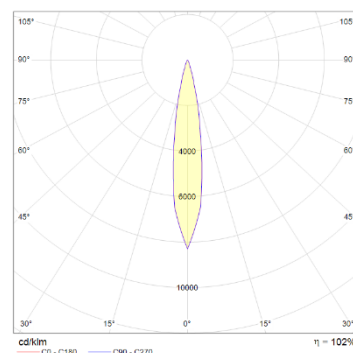

Model	Type	No. LED	System Power	Lumen	Beam Angle
LPA-ING5-RGBW	LED	5	25W	2020lm	10°
CRI	CCT	Voltage	Material	Cut-out	IP rating
-	RGBW	100-240VAC 47-63Hz	Stainless Steel		IP67