



## Easy Kap Ø80 Fixed Optic Flood

03.4298.B1 - White

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

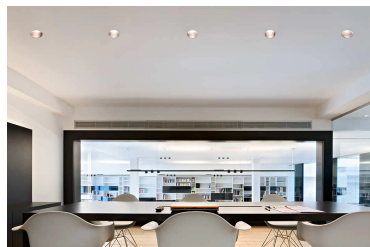


## Main specifications

Number of heads	1	Net lumen (lm)	688 lm
Lamp categories	LED	Mountings	Ceiling recessed
Power (W)	9.2W	Environments	Indoor
CCT	2700K		
CRI	90		

## Optical

Lighting type	Direct
Light Distributions	Symmetric
Optical type	Flood
Beam Angle (°)	50
Beam Angle C90-270 (°)	50



Luminous flux luminaire  
688 lm (EXTREME CUT OFF)

Beam Angle: 50°


h(m)	E(lx)	D(m)
1	1066	0.93
2	266	1.86
3	118	2.79
4	67	3.72
5	43	4.65



## Electrical

Voltage (V)	18.40	Emergency	Without
Lamp Holder	LED		
Dimmable	Yes		
Driver	Remote		
Transformer Type	Electronic, Electronic dimmable, Electronic dimmable 1- 10V, Electronic dimmable DALI		

## Certification / Marking



## Physical

Color	White
Orientations	Fixed
Recessed Depth	91
Weight	0.24
Spot Diameter	80

## Note

Diffusing lens included

# Easy Kap Ø80 Fixed Optic Flood



---

Constant Current Power Supply for  
LED. 6W-100/14W-240V  
60.8880

---

Constant Current Power Supply for  
LED. 32W  
60.8534

---

Continuous current power supply of  
25W  
60.8533



---

Constant Current Power Supply for  
LED. 10-20W  
60.8847