

## Kap 80 Surface Round Optic Flood

03.6041.14 - Black/Gold

Luminaire for mounting on the ceiling with LED light source. Power source 110/240V - 50/60Hz incorporated into luminaire body.




### Main specifications

Number of heads	1	Net lumen (lm)	660 lm
Lamp categories	LED	Mountings	Ceiling surface
Power (W)	9.2W	Environments	Indoor
CCT	2700K		
CRI	90		

### Optical

Lighting type	Direct
Light Distributions	Symmetric
Optical type	Flood
Beam Angle (°)	45
Beam Angle C90-270 (°)	45



Beam Angle:	45°	
h(m)	E(lx)	D(m)
1	1206	0.83
2	302	1.66
3	134	2.48
4	75	3.31
5	48	4.14




Luminous flux luminaire  
660 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Transformer Type	Electronic
Voltage (V)	18.20	Emergency	Without
Lamp Holder	LED		
Dimmable	No		
Driver	Integrated		

### Physical

Color	Black/Gold
Orientations	Fixed
Weight	0.45

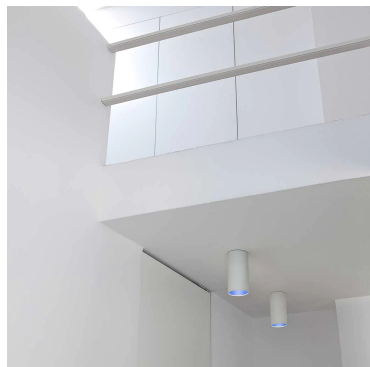

### Certification / Marking

