

THE RUNNING MAGNET 2.0 RECESSED FEED UNIT PROFILE

Mounting

Ceiling recessed, Wall recessed

Voltage (V)

24

Notes

The Recessed version can only be installed on 12.5 mm thick plasterboard surfaces. Covers included with the power feed profiles. 90° corners available in the same plane (symmetrical element for left and right corners), symmetrical 90° inner and outer corners in different planes. For connection to the driver. Permanent or adjustable fastening kits available (optional). The fastening kits for the roof permit installing without using aluminium fastening profiles. Recommended for installations where the Running Magnet 2.0 cannot be installed before the suspended plasterboard ceiling (use 4 units).



PHYSICAL

Track length

3000



A FLEXI SMALL RECESSED TRACK


The Running Magnet 2.0 Recessed Feed Unit Profile

designed by FLOS Architectural

Electromechanical track for recessed installation in plasterboard ceilings and walls. Linear tracks available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

06.1642.14

Black

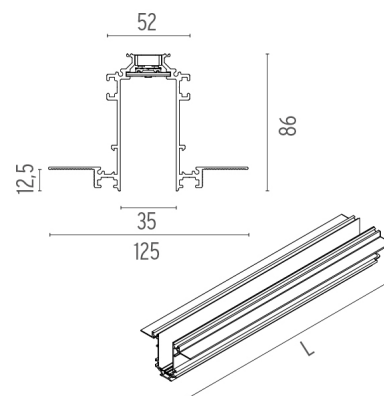

The Running Magnet 2.0 Recessed Feed Unit Profile . Accessories

Power Supply



60.9352

LED power supply source for remote installation in 24V/200W electric control panel

To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.

maximum length of 15 mm2
secondary conductor: 2.5




The Running Magnet 2.0 Recessed Feed Unit Profile
designed by FLOS Architectural


Electromechanical track for recessed installation in plasterboard ceilings and walls. Linear tracks available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

06.1642.14

Black

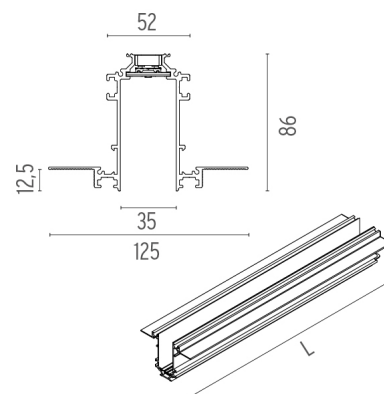

Mounting



08.8866.14

Fixed Ceiling Kit. 2 Unit kit

Fixed Ceiling Kit (optional)

08.8867.14

Adjustable Ceiling Kit. 2 Unit kit

Adjustable Ceiling Kit (optional)

The Running Magnet 2.0 Recessed Feed Unit Profile . Accessories

Electrical



● 08.0622.14

● 08.0622.40

FLOS Smart Control bluetooth gateway Dali

DALI Bluetooth FLOS SMART CONTROL Gateway Necessary to control the system via APP. Use one unit for every line of profiles and for every 63 luminaires. Use with DALI version luminaires.<nextline>



The Running Magnet 2.0 Recessed Feed Unit Profile

designed by FLOS Architectural

Electromechanical track for recessed installation in plasterboard ceilings and walls. Linear tracks available in two versions: power feed profiles for connecting to a driver, and intermediate profiles.

● 06.1642.14

Black

