
## Soft Landscape Legend Proposed site boundary Existing trees to be removed EXISTING VEHICLE BARRIER Existing trees to be retained and protected during construction +28 20 Proposed tree planting within soft landscape. See detail on Sheet 3 Proposed conifer planting. See detail on Sheet 3 Proposed shrub planting to receive 75mm bark mulch after planting EXISTING CONCRETE operations FLAGS TO FOOTPATH Pebbles planted with Proposed shrub planting within 10 No. Erigeron karvinskianus 50% +28.26 pebbles and graveled areas 10 No. Euphorbia myrsinites 50% Pebbles planted with Proposed mixed herbaceous 20 No. Erigeron karvinskianus 50% planting to be planted in groups of 20 No. Euphorbia myrsinites 50% 3-5no. of each species, and as — 9 No. Hebe pinguifolia 'Pagei' above Proposed grass areas to receive good quality amenity grass turves 3 No. Malus sylvestris\_ laid in line with good horticultural practices Proposed area to be 38mm unnannan markan manan manan man Pre-Grown Golpla Grass Paver to be laid to suppliers specification as supplied by geosyn.co.uk Proposed root director to be RD1050 medium modular root barrier system 3 No. Pinus pinea Proposed climbing plants to be 1 No. Catalpa bignonioides trained up adjacent wall with galvanised wires and hook set 250mm apart with support canes removed prior to planting Proposed hedge planting to be planted in a double staggered row Shady Perennials\_ 5 No. Adiantum pedatum 25% 300mm apart and at 500mm 5 No. Asplenium scolopendrium 25% centres in each row. To be 5 No. Geranium phaeum 'Lily Lovell' 25% maintained at 1m height 5 No. Viola odorata 25% En managen and my franches and managen and my En n n n n n n n **Ecology enhancements** Proposed bat box to be schwegler Shady Perennials 2FN or similar 7 No. Adiantum pedatum 25% Water Butt 7 No. Asplenium scolopendrium 25% Proposed bird box to be schwegler 7 No. Geranium phaeum 'Lily Lovell' 25% 1B or similar

Proposed insect house to be a ladybird tower

Proposed swift box to be Schwegler 17A or similar

Proposed sparrow terrace to be schwegler 1SP or similar

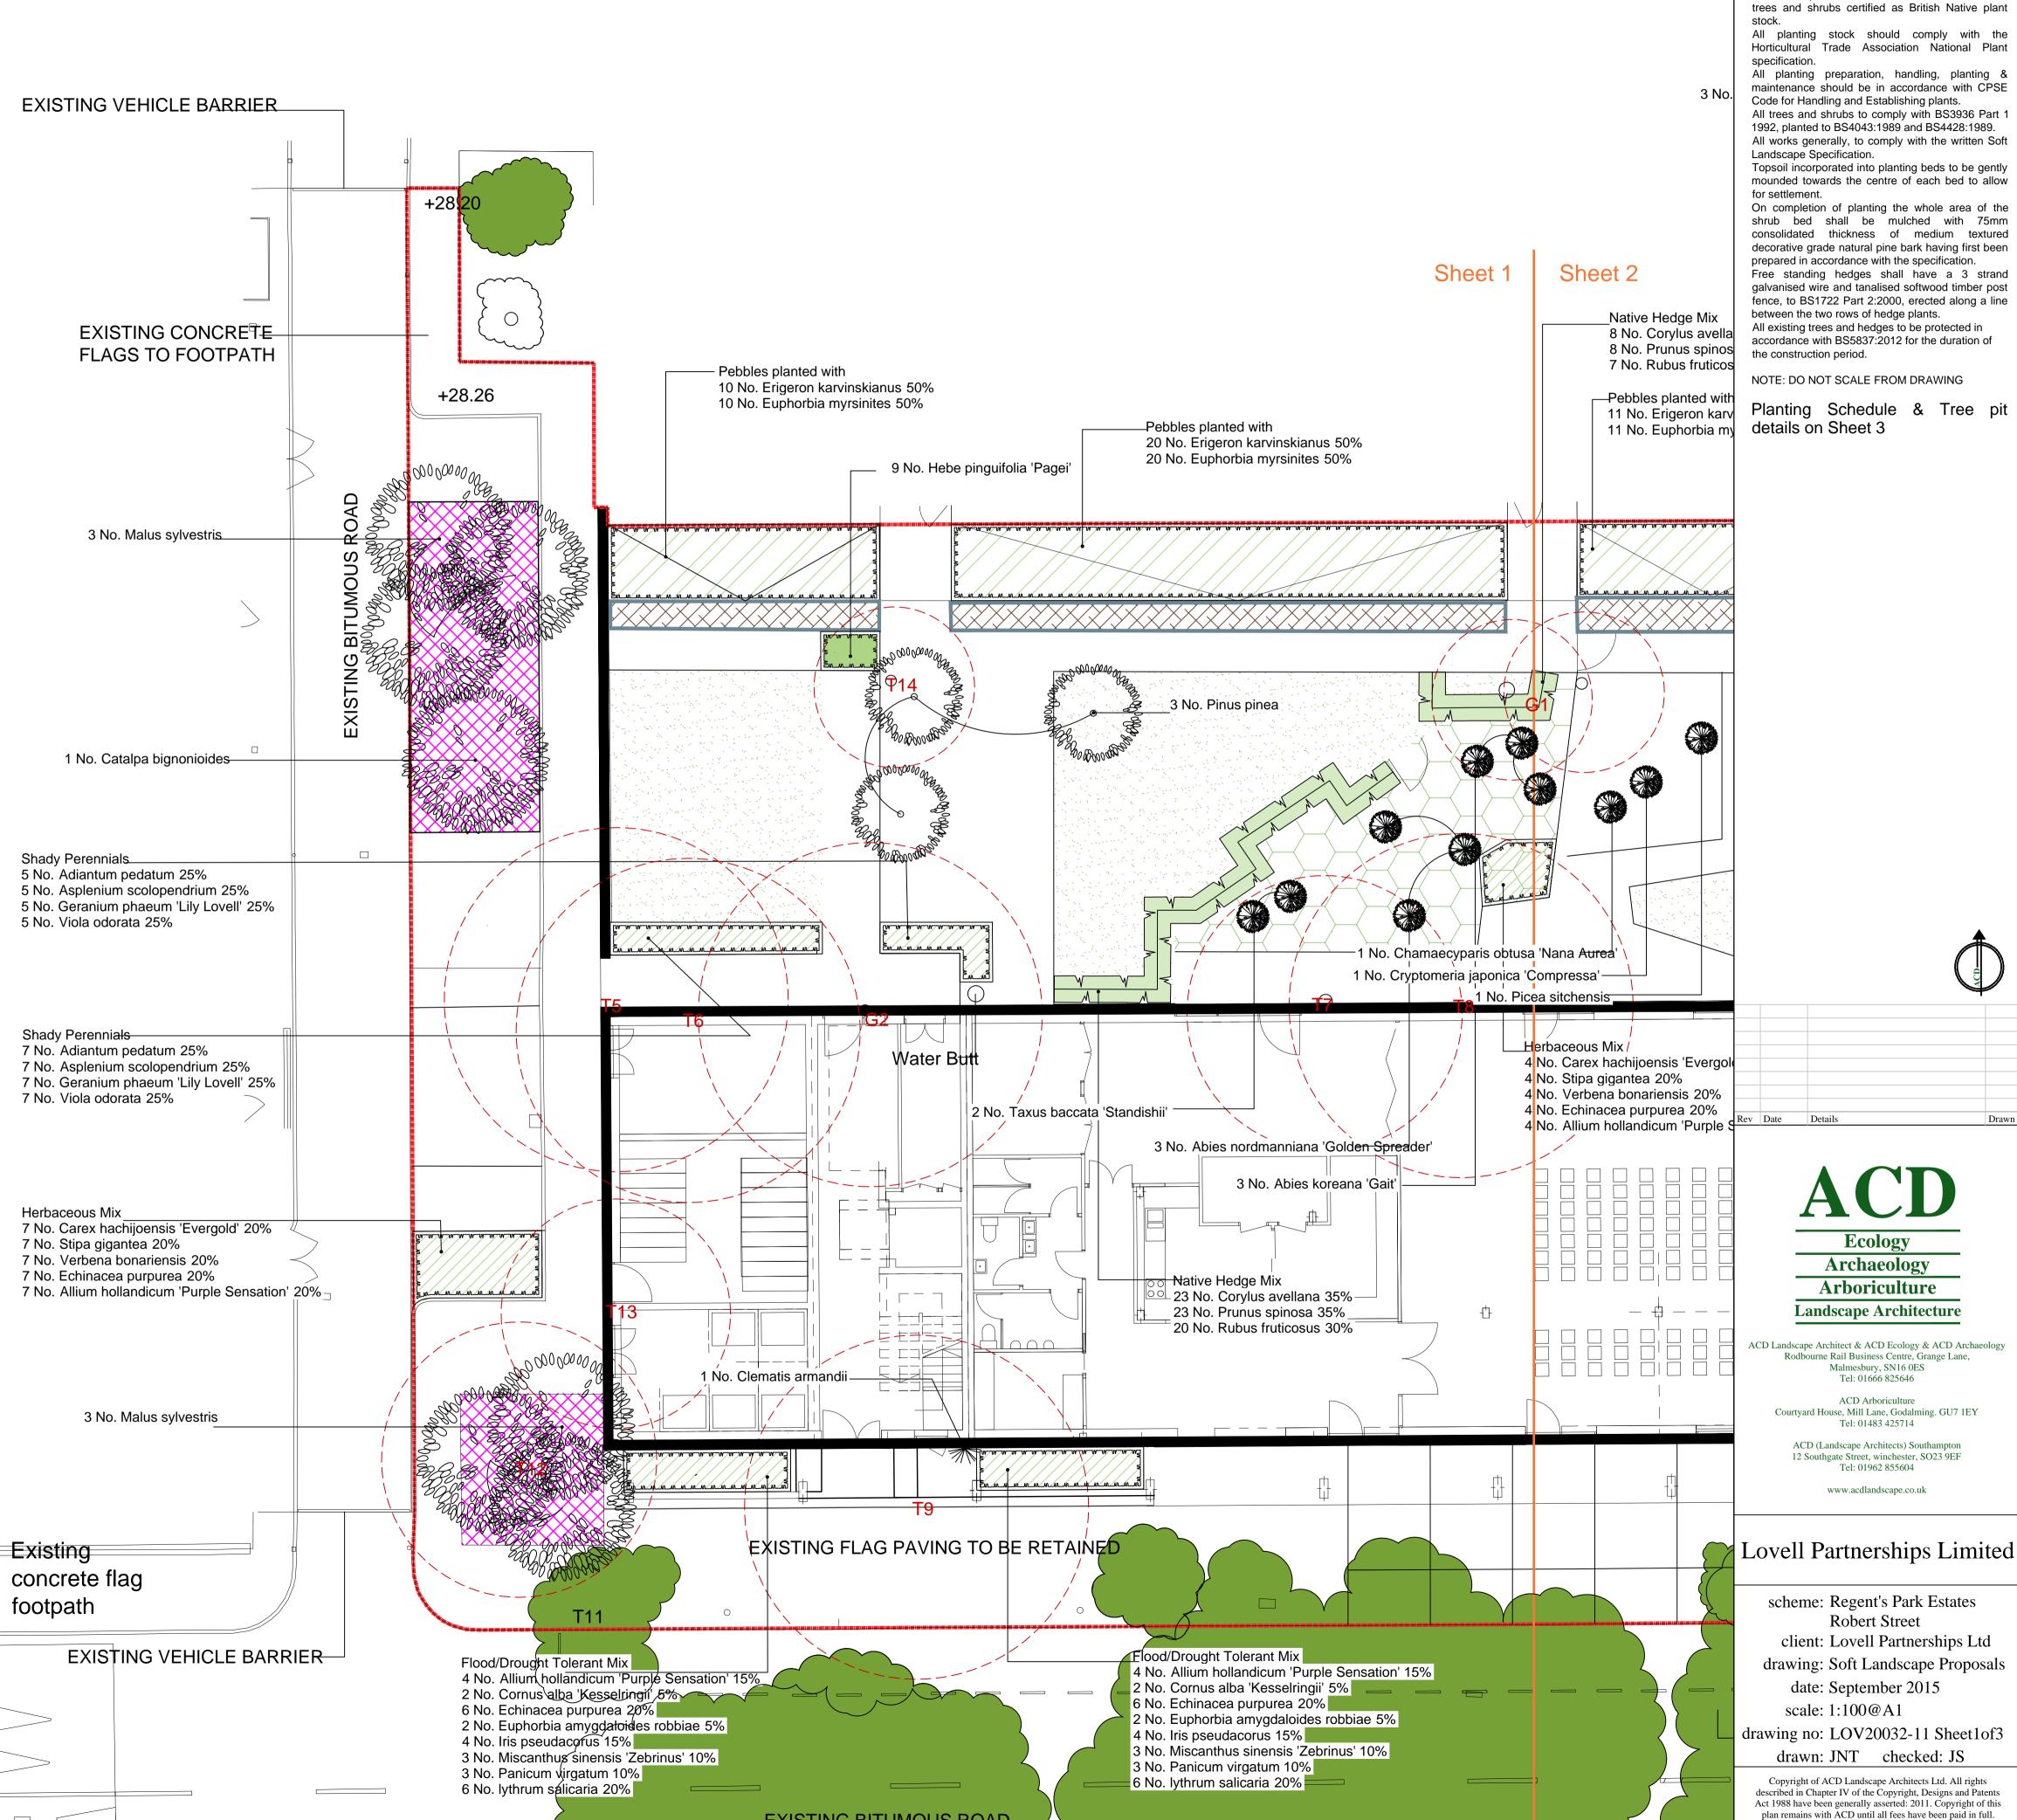

EXISTING BITUMOUS ROAD

**SPECIFICATION** 

Forestry Commission Practice note 8.

All native species should be of local stock. Native