


WEATHER LOUVRES

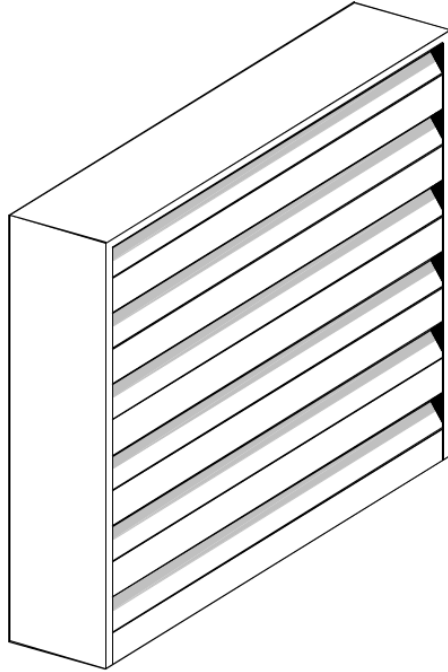

Weather louvres are typically used in builders work openings to reduce airborne noise whilst allowing airflow through the louvre.

Weather louvres are also used for screening of mechanical plant where the equipment requires airflow through the screen.

NSL louvres are available as either standard units to be installed in builders work openings or as bespoke units to suit a wide range of different requirements. NSL offer a design, supply and install service in order that a total solution can be offered.

Weather louvres can be supplied in four different blade depths:

- 50mm
- 75mm
- 100mm
- 125mm

Units can be supplied in a variety of finishes to suite the application:

- Pre-finished galvanised sheet steel or Aluminium
- Polyester Powder paint
- Plastisol
- Stove Enamel
- Anodised (Aluminium only)

Louvres are available with the following features:

- Birdmesh on the rear of the louvre
- Special fixing details, eg external / internal flanges

Please note that with any weather louvre care should be taken in the selection with regard to airflow and pressure drops. NSL engineers will be pleased to assist with the selection of weather louvres and advise on the pressure drops and acoustic performance expected.

For more detailed information and technical assistance please contact our Engineering / Sales Department.

Data Sheet: NSL/5110/A