


Flagpole Height m	Weight approx. kg
2	2.5
3	3.0
4	4.0
5	6.0
6	9.0
7	11.0
8	13.0
9	21.0
10	26.0
11	30.0
12	36.0
13	39.0
14	43.0
15	49.0
16	53.0
17	59.0
18	65.0

OUTER DIAMETER FROM BOTTOM

Distance from bottom	Diameter from bottom in mm																		
	Bottom	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
2	68	60	50																
3	76	68	60	50															
4	85	76	68	60	50														
5	95	85	76	68	60	50													
6	100	95	85	76	68	60	50												
7	113	111	107	97	85	74	68	50											
8	115	113	111	107	97	85	74	68	50										
9	135	133	130	127	118	110	98	87	76	65									
10	140	135	133	130	127	118	110	98	87	76	65								
11	142	140	135	133	130	127	118	110	98	87	76	65							
12	145	142	140	135	133	130	127	118	110	98	87	76	65						
13	173	168	165	160	150	146	139	132	126	121	113	105	93	75					
14	175	173	168	165	160	153	146	139	132	126	121	113	105	93	75				
15	178	175	173	168	165	160	153	146	139	132	126	121	113	105	93	75			
16	181	178	175	173	168	165	160	153	146	139	132	126	121	113	105	93	75		
17	183	181	178	175	173	168	165	160	153	146	139	132	126	121	113	105	93	75	
18	186	183	181	178	175	173	168	165	160	153	146	139	132	126	121	113	105	93	75



3.5mm thickness wall

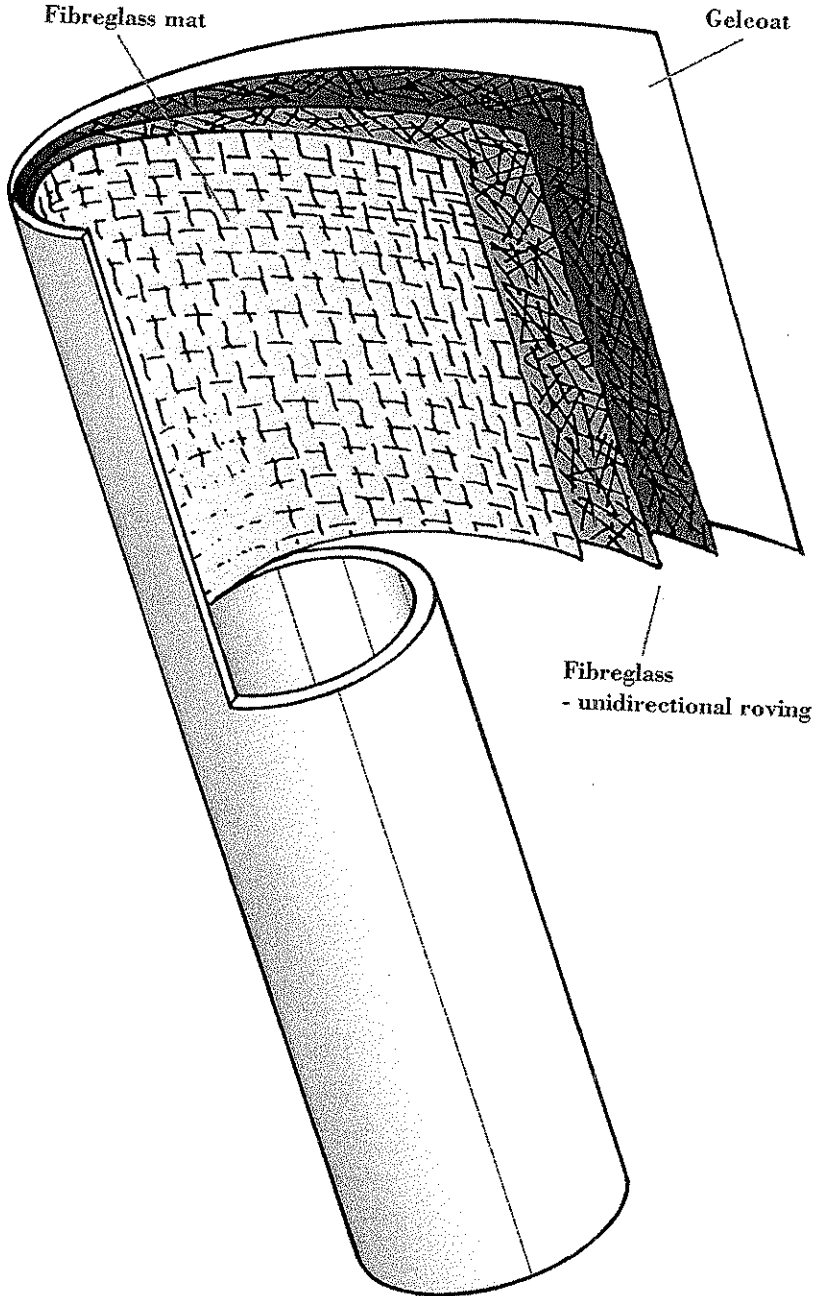

PRODUCT DESCRIPTION FLAGPOLES

The glass fibres in a Dano Mast flagpole are bonded together with polyester resin.

The surface consists of a 600- μ m thick, high white gel coat that reacts chemically with the glass fibre and polyester during hardening producing a smooth, shiny surface.

This dirt resistant surface ensures that the Dano Mast flagpole is both easy to clean with soapy water and resistant to pollution.

Flagpoles





PRODUCT DESCRIPTION INTERNAL HALYARD WITH LOCKABLE DOOR AND KEY

The anti-vandal protection system consists of an internal jamming cleat housing with lockable door mounted into the flagpole wall approx. 120 cm from the butt. When the flag is flying the halyard is held firmly in the jamming cleat.

Having been accessed by unlocking and opening the door the halyard can be released with a light downward tug. The flag can then be raised or lowered by operating the halyard through the door in the housing.

The internal halyard housing and door system is made of white-coated stainless steel and supplied with a set of two keys.

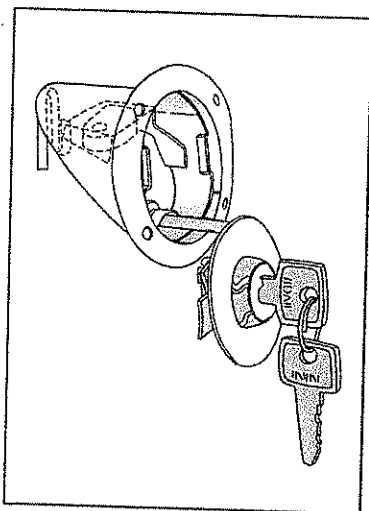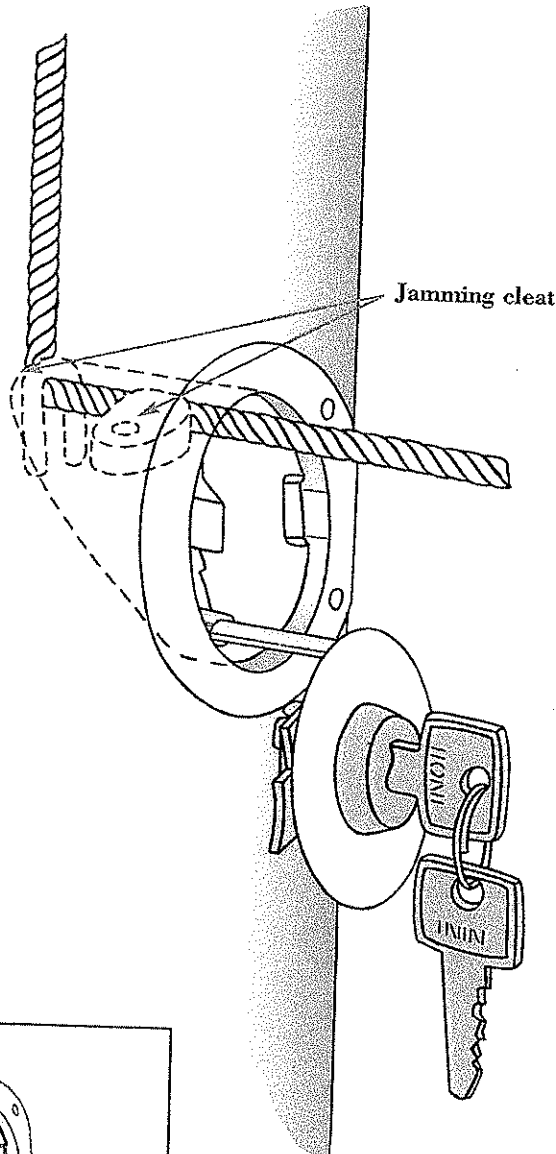

From 4 to 12 m flagpoles

Internal Halyard