










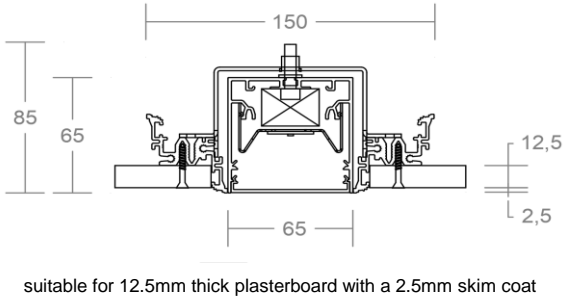

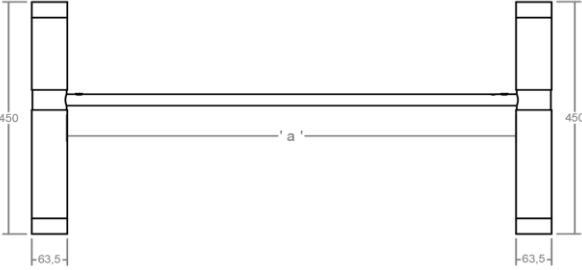

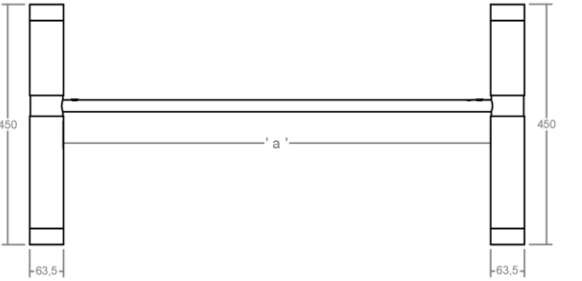



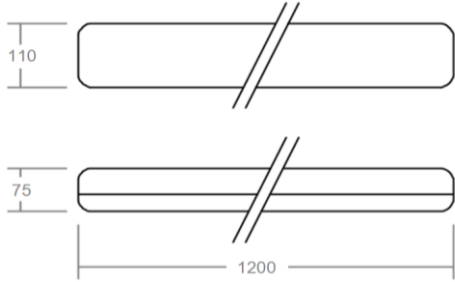











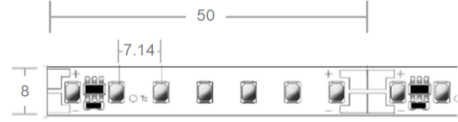
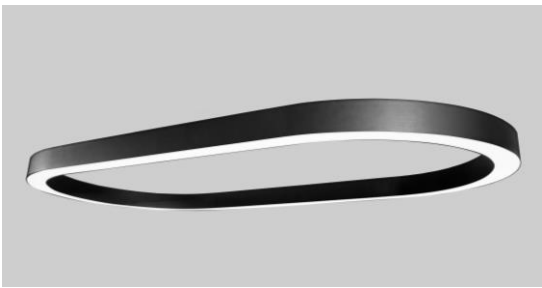





Ref	Fixture Ref	Description	Illustration	Dimensions	Lamp
A1	stair lighting	lightworks 15W 1000lm 3000K ispot pro w6+ surface mounted direct/indirect wall fixture c/w golden pearl finish, integral non controllable driver and 2 x 36° optic.			LED - 3000K
A2	stair lighting	lightworks 15W 1000lm 3000K ispot pro w6+ 6 surface mounted direct/indirect wall fixture c/w golden pearl finish, integral non controllable driver and 2 x 36° optic.			LED - 3000K
B + BE	toilets and corridors	lightworks 13W 910lm 3000K IP44 recessed downlight with trim c/w white finish, remote non controllable driver and 40° optic.  suffix E denotes remote 3 hour emergency circuit.			LED - 3000K
C1	TBC	feature pendant by others	-	-	-
D	office linear	lightworks 47W/m 5000lm/m 3000K iline 6 eco suspended direct/indirect linear profile system c/w white finish, integral switchDIM controllable drivers, suspension sets, 3 core clear power cable and mpo lens.			LED - 3000K

Ref	Fixture Ref	Description	Illustration	Dimensions	Lamp
H1	office linear	lightworks 26W/m 2800lm/m 3000K iline 6 eco surface mounted linear profile system c/w white finish, integral switchDIM controllable drivers and mpo lens.			LED - 3000K
H2	office linear	lightworks 26W/m 2800lm/m 3000K iline 6 recessed trimless linear profile system c/w white finish, integral switchDIM controllable drivers, trimless mounting rails and mpo lens.			LED - 3000K
L04A	ornate rooms	lightworks 2 x 15W 1000lm 3000K ispot pro 6 p2+ suspended direct/indirect pendant fixture comprising of 3 x quantity pendants c/w golden pearl finish, integral non controllable driver and 2 x 36° optic - various lengths for dimension 'a'			LED - 3000K
L04B	ornate rooms	lightworks 2 x 15W 1000lm 3000K ispot pro 6 p2+ suspended direct/indirect pendant fixture comprising of 6 x quantity pendants c/w golden pearl finish, integral non controllable driver and 2 x 36° optic - various lengths for dimension 'a'			LED - 3000K
L14	external lightwell	wall lights by others	-	-	-

Ref	Fixture Ref	Description	Illustration	Dimensions	Lamp
L15	corridors	<p>lightworks</p> <p>13W 910lm 3000K IP44 recessed downlight with trim c/w white finish, remote non controllable driver and 40° optic.</p> <p>suffix E denotes remote 3 hour emergency circuit.</p>		 <p>cutout - Ø80</p>	LED - 3000K
L17 + L17E	external plant lighting	<p>lightworks</p> <p>43W 4100lm 4000K IP65 surface mounted fixture c/w grey finish, integral non controllable driver and LED optimised optic - 1200mm</p> <p>suffix E denotes integral 3 hour emergency circuit.</p>			LED - 4000K
L18	kitchen vaulted ceiling	<p>12.8W/m 1280lm/m 3000K iflex c/w surface mounted tubular profile, live feeds, end caps, surface mounting clips, remote non controllable driver, anti-static pack and LED optimised optic - 2000mm</p>			LED - 3000K
L19 + L19E	plant rooms + cupboards	<p>lightworks</p> <p>12W 1200lm 4000K surface mounted fixture c/w white finish, integral non controllable driver, integral 3 hour emergency circuit, microwave sensor and led optimised optic.</p>			LED - 4000K
EM1	office emergency	<p>lightworks</p> <p>3.5W 150lm 5500K recessed emergency fixture c/w white finish, 3 hour duration emergency circuit, independent charge indicator and 150° open area optic.</p>		 <p>cutout - Ø42</p>	LED - 5500K

Ref	Fixture Ref	Description	Illustration	Dimensions	Lamp
EM2	stair lighting	lightworks 230V DC 3hr maintained remote emergency circuit to run up to 25W luminaires c/w galvanised steel finish.			-
EM3	stair lighting	lightworks 230V DC 3hr maintained remote emergency circuit to run up to 40W luminaires c/w galvanised steel finish.			-
LED	LED accent	lightworks 7.6W/m 900lm/m 3000K IPX6 iflex c/w surface mounted aluminium profile, live feeds, end caps, mounting clips, remote non controllable driver and LED optimised optic.			LED - 3000K
type D option 1	LED accent	lightworks 90W 11000lm 3000K iline 360 p0 suspended direct only oval fixture c/w white finish, integral switchDIM controllable driver, suspension sets, 3 core clear power cable and mpo lens - 2000x3150mm			LED - 3000K
type D option 2	LED accent	lightworks 50W 5800lm 3000K iline 360 p slim suspended direct only fixture c/w white finish, integral switchDIM controllable driver, suspension sets, 3 core clear power cable and mpo lens - Ø1220mm			LED - 3000K