



50 Mornington Terrace, London (Flat A - Basement and

**Ground floor flat)** 

Revision: Po1


Listed Building Consent Submission for Installation of Temporary Secondary Glazing and Mechanical Ventilation for Noise Attenuation as part of the HS2 Construction Works

Author: Arup/CSjv.

Revision: Po1

Date: 06/04/2021








### **Contents**

| 1 | Intr  | oduction  | 4  |
|---|-------|---|----|
|   | 1.1   | Scope of this Document  | 4  |
|   | 1.2   | Works Affecting 50 Mornington Terrace   | 5  |
|   | 1.3   | Context   | 5  |
|   | 1.4   | Publications  | 5  |
|   | 1.5   | Heritage Assets   | 5  |
| 2 | Hist  | orical Background   | 10 |
|   | 2.1   | Mornington Terrace History & Design   | 10 |
|   | 2.2   | Design and Construction   | 14 |
|   | 26-5  | 2 Mornington Terrace  | 14 |
|   | 53 aı | nd 54 Mornington Terrace  | 16 |
|   |       | nd 56 Mornington Terrace  |    |
|   | The   | Edinburgh Castle, 57 Mornington Terrace   | 16 |
|   |       | lornington Terrace  |    |
|   | 2.3   | Social History  |    |
|   | 2.4   | Timeline  | -  |
|   | 2.5   | References  |    |
|   | _     |   | _  |
| 3 | Sta   | tement of Significance: 50 Mornington Terrace                                       |    |
|   | 3.1   | Purpose of the Statement of Significance  |    |
|   | 3.2   | Architectural and Historic Significance   | 21 |
|   | 3.3   | Communal Significance   | 22 |
|   | 3.4   | Schedule of Significant Elements: 50 Mornington Terrace                             | 22 |
|   | 3-5   | Camden Town Conservation Area   | 25 |
| 4 | Des   | ign Statement & Statement of Justification  | 26 |
|   | 4.2   | Noise Mitigation during Construction of HS2   | 26 |
|   | 4.3   | Installation of Temporary Internal Secondary Glazing & Mechanical Ventilation Units | 26 |
|   | 4.4   | Schedule of Proposed Works  | 27 |







| 6 | Pho | Photographs                   |    |  |  |
|---|-----|-------------------------------|----|--|--|
| 5 | Con | clusion                       | 34 |  |  |
|   | •   |                               |    |  |  |
|   | 4.8 | Justification                 | 32 |  |  |
|   | 4.7 | Impact of the Proposed Design | 30 |  |  |
|   | 4.6 | Impact Assessment             | 30 |  |  |
|   | 4.5 | Design Proposal               | 27 |  |  |
|   | -   | WPI Po66 NI-50A MT-EX-EL-01   | 27 |  |  |





### 1 Introduction

### 1.1 Scope of this Document

- This document relates specifically to the basement and ground floor flat at 50 Mornington Terrace where internal secondary glazing and noise attenuating mechanical ventilation is proposed to be installed. The property is a Grade II listed 'palace front' residential terraced house in Mornington Terrace, within the Camden Town Conservation Area.
- 1.1.2 This document does not consider the construction of the HS2 railway, which is authorised under the High Speed Rail (London-West Midlands) Act 2017 and any relevant Heritage Agreements.
- 1.1.3 This document considers the following proposals which require Listed Building Consent:
  - A. Installation of temporary internal secondary glazing to the front façade: Installation of internal secondary glazing to two (2) windows for noise mitigation during construction of the HS2 railway at Euston;
  - B. Installation of temporary mechanical input ventilation fan (Sonair F+ unit) to the front of the building at basement and ground floor for noise mitigation during construction of the HS2 railway at Euston.
- This document fulfils the requirement of National Planning Policy Framework policy 189 which states that "In determining applications, local planning authorities should require an applicant to describe the significance of any heritage assets affected, including any contribution made by their setting. The level of detail should be proportionate to the assets' importance and no more than is sufficient to understand the potential impact of the proposal on their significance. As a minimum the relevant historic environment record should have been consulted and the heritage assets assessed using appropriate expertise where necessary. Where a site on which development is proposed includes or has the potential to include heritage assets with archaeological interest, local planning authorities should require developers to submit an appropriate desk-based assessment and, where necessary, a field evaluation" and London Borough of Camden's listed building application requirements.
- 1.1.5 This application should be read in conjunction with the following documents:
  - Existing and Proposed Drawings;
  - HS2 Submission Statement; and
  - Sonair Specification Sheet.





#### 1.2 Works Affecting 50 Mornington Terrace

- 1.2.1 50 Mornington Terrace stands within the Camden Town Conservation Area and is a Grade II listed building. Grade II buildings are of special interest and represent 91.7% of all listed buildings.
- As a Grade II listed building, 50 Mornington Terrace is valued for its special historic and architectural interest and is under the statutory protection of the Planning (Listed Buildings and Conservation Areas) Act 1990. Under this Act any work to a listed building that involves demolition, alteration or extension in any manner that would affect the character or appearance as a building of special architectural or historic interest would require Listed Building Consent.

#### 1.3 Context

- 1.3.1 The current application for Listed Building Consent for HS2 works to 50 Mornington Terrace is submitted in the context of the following statutory provisions, public undertakings & assurances, and public Information Papers:
  - High Speed Rail (London West Midlands) Act 2017
  - Phase 1: HS2 Register of Undertaking & Assurances
  - Environmental minimum requirements for HS2 Phase One
  - HS2 Phase 1 Information Paper E23 Control of Construction Noise and Vibration

#### 1.4 Publications

- 1.4.1 The following publications have been consulted during the preparation of this document:
  - 'Camden Local Plan', adopted 3 July 2017
  - 'Camden Town Conservation Area Appraisal and Management Strategy', adopted 4 October 2007
  - 'National Planning Policy Framework', February 2019
  - 'Conservation, Principles, Policies and Guidance', Historic England, March 2015
  - 'Informed Conservation: understanding historic building and their landscapes for conservation', English Heritage *now* Historic England, March 2003
  - 'Managing Significance in Decision-Taking in the Historic Environment; Historic Environment Good Practice Advice in Planning: 2'. Historic England. July 2015
  - 'The Setting of Heritage Assets; Historic Environment Good Practice Advice in Planning:3', Historic England, July 2015
  - 'Energy Efficiency and Historic Buildings; Secondary Glazing for Windows.', Historic England, April 2016

### 1.5 Heritage Assets

1.5.1 Camden Town Conservation Area:





Designated in 1986, Camden Town Conservation Area is positioned centrally to the London Borough of Camden. It lies to the north of Euston Station and south of Kentish Town and is defined to the west by the rail tracks which run from Euston to Birmingham. It is this linearity to the western boundary and the frontage of Mornington Terrace which defines the Conservation Area and provides its special interest.

#### 1.5.2 Listing Description

#### 26-52 MORNINGTON TERRACE AND ATTACHED RAILINGS

List Entry Number: 1113144

Grade: II

Date first listed: 14-May-1974

Details:

TQ2883NE MORNINGTON TERRACE 798-1/76/1157 (East side) 14/05/74 Nos.26-52 (Consecutive) and attached railings

Terrace of 27 houses. Mid C19. Yellow stock brick with rusticated stucco ground floors. Slate mansard roofs and dormers. Formerly symmetrical terrace; projecting central houses (Nos 33-38) and northern end houses (Nos 50-52), southern projection missing. 3 storeys, attics and semi-basements; central and end houses 4 storeys and semi-basements. 2 windows each. Stucco porticoes with pilasters carrying entablature; fanlights and panelled doors, some with nail-head ornament. Entrance to No.52 in side portico. Ground floor sashes of Nos 26, 27, 29, 31, 32 & 40 with margin glazing. Stucco fluted lonic pilasters mark division of houses rising through 1st and 2nd floors to carry entablature at 3rd floor level (except Nos 46 & 49), formerly with balustraded parapet. Recessed, architraved sashes to upper floors; 1st floor with console bracketed cornices and continuous cast-iron balcony.

INTERIORS: not inspected.

SUBSIDIARY FEATURES: attached cast-iron railings flanking steps to doorways and geometrical railings to areas.

Listing NGR: TQ 2881183531

53 AND 54, MORNINGTON TERRACE

List Entry Number: 1113145



hs engine for growth

Grade: II

Date first listed: 14-May-1974

Date of most recent amendment: 11-Jan-1999

Details: TQ2883NE MORNINGTON TERRACE 798-1/76/1158 (East side) 14/05/74 Nos.53 AND

54 (Formerly Listed as: MORNINGTN TERRACE Nos.53-56 (Consecutive))

Pair of terraced houses. C19 mid-later. Yellow stock brick with stucco quoins and dressings. 3 storeys and basements. 1 window each plus 1 window recessed entrance bays. Projecting stucco porticoes; doorways with fanlights and panelled doors. Ground and 1st floor, tripartite sashes with lugged stucco surrounds. Round-arched 2nd floor sashes with lugged stucco surrounds under small gables in hipped, slated roof with projecting bracketed eaves. Large centrally positioned slab chimney-stack.

INTERIORS: not inspected.

Listing NGR: TQ2879483551

55 AND 56 MORNINGTON TERRACE AND ATTACHED RAILINGS

List Entry Number: 1113146

Grade: II

Date first listed: 14-May-1974

Date of most recent amendment: 11-Jan-1999

Details: TQ2883NE MORNINGTON TERRACE 798-1/76/1159 (East side) 14/05/74 Nos.55 AND

56 and attached railings (Formerly Listed as: MORNINGTN TERRACE Nos.53-56

(Consecutive))

Pair of terraced houses. C19 mid-later. Yellow stock brick with stucco quoins and dressings. Slate roofs with projecting bracketed eaves and tall brick chimney-stacks. Corner site with irregular facade. 4 storeys and basements. No.55, 1 window plus 1 window recessed entrance bay. No.56, large octagonal corner tower (alternate facades fenestrated), 3 windows (1 in projecting bay) and recessed 1 window entrance bay to Delancey Street. Projecting stucco porticoes; doorways with fanlights and panelled doors. No.55, stuccoed canted bay at ground





floor; recessed sashes with lugged stucco surrounds, 2nd floor round-arched. No.56, segmental-headed sashes; corner facade of tower upper floors architraved, 1st floor round-arched. Projecting bay, square-headed, architraved sashes. Panelled stucco band at eaves level.

INTERIORS: not inspected.

SUBSIDIARY FEATURES: attached cast-iron railings with fleur-de-lys finials to areas.

Listing NGR: TQ2879083556

**EDINBURGH CASTLE PUBLIC HOUSE** 

List Entry Number: 1113147

Grade: II

Date first listed: 14-May-1974

Date of most recent amendment: 11-Jan-1999

Details: TQ2883NE MORNINGTON TERRACE 798-1/76/1160 (West side) 14/05/74 Nos.57

Edinburgh Castle Public House

Public house. Mid C19, restored 1984. Stucco with wooden public house frontage. 3 storeys and cellars. Double fronted with 3 windows; right hand return 1 blind window and 3 light canted bay. Public house frontage with central entrance and Corinthian pilasters carrying entablature with dentil cornice and broken segmental pediment over door. Panelled dado. Upper floors with recessed sashes; 1st floor with architraves and cornices. Entablature and shaped blocking course. Curved wrought-iron lamp bracket above door.

INTERIORS: not inspected.

Listing NGR: TQ2875383537

58 MORNINGTON TERRACE AND ATTACHED WALL AND GATE PIERS

List Entry Number: 1113148

Grade: II

Date first listed: 14-May-1974

Details: TQ2883NE MORNINGTON TERRACE 798-1/76/1161 (West side) 14/05/74 Nos.58 and





attached wall and gate piers

Semi-detached house. Mid C19. Stucco. 2 storeys 2 windows. Slightly projecting entrance bay. Portico with pilasters supporting entablature the cornice of which carries across the house at 1st floor level. Fanlight and panelled door. Architraved sashes, ground floor tripartite with eared architrave; 1st floor with cornices, console bracketed above entrance. Cornice and enriched blocking course.

INTERIOR: not inspected.

SUBSIDIARY FEATURES: attached stucco forecourt wall and gate piers. Forms a group with the Edinburgh Castle Public House (qv).

Listing NGR: TQ2876783534





# 2 Historical Background

### 2.1 Mornington Terrace History & Design

- 2.1.1 Mornington Terrace was originally created as Mornington Road and was built most likely as a speculative development either by Lord Southampton or by a developer who leased the land from Lord Southampton<sup>1</sup>. Mornington Road was renamed Mornington Terrace in 1937<sup>2</sup>.
- The construction date for Mornington Road is unclear but can be narrowed down to 1834 to 1843 (Figure 1, 2 and 3). This road was probably created for the construction of the railway and was realigned slightly further to the east to the present Mornington Terrace position, probably to maximise the number of building plots for houses, placing the Edinburgh Terrace on the left-hand side of this road.
- 2.1.3 Mornington Road was laid out approximately north-south from West Stanhope Street (now Delancey street) to Stanhope Place<sup>3</sup> at the southern end and bisected by Crescent Place (now Mornington Place). The original length of Mornington Road is now comprised of Mornington Terrace to the north and Clarkson Row to the south.
- 2.1.4 Buildings in Mornington Road were originally composed of the eastern side of the road of two terraces of houses; Friedenstein Terrace (now 26 to 52 Mornington terrace) and Ehrenberg Terrace (now 3 to 14 Mornington Terrace). On the western side of road, the Edinburgh Castle was built first, followed by an attached house to the south (now 57 Mornington Terrace) and thirteen relatively large semi-detached villas on the western side of the road.
- The villas were demolished in 1900-1905 to make way for widening of the rail cutting into Euston and construction of a new carriage shed and only the Edinburgh Castle and 57 Mornington Terrace survives on the original alignment of the villas. Houses 20 to 25 Mornington Terrace (formerly Friedenstein Terrace) and 15 to 19 Mornington Terrace (formerly Ehrenberg Terrace) and buildings in Mornington Street were damaged beyond repair by World War II bombing and replaced with low rise blocks of flats.

<sup>&</sup>lt;sup>1</sup> Charles Fitzroy, 3<sup>rd</sup> Baron Southampton, 1804-1872

<sup>&</sup>lt;sup>2</sup> 'Streets of Camden', Camden History Society. P78

<sup>&</sup>lt;sup>3</sup> Now the south-eastern end of Clarkson Row





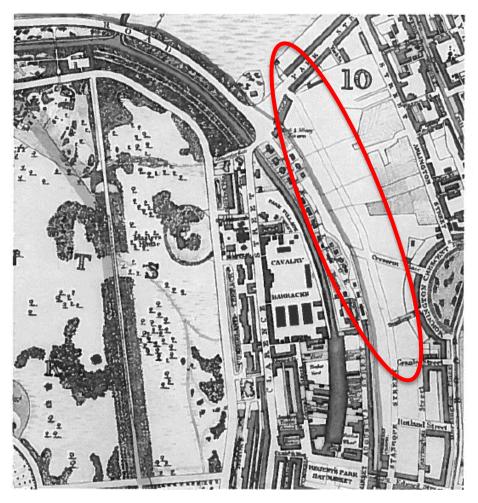


Figure 1: Current location of Mornington Terrace is shown on the right part of the 1834 map. The area is highlighted by the red oval, in The Camden Town Book, John Richardson (London, 2007), p. 55.





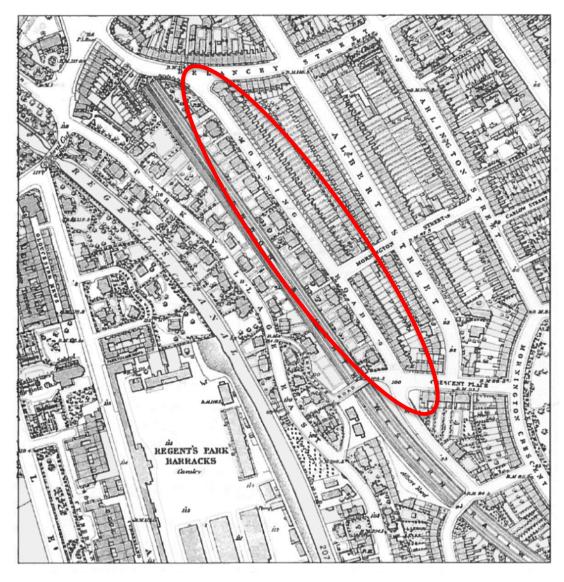


Figure 2: An 1870 map of the L & NWR route through the lower part of Camden Town – Mornington Terrace is highlighted by the oval, in The Camden Town Book, by John Richardson (London, 2007), p. 84.





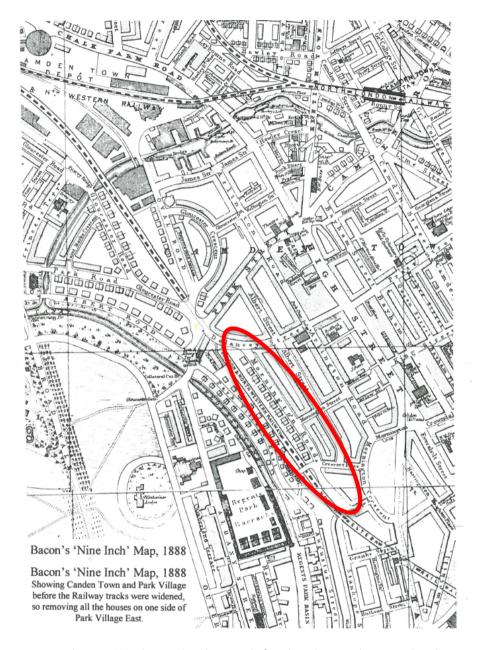


Figure 3: 'Bacon's Nine Inch Map, 1888, showing Camden Town before the railway tracks were widened. Mornington Terrace is highlighted by the red oval.', in the Growth of the Camden Town: AD 1800-2000, by Jack Whitehead (London 1999), p. 16.

- 2.1.6 Based on analysis of extant maps, the construction dates for buildings in Mornington Road are believed to be as follows:
  - c. 1834 Edinburgh Castle, 58 Mornington Terrace.
  - By 1843 The southern end of Friedenstein Terrace, Mornington Road is built (26-52 Mornington Terrace). Construction therefore occurs between 1834 and 1843.





| By 1843 | 3 Villas on the west side of Mornington Road are built. |
|---------|---|
|         |   |

- c. 1843 Remaining section of Friedenstein Terrace is built.
- c. 1843 8 more villas on west side of Mornington Road are built.
- c. 1843 57 Mornington Terrace is built (attached to the Edinburgh Castle).
- c. 1843 53-54 Mornington Terrace. This building appears to be built before completion of Friedenstein Terrace.

Post 1843 55-56 Mornington Terrace – date uncertain but probable before 1850.

- 2.1.7 Mornington Crescent, Mornington Road and Mornington Street were named as a compliment to the Richard Colley Wellesley, Earl of Mornington, Governor General of India, the brother of the Duke of Wellington, and afterwards better known as the Marquis of Wellesley<sup>4</sup>.
- The naming of Friedenstein Terrace is unclear and may refer to the builder, or principal investor for the development or may be a mark of respect to Prince Albert of the Saxe Coburg and Gotha, and his ancestral home Friedenstein Castle (*Schloss Friedenstein*) and home to the Dukes of Saxe-Gotha and Coburg.

### 2.2 Design and Construction

#### 26-52 Mornington Terrace

- Friedenstein Terrace (now 26 to 52 Mornington Terrace) was originally constructed as a row of 33 houses comprising two end blocks and a central block of four storeys of brick and stucco and an attic storey or attic with dormer windows in a slate mansard roof. This format of 'row houses' with visually distinct blocks was developed and adapted by eighteenth and nineteenth century architects to create a uniform and symmetric façade which visually appeared to be a single building. This design form was inspired by the long neo-classical facades of Europe's royal palaces. The building format was used on the principal façade and return elevations that were publicly seen and is described as a 'Palace-front' façade. In contrast, the rear elevation is a collection of almost identical units which are not brought together as a single homogeneous element.
- 2.2.3 The principal façade is composed of the following: five storeys end blocks of six window bays or three houses linked to the central block by eighteenth recessed bays (nine houses); the

-

<sup>&</sup>lt;sup>4</sup> Survey of London, Volume 24, the Parish of St Pancras Part 4: King's Cross Neighbourhood, ed. Walter H. Godfrey and W. McB. Marcham (London, 1952), pp.132-133. British History Online <a href="http://www.british-history.ac.uk/survey-london/vol24/pt4/pp132-133">http://www.british-history.ac.uk/survey-london/vol24/pt4/pp132-133</a>.





central block is fourteen bays wide comprising seven houses. Many of the houses have been divided into flats. The architect and builder of Friedenstein Terrace is unknown.

- 2.2.4 Conversion into flats was first used for rows of houses in 1729 by John Wood of Bath<sup>5</sup> by stressing the central and end block within the façade to give the impression of a single palatial building.
- The Palace front design was inspired by the work of Andrea Palladio (1508-80) who created long facades with distinct units, often with separate roof planes and individual architectural details, set within the façade projecting from, or recessed behind the main wall line. This approach to designing visually distinct blocks linked by a recessed façade is called 'concatenation' and was developed and refined in the United Kingdom in the eighteenth and nineteenth centuries by architects such as John Webb, William Kent, William Chambers and John Nash in large houses and administrative buildings creating the English neo-classical style of 'Palladianism'.
- 2.2.6 The southern end of the terrace comprising six houses with the end block was damaged beyond repair by World War II bombing and demolished and replaced with the extant block of low rise flats.
- 2.2.7 The principal façade is built in yellow London Stock brickwork laid in Flemish bond and enriched with rusticated Roman cement stucco at ground level, plain render at basement level, a continuous balcony with cast iron railings, window architraves and pediments at first floor level and window architraves and cill at second floor level capped by a stucco entablature and cornice. Inspection along the terrace and evidence surviving at 32 Mornington Terrace, indicates the front elevation brickwork was probably originally 'tuck pointed'. Unfortunately, most of the terrace has been repointed using modern cement-sand mortars in crude weather struck and flush jointed styles. <sup>6</sup>
- 2.2.8 The façade is divided vertically by Ionic pilasters rising from the first-floor balcony to the entablature at third floor level to create visual boundaries between each house. The end block and central block is capped by a pitched slate roof and the recessed facades are capped with a slate mansard roof. Party walls and chimneys extends above roof level between each house. It is likely the mansard roof was originally fitted with small window dormers with sash windows to provide habitable spaces or garrets for a small number of house servants.

<sup>&</sup>lt;sup>5</sup> 'Illustrated Dictionary of Architecture 800-1914', J Lever & J Harris. Faber & Faber 1993

<sup>&</sup>lt;sup>6</sup> The brickwork at number 32 is pointed in a coloured mortar which is finished flush with the brick, grooved along the centre of the joints and finished with a thin coloured 'tape' of mortar. Tuck pointing was used during the late eighteenth and nineteenth centuries on brickwork elevations to create a refined, elegant façade with the appearance of precise brickwork, similar to 'cut and rubbed' gauged brickwork. Tuck pointing was fashionable in London at this time as was used by builders to convey quality, refinement and fashion.





#### 53 and 54 Mornington Terrace

- Numbers 53 and 54 are a relatively small pair of semi-detached houses in a simple late Georgian neo-classical Italianate style, built c.1843 in the early years of the reign of Queen Victoria. The building is four storeys including a basement of relatively low storey heights. The building is constructed of good quality yellow London Stock brickwork laid in Flemish bond with painted stucco quoins, window architraves and entablature with simple bracketed eaves and pitched slate roof. The ground and first floor windows are tripartite sash windows and the third floor is composed of a round headed sash window. There is a large chimney separating the two houses running almost the complete depth of the house. The entrance to each house is forward facing but set back from the main façade in a small two storey unit with flat roof.
- 2.2.10 The building style is completely different to all other buildings in Mornington Terrace; the style, size and historical development of local maps indicates this building plot was sold or leased separately to either a small developer or property owner wishing to build a pair of houses for his family.
- The building is a good example of a simple late Georgian design; unfortunately, the building has been repointed in a modern cement-sand mortar using a weather struck joint which diminish the building's visual qualities.

#### 55 and 56 Mornington Terrace

- 2.2.12 55 and 56 is a large semi-detached pair of houses in a unique style and design that maximised the original footprint of its site.
- The building is five storeys including basement. The storey heights are higher than its neighbour, numbers 53-54 Mornington Terrace, which it unfortunately dominates. The building is constructed of good quality yellow London Stock brickwork lain in Flemish Bond. The full height canted bay is built in English Bond.
- The quoins, window architraves, elements of the ground floor canted bay, and entablature are formed in painted stucco. The eaves are visually supported by pairs of large scrolled brackets. The entrance to number 55 is set back from the main façade and entered from Mornington Terrace. Number 56 is entered through a small single storey porch on the rear elevation set back from the main façade on Delancey Street.

#### The Edinburgh Castle, 57 Mornington Terrace

The Edinburgh Castle was the first building constructed on the corner of what was to become Mornington Terrace, built some time before 1834. The building is a very fine example of a late Georgian public house which probably provided boarding rooms for visitors and senior employees of the railway. The building is three storeys but probably also includes a basement in addition. The east facing façade onto Mornington Terrace includes a well-proportioned and designed 'public house shop front'. Probably constructed in London Stock brickwork the





facades are finished in stucco with simple window architraves and pediments at first floor level and entablature, cornice and parapet. The building is a historically and architecturally significant element within the local landscape.

#### **58 Mornington Terrace**

- Number 58 is a small three storey house including basement which is attached to south wall of the Edinburgh Castle. Review of the chronological development of local maps (see appendix) indicates the building had been built by 1843just before completion of the final three Villas along the western side of Mornington Road.
- The building is of the same design as the Edinburgh Castle but smaller in scale and height with decorated stucco elevations. The size and design create a simple yet elegant building.

#### 2.3 Social History

- The terrace has had some distinguished inhabitants; 12 Mornington Road was occupied by H G Wells and his lover Catherine Robins between 1894-98 and was where he wrote *The Time Traveller*, *The Wonderful Visit* and *The Island of Doctor Moreau*.
- 2.3.2 Mrs E Christian of 52 Friedenstein Terrace, Mornington Road was an exhibitor at the 1846 Royal Academy Exhibition.
- 2.3.3 J P Gibbons of 11 Friedenstein Terrace, Mornington Road is recorded in the 1846 'First Report' list of donations and subscriptions for the Associate Institution for Improving and Enforcing the Laws for the Protection of Women.
- The death in 1846 of Mrs Hitchcock age 63 of Friedenstein Terrace, Mornington Road is recorded in the obituary of Gentleman's Gazette, by Sylvanus Urban, Volume XXVI, 1846.
- 2.3.5 Chemist, Sir William Crookes (1832-1919) lived at 20 Mornington Road between 1858 and 1881 and owned the house from, 1861 until his death in 1919. In 1862 the rates for the property are recorded at £56 per annum, the highest in Mornington Road, which at the time was a professional middle-class neighbourhood<sup>7</sup>.
- 2.3.6 Dr Valentine Flood is recorded as living in Ehrenberg Terrace, Mornington Road in 1840.
- The Glover family are recorded as owning two houses in Stanhope St., later 3 and 5 Ehrenberg
  Terrace, later 9 and 11 Mornington Road, Regent's Park. This provides some evidence that
  Mornington Terrace was initially named Stanhope Street North.

\_

<sup>&</sup>lt;sup>7</sup> 'Invisible resource: William Crookes and is circle of support 1871-81', Hannah Gray. British Society for the History of Science. 1996





- 2.3.8 A petitioner, Henry Thomas Fluck records a debt of a law student residing at 7 Ehrenberg Terrace, Mornington Crescent, Hampstead Road in the London Gazette dates Friday January 24, 1851.
- 2.3.9 The death of Edward Percy Sinnett, Esq of 9 Ehrenburg Terrace, Regent's Park is recorded in the Economist on 18 May 1844.
- John Indermaur of 21 Friedenstein Terrace, Mornington Road is recorded as being admitted as an Attorney in the Michaelmas term of 1847 in Legal Observer Digest, May to October 1847.

#### 2.4 Timeline

- A brief chronology is included of the development of Mornington Terrace and the railway which has played a significant part in the creation and change of the local area. Significant local and national social history is included for context.
  - King George III declared insane and parliament approved the 'Care of King During his Illness etc. Act 1811'. On 5 February 1811, George IV, Prince of Wales was appointed HRH The Prince Regent.
  - 29 January 1820 King George III died and his son, HRH Prince Regent, George Augustus Frederick Hanover anointed King George IV.
  - 26 June 1830 King George IV dies and his brother, William Henry Hanover becomes King William IV until his death on 20 June 1837.
  - 1834-37 Construction of the London & Birmingham Railway from Camden Town to Euston and rail cutting is created.
  - c.1834 Edinburgh Castle, 58 Mornington Terrace is built. Figure A2 in appendix.
  - 20 June 1837 King William IV dies and Alexandrina Victoria Hanover daughter of Prince Edward, Duke of Kent and Strathearn, the fourth son of King George III, becomes Queen Victoria.
  - The Euston to Boxmoor section of railway opened on 20 July 183, and the 32-mile (52 km) line from Euston to Tring (and another section south from Birmingham) was opened in October 1837.
  - The railway through line from London to Birmingham opened for public service on 17 September 1838.





- 1840-51 10 February 1840 Queen Victoria and Prince Albert of Saxe-Coburg and Gotha (Francis Albert Augustus Charles Emmanuel) are married.
- By 1843 The southern end of Friedenstein Terrace, Mornington Road is built (26-52 Mornington Terrace). Construction therefore occurs between 1834 and 1843.
- By 1843 3 Villas on the West side of Mornington Road are built.
- c.1843 Remaining section of Friedenstein Terrace is built.
- c.1843 Eight more villas on west side of Mornington Road are built.
- c.1843 57 Mornington Terrace is built (attached to the Edinburgh Castle).
- c.1843 53-54 Mornington Terrace is built.
- Post 1843 55-56 Mornington Terrace is built date uncertain but probably before 1850.
- London & Birmingham Railway amalgamated with other rail companies to become London & North-Western Railway (LNWR).
- 1858-1881 Chemist, Sir William Crookes lived at 20 Mornington Terrace.
- 1894-98 H G Wells lived at 12 Mornington Road.
- 1900-05 26 semi-detached houses on the western side of Mornington Road (now Mornington Terrace) were demolished to make way for the widening of the rail cutting into Euston and construction of a new carriage shed.
- A high explosive bomb is dropped on Mornington Terrace during night time bombing in World War II. The bombing census records the event at some time between 7 October 1940 and 6 June 1941.

#### 2.5 References

- 'Streets of Camden Town', Camden History Society 2003
- 'Survey of London, Volume 24', London County Council, 1949, ULAN Press reprint
- 'Camden Town Conservation Area Appraisal and Management Strategy', adopted 4
   October 2007





# 3 Statement of Significance: 50 Mornington Terrace

### 3.1 Purpose of the Statement of Significance

- In conservation, 'significance' encompasses a broad range of considerations about what may constitute the special value or 'interest' of a building or place; these are referred to as the 'heritage asset'. Commonly, a mix of factors may contribute to this special value, such as a building's architectural quality and association with important people or cultural events. Sometimes, these factors may not be immediately apparent, such as the use of pioneering construction technology, fine craftmanship or the special social or economic role a building or place has within a community.
- 3.1.2 A statement of significance provides a concise account of the reasons why heritage assets are valued and why they should be protected and preserved. The statement can provide a more thorough appraisal than a listing description alone. They can help clarify which items or elements have little or no value, or which actively detract from significance, to allow for exploration of opportunities for enhancement or change.
- 3.1.3 Within this document, significance is determined as follows in accordance with heritage values identified by Historic England in *Conservation Principles* (2008):
  - Evidential value: the potential of a place to yield evidence about the past
  - Historic value: the ways in which past people, events and aspects of life can be connected through a place to present – usually illustrative or associative
  - Aesthetic value: the ways in which people draw sensory and intellectual stimulation from a place
  - **Communal value**: the meanings of a place for the people who relate to it, or for whom it figures in their collective experience or memory
- 3.1.4 The following is a guide to comparative levels of significance:
  - Exceptionally significant: nationally and/or internationally significant aesthetic, cultural, evidential or communal significance; exceptional, unique, and intact features of highest quality; nationally and/or internationally important associations with people or events; the setting of the heritage asset is an intrinsic part of the overall significance and is largely intact and or well preserved; unquestionable group value
  - Highly significant: important historic or architectural features; high quality of
    workmanship; potential for nationally important archaeology; largely intact and/or rare
    examples of a building type or technique; the setting of the heritage asset makes an
    important contribution to the significance, values, and legibility of the heritage asset –
    change and alteration to the setting may be present, but evidential, historic, aesthetic
    and/or communal values remain; important group value
  - Significant: formal or aesthetic significance, architectural character or notable features, including areas with potential for significant enhancement; setting contributes to the





heritage asset's legibility, form and/or scale but includes extant alterations which have altered or diminished the special interest; some positive group value

- Low significance: little or no architectural or heritage significance or area of lost significance; the setting of the heritage has been extensively altered to the point where it has a very low value and further change to the setting
- Not significant: of no heritage interest
- **Detrimental**: features or areas that detract from a building's special significance

### 3.2 Architectural and Historic Significance

- 3.2.1 It should be noted that listed buildings are protected for their special architectural or historic interest therefore these elements of its significance are of particular importance.
- 3.2.2 50 Mornington Terrace is part of the row of houses originally named Friedenstein Terrace. It is a good example of speculative development of middle class housing during the mid-nineteenth century when there was significant housing demand for a growing population and general migration towards town and cities. Mornington Road was created on farm land on the edge of the small village of Camden immediately to the north of London. Camden was rapidly transforming from a small randomly set out historic village to a new late Georgian and Victoria town.
- 3.2.3 The ground floor retains some early detailing with early joinery including windows and shutters. The basement has been altered significantly and no early details remain. The interior if of LOW **SIGNIFICANT** architectural and historical value.
- 3.2.4 50 Mornington Terrace has **SIGNIFICANT** architectural, historic and aesthetic value as part of the terrace, originally designed as a single, architecturally uniform, row of houses.
- The landscape and setting of Mornington Terrace have been substantially altered with the demolition of the semi-detached villas along the western side of Mornington Terrace with the widening of the rail cutting in 1900-1905. Demolition of eight houses (20-25 Mornington Terrace) at the southern end of the terrace following World War II bombing has also influenced the visual setting of 26-52 Mornington Terrace. Despite these considerable changes, Mornington Terrace still retains important architectural and communal values in its setting. The terrace is a strong visual element within the Camden Town with a long terrace of good quality early Victoria houses set within a relatively quiet residential road which is enhanced by tree planting and the surrounding roads of late Georgian and early Victorian houses.
- 3.2.6 Key elements which contribute to the setting of Mornington Terrace are; the architectural uniformity of the terraced building, the strong visual boundary between street and houses defined by railing to a significant number of properties; an early, probably original, York stone pavement in front of the terrace with a significant number of surviving coal chutes to coal cellars beneath the footpath. Also, the slightly elevated ground floor entrance and the use of 'Palacefront' design and the presence of original sash windows with some later historic significant alterations to the glazing format in some buildings, which provides valuable evidential value for





changes in window design as a result of fashion and technological development. The setting of 50 Mornington Terrace and the terrace as a whole is considered to make a **SIGNIFICANT** historic and aesthetic contribution to the heritage asset.

3.2.7 Mornington Terrace is recognised as a KEY VIEW in the London Borough of Camden, Camden Town Conservation Area.

### 3.3 Communal Significance

3.3.1 Mornington Terrace is valued because of the quality of the buildings and the immediate landscape and setting, and the contribution to the wider late Georgian and Early Victorian townscape of Camden which comprises Delancey Street, Albert Street, Mornington Place and Mornington Crescent with terraced houses in relatively quiet largely residential roads. These values contribute to the **SIGNIFICANT** communal value.

#### 3.4 Schedule of Significant Elements: 50 Mornington Terrace

- 3.4.1 The following schedules provide guidance on the heritage significance of the grade II listed 50 Mornington Terrace and forms the basis for the assessment of impact that follows in section 4 'Design Statement & Statement of Justification'. The schedule assesses those elements of the listed buildings that have Evidential, Historic, Aesthetic & Communal value and could be affected by the proposed works.
- 3.4.2 Since the scope and extent of the proposed work is limited, the schedule of significance has also been limited to building elements, which directly or indirectly might be considered to be impacted by the proposals. The broad grading of significance outlined in point 3.1.4 is used.

| Item<br>No. | Element                                    | Location              | Date    | Heritage<br>Values   | Significance | Description of Assessment of Significance   |  |
|-------------|--|-----------------------|---------|--|--------------|---|--|
| 1           | The setting<br>of the<br>heritage<br>asset | Mornington<br>Terrace | c. 1843 | Evidential,<br>Historic,<br>Aesthetic &<br>Communal<br>Value | Significant  | The setting of 50 Mornington Terrace has a shared or group value with the houses in the terrace building including 53-54, 55-56, The Edinburgh Castle and 58 Mornington Terrace.  The setting comprises views along Mornington Terrace, the view and appearance of the buildings within the townscape, and views across the rail cutting towards Park Village East. |  |





|   |          | <u> </u>   |         |                     |             | The setting is also concerned with                                      |
|---|----------|------------|---------|---------------------|-------------|---|
|   |          |            |         |                     |             | experiencing Mornington Terrace as                                      |
|   |          |            |         |                     |             | part of Camden's Georgian and   |
|   |          |            |         |                     |             | Victorian townscape. External   |
|   |          |            |         |                     |             | alterations to the building and   |
|   |          |            |         |                     |             | landscape, unless very carefully  |
|   |          |            |         |                     |             | executed could have a significant                                       |
|   |          |            |         |                     |             | detrimental impact on the   |
|   |          |            |         |                     |             | perceptual experience of visitors,                                      |
|   |          |            |         |                     |             | property owners and the local   |
|   |          |            |         |                     |             | community. In general, changes to                                       |
|   |          |            |         |                     |             | the setting should be of a character                                    |
|   |          |            |         |                     |             | and style that maintain or enhance                                      |
|   |          |            |         |                     |             | the visual and perceptual experience                                    |
|   |          |            |         |                     |             | of being in Mornington Terrace.   |
|   |          |            |         |                     |             | Examples of alterations and repair                                      |
|   |          |            |         |                     |             | which would enhance the setting include: reinstating railings along the |
|   |          |            |         |                     |             | boundary between the houses and   |
|   |          |            |         |                     |             | roadway footpath; reinstating   |
|   |          |            |         |                     |             | sections of missing cornice and   |
|   |          |            |         |                     |             | stucco details on the terraced  |
|   |          |            |         |                     |             | building, painting the external   |
|   |          |            |         |                     |             | stucco details, windows and railings                                    |
|   |          |            |         |                     |             | in a uniform colour to strengthen the                                   |
|   |          |            |         |                     |             | architectural uniformity of the   |
|   |          |            |         |                     |             | 'Palace-front' façade.  |
|   |          |            |         |                     |             | Installation of external secondary                                      |
|   |          |            |         |                     |             | glazing, even on a temporary basis                                      |
|   |          |            |         |                     |             | for approximately 10 years would  |
|   |          |            |         |                     |             | diminish the architectural uniformity                                   |
|   |          |            |         |                     |             | and provide a stark contrast to   |
|   |          |            |         |                     |             | historic fenestration and glazing.                                      |
|   |          |            |         |                     |             | Secondary glazing would give the  |
|   |          |            |         |                     |             | impression of modern windows being installed and would harm the         |
|   |          |            |         |                     |             | emotional experience for residents,                                     |
|   |          |            |         |                     |             | the local community, and visitors.                                      |
|   |          |            |         |                     |             |   |
|   |          |            |         |                     |             | Mornington Terrace is described as a 'Key View' in the Camden Town      |
|   |          |            |         |                     |             | Conservation Area.  |
| 2 | Building | Front      | c. 1843 | Evidential,         | Significant | Front Elevation   |
|   | Façade   | Elevations |         | Historic &          |             |   |
|   |          |            |         | Aesthetic<br>values |             | The front and north return elevation                                    |
|   |          |            |         | vaiues              |             | are fine examples of row houses built                                   |
|   |          |            |         |                     |             | with architectural uniformity using                                     |
|   |          |            |         |                     |             | visually defined, slightly larger                                       |
|   |          |            |         |                     |             | central and end blocks within the                                       |





| 3 | External<br>Windows<br>and Doors | Front elevation | c. 1843 | Evidential,<br>Historic &<br>Aesthetic<br>values | Significant<br>to Low<br>Significance | row to give the impression of a single building. The terrace was constructed to a good standard using uniform shaped and coloured yellow London Stock bricks and tuck pointed joints with stucco rustication at ground floor, a continuous balcony at first floor and door and window architraves and pediments  Lack of appropriate maintenance to a limited number of properties has resulted in the loss of the stucco cornice and loss of isolated stucco details. Repointing to all but one house in modern cement-sand mortars has harmed the special architectural interest.  Further alteration, repair and decoration should seek to enhance the original design, appearance and uniformity.  Basement Bedroom  The window to the front at basement level is a modern uPVC double-glazed replacement. It does however retain the traditional style and proportions of the original window.  Ground Floor Sitting Room  The sash window, shutters, and timber window architrave are existing early details. The sash window is large in size and elegant in design and characteristic of the later Georgian/early Victorian period. The window and shutters are operable and in good condition with minor distortion and wear. Alteration to the joinery in this room should be small in scale, reversible and preserve original details. |
|---|----------------------------------|-----------------|---------|--|---------------------------------------|---|
|---|----------------------------------|-----------------|---------|--|---------------------------------------|---|





| 4 | Room<br>interiors<br>(space,<br>proportions,<br>size and<br>scale) | Internal<br>rooms | c.1843 | Evidential,<br>Historic &<br>Aesthetic<br>values | Significant<br>to Low<br>Significance | Basement The interior of the room at basement level has been significantly altered during recent renovations of the property and no historic fabric remains visible.  Ground Floor The ground floor sitting room retains some early detailing including timber shutter and associated boxed. There is a simple cornice and skirting. |
|---|--|-------------------|--------|--|---------------------------------------|--|
|   |  |                   |        |  |                                       | skirting.  |

#### 3.5 Camden Town Conservation Area

- 3.5.1 Subdivided into two distinct character areas: the commercial high street to the northeast and the quieter, more formal residential area to the southwest, this part of Camden Town Conservation Area represents a phase of late urbanisation while it was subsumed into Greater London.
- 3.5.2 The Conservation Area is celebrated for its high proportion of C19th buildings, and there is an overall C19th architectural and historic character and appearance throughout.
- 3.5.3 Mornington Terrace is positioned at the edge of the Conservation Area, at which point the rhythm of façade frontages creates a strong contrast with the gap to the western side of road. Although not the original design intention, the railway cutting affords long, front on views of the terrace façade from the west, providing its strong visual linear frontage in addition to the oblique views which would have been the only view of the terrace had the villas to the western side of the road not been demolished. A high brick wall with stone copings now screens the railway cutting below.





### 4 Design Statement & Statement of Justification

4.1.1 The following section is a description of the proposed works with analysis of the impact of the proposals on the significance of the heritage asset (Impact Assessment) and justification for why the proposals should be granted Listed Building Consent.

#### 4.2 Noise Mitigation during Construction of HS2

- In constructing the scheme, HS2 will take all reasonable steps to ensure that noise does not 4.2.1 cause an adverse effect. However, there may be instances where construction noise may cause a material change in behaviour and/or attitude, e.g. avoiding certain activities during periods of intrusion; where there is no alternative ventilation, having to keep windows closed most of the time because of the noise; potential for sleep disturbance resulting in difficulty in getting to sleep, premature awakening and difficulty in getting back to sleep. Where this occurs noise insulation (or temporary re-housing) will be offered with the aim that noise from the construction of the Scheme does not give rise to significant adverse effects on health and quality of life. The threshold noise levels above which noise insulation would be offered to dwellings and other buildings lawfully used for residential purposes are defined within the HS2 Information Paper 'E23: Control of Construction Noise and Vibration'. This is a publicly document available at https://www.gov.uk/government/publications/hs2information-papers-environment
- 4.2.2 Initially eligibility for the scheme depends on the predicted noise level following the assessment undertaken as part of the environmental assessment. If the noise predictions indicated that a property is eligible, the offer of noise insulation or grant for noise insulation is being made and, if accepted and all necessary approvals obtained, the insulation will be installed before the start of works predicted to exceed the noise insulation criteria

# 4.3 Installation of Temporary Internal Secondary Glazing & Mechanical Ventilation Units

#### 4.3.1 Refer to design drawings:

| Floor    | Existing Arrangements          | Proposed details                 |  |  |
|----------|--------------------------------|----------------------------------|--|--|
| Basement | WPI Po66 NI -50A MT-EX-BS-J-01 | WPI Po66 NI -50A MT-PR-BS-J-01.1 |  |  |
|          |                                | WPI Po66 NI -50A MT-PR-BS-J-01.2 |  |  |





| Ground | WPI Po66 NI -50A MT-EX-GF-J-02 | WPI Po66 NI -50A MT-PR-GF-J-02.1 |
|--------|--------------------------------|----------------------------------|
|        |                                | WPI Po66 NI -50A MT-PR-GF-J-02.2 |

#### 4.4 Schedule of Proposed Works

4.4.1 Listed building consent is sought for the following works:

#### **Basement**

- a) One Sonair F+ unit (from Titon or similar) in the front bedroom, installed to the front external wall (Chapter 6, Figure 4);
- b) Temporary internal secondary glazing to one (1) window.

#### **Ground Floor**

- c) One Sonair F+ unit (from Titon or similar) in the front sitting room, installed to the front external wall (Chapter 6, Figure 5);
- d) Temporary internal secondary glazing to one (1) window.
- 4.4.2 Specialist contractors will provide Method Statements prior to installation.
- 4.4.3 A 106mm dia. hole will be core drilled through the existing external brick wall to allow a ventilation fan to be installed within the room. Cut lines will be confined to bedding joints where possible to minimise impact to the fabric of the wall and to facilitate re-insertion of bricks after the unit is removed.
- 4.4.4 As few bricks as possible will be carefully removed from the wall to allow insertion of a plain metal grille, behind which the duct from the fan unit will be concealed. The internal fan unit will be located just above floor level within the front facing living room.
- 4.4.5 On removal of the fan unit, the opening will be repaired using reclaimed London stock brick to match the existing and rendered to match the surrounding existing stucco finish.
- 4.4.6 Refer to following elevation drawings for indicative location of the mechanical input ventilation fan:
  - WPI Po66 NI-50A MT-EX-EL-01

### 4.5 Design Proposal

Photographs illustrating the existing windows are included at the end of this section.





- 4.5.1 The proposed design for secondary glazing and mechanical ventilation has been prepared by historic building professionals and HS2. The design is intended to meet the functional requirements of providing additional ventilation within the residential home (50 Mornington Terrace) whilst minimising the impact on the significance of the heritage asset and inconvenience to the resident. The proposal for internal secondary glazing and mechanical ventilation includes the following aspects:
- 4.5.2 **Noise mitigation**. Secondary glazing and mechanical ventilation are temporary measures to mitigate increased noise levels created by construction of the HS2 railway.
- 4.5.3 **Window design and materials**: The secondary glazing windows will be manufactured from aluminium with a polyester powder coating or similar and be installed into a new timber subframe which is fixed to the existing wall surface or window reveal. The windows will be glazed with 8.8 mm laminated glass for acoustic attenuation. Slim profile lift out glazing units will be glazed with 6.4 mm acoustic laminated glass.
- Minimising external visual impact on existing windows: Secondary glazing will be installed internally on the proposed windows. The position of the secondary glazing frame will align with the original window frame and sash positions to minimise visual impact when viewed externally. The secondary glazing must be set back internally from the original window position to achieve the desired acoustic performance and minimise noise levels from the HS2 works. When viewed externally, the secondary glazing might be seen by a discerning person when viewed obliquely. Some reflection on the secondary glazing may also be evident from the original windows. The external visual impact on the significance of the heritage asset will be low to very low and is an accepted consequence of installing secondary glazing into historic buildings. This minor visual impact will be removed when the secondary glazing is removed at the completion of the HS2 construction works. The mechanical input fan will be installed though the external wall to the front of the building as shown in the application drawings. Externally, as few bricks as possible will be removed.
- 4.5.5 **Reducing internal visual impact for the residents:** The secondary glazing frame section size is minimised to ensure original glazing sightlines are maintained. The secondary glazing frame will be powder coated white or to match the existing surrounding joinery.
- 4.5.6 **Maintaining existing window functionality:** All existing windows will remain operable with the secondary glazing installed. Existing sash windows can be cleaned and maintained.
- 4.5.7 **Fixing the secondary glazing:** a secondary glazing timber subframe will either be fixed to existing plastered window reveals or existing timber window reveals. The secondary glazing will then be screw fixed to the sub-frame.
- 4.5.8 **Shutters**: Where the secondary glazing requires existing timber shutters to be fixed 'open' into place, this will be a temporary measure to allow the secondary glazing to operate and will be reversed once the secondary glazing has been removed. In these circumstances, the secondary glazing frame will be fixed into place with acrylic caulking to seal any air gaps. On removal of





the units the caulking will be removed and existing surfaces will be made good. The shutters will be returned to their existing operability.

- 4.5.9 **Colour scheme:** The secondary glazing, glazing insert and new sub-frames will be finished in white on all visible faces or will match the existing surrounding joinery colour. This design approach will minimise visual impact internally.
- 4.5.10 **Minimising heat distortion**. Slot ventilators in the secondary glazing frame will minimise heat build-up between the secondary glazing and original windows wherever possible. This will minimise risk of distortion in the original joinery caused by excessive heat build-up. The resident has been made aware that where a slim profile solution is to be installed (within the staff bead), trickle vents will not be provided.
- 4.5.11 Mechanical Ventilation Fan Unit (Sonair): Installation of the mechanical input fan will require a 106mm (dia.) hole to be drilled through the external wall. The external wall is composed of yellow London stock brickwork and constructed in a lime mortar and finished internally with a plain lime wall plaster. The fan will be installed just above floor level at ground floor and includes push button controls to increase or decrease the volume of air entering the building; ventilation rates can be adjusted from 28m3/h to 225m3/h. The device can be turned off when required. The unit is powered using a simple 13amp cable which is routed to the closest 13amp socket. When switched off and during power cuts, the device provides 2882mm2 EA of background ventilation. For details and dimension of the Sonair F+ see specification included within this application.
- 4.5.12 **External Grille:** It is proposed to install a plain metal grille to be flush with the external wall in keeping with the historic character of the building. The external grille will be simply detailed and painted to match the existing external wall colour. Where is it proposed to be set within an un-rendered brick wall, the grille will be finished in black.
- 4.5.13 **Temporary installation**: On completion of the HS2 construction works the secondary glazing and input fan will be removed and the hole through the masonry wall will be repaired. Secondary glazing will be removed from the property and recycled. Fixings will be carefully removed to prevent damage to existing building fabric and joinery:
  - Fixing holes in the existing timber joinery will be filled with a good quality wood filler and finished flush with the surrounding joinery surface. The internal face of the existing window joinery will then be redecorated to match the existing colour.
  - 2. Fixing holes in the existing plastered window reveals will be filled with a good quality plaster filler and finished flush with the surrounding wall surface. The internal window reveal and existing window joinery where the secondary glazing was installed will be redecorated to match the existing colour.

.

<sup>&</sup>lt;sup>8</sup> Titon Test Report No. MDoo15b dated o8/11/2007 for Sonair F+ with G2 filter.





- 3. Where shutters have been pinned back into place these will be returned to their existing operability.
- 4.5.14 Bricks which have been drilled through for the mechanical ventilation duct will be cut out and replaced with salvaged bricks to match the existing size, colour and appearance, installed using a lime mortar to match existing. New mortar joints will match the surrounding existing joints in colour and profile. Internally the wall plaster will be repaired and painted to match the existing wall. The wall will be redecorated internally.

#### 4.6 Impact Assessment

- 4.6.1 The following section provides summary of the impact of the proposal on the significance of the heritage asset.
- 4.6.2 This section also provides a statement of the national and local planning policies which the proposal has complied with.
- 4.6.3 The following categories of impact (harm) are used:
  - HIGH Work that is expected to have a significant detrimental impact on the heritage fabric
    and the setting of the heritage asset, e.g. important historic or architectural features will be
    permanently removed and/or work will alter the character of primary architectural or historic
    elements and work to the building exterior which significantly alters the experience of the
    setting.
  - MEDIUM Work that will have some impact on architectural or historic details e.g. surviving
    decorative details may be disturbed in areas that through previous alterations have already
    suffered partial loss, or new work will conceal original features and reduce legibility but is
    potentially reversible. Work may also cause harm to the setting of the heritage asset possibly
    in a smaller localised way.
  - LOW Work in areas where, (1) because of earlier alterations there is little remaining fabric of historic or architectural significance or (2) the work will be managed with minimal disruption to the existing building and will have minimal impact on the significance of the heritage asset. Work may include small localised change that does not impact on the setting of the heritage asset.
  - **NEGLIGIBLE** Work to the heritage asset that has very slight change to the significance and has no impact on the setting of the heritage asset.
  - NO CHANGE the proposals have no impact on the significance or setting of the heritage asset.
  - **ENHANCEMENT** Work that is expected to result in significant overall enhancement to the heritage asset and/or setting of the heritage asset.

### 4.7 Impact of the Proposed Design

4.7.1 The proposed design has a **LOW** impact on the special interest and character of the grade II listed 50 Mornington Terrace. The installation of secondary glazing and mechanical ventilation will introduce minor harm on the fabric and minor harm to the setting of 50 Morning Terrace





and Camden Town Conservation Area. The proposed works have been mitigated by the following considerations:

#### 4.7.2 50 Mornington Terrace:

- The visual impact of the external ventilation grille will be minimised by careful and consistent positioning in relation to the other existing openings in the palace front wall. The external ventilation grille will be finished in a traditional fashion to match the existing external wall finish. Where it is proposed within an un-rendered brick wall, the grille will be finished in black.
- 2. The installation of fan units will provide additional levels of ventilation, allowing continued residential use of 50 Mornington Terrace as a residential dwelling. The proposed design takes all reasonable steps to improve ventilation and ensure the health and well-being of the residents, whilst maintaining minimum levels of disruption to the existing building fabric.
- 3. The position of the internal secondary glazing frame will align with the original window frame and sash positions to minimise visual impact when viewed externally. The external visual impact on the significance of the heritage asset is an accepted consequence of installing secondary glazing into historic buildings.
- 4. Primary elements of significance will remain unaffected.

#### 4.7.3 Camden Town Conservation Area:

- The external ventilation grille will be set within the stucco at ground and basement floors. This will be kept to the minimum size and where possible the grille will be positioned in line with other existing openings.
- 2. The impact will be negligible to the overall streetscape of Mornington Terrace and adjacent roads. Should a substantial number of other properties require mechanical ventilation there may be cumulative impacts of the presence of many other similar grilles on the group of listed buildings, although these will where appropriate be sited consistently and unobtrusively to minimise harm.
- 4.7.4 The installation of both secondary glazing and mechanical ventilation is temporary and reversible. Internal and external building fabric will be restored to its previous condition following the removal of both.
- 4.7.5 The overall level of harm caused by the proposed works can be assessed by measuring the impact of the proposals against the significance of the asset as shown in Table 1 below.





| IMPACT                       | HIGH          | MEDIUM                        | LOW      | NEGLIGIBLE | NO<br>CHANGE | ENHANCEMENT      |
|------------------------------|---------------|-------------------------------|----------|------------|--------------|------------------|
| EXCEPTIONALLY<br>SIGNIFICANT | Major adverse | Major<br>adverse              | Moderate | Minimal    | Neutral      | Major Beneficial |
| HIGHLY<br>SIGNIFICANT        | Major adverse | Major/<br>moderate<br>adverse | Minimal  | Neutral    | Neutral      | Major Beneficial |
| SIGNIFICANT                  | Major adverse | Moderate                      | Minimal  | Neutral    | Neutral      | Beneficial       |
| NOT<br>SIGNIFICANT           | Moderate      | Minimal                       | Minimal  | Neutral    | Neutral      | Neutral          |
| DETRIMENTAL                  | Minimal       | Minimal                       | Neutral  | Neutral    | Neutral      | Minimal          |

Table 1: In order to measure the harm caused by the proposed works, the impact can be measured against the significance of the asset.

- 4.7.6 Using the table above, it can be seen that the proposed works will result in **minimal** harm which indicates there will be 'less than substantial harm' caused.
- 4.7.7 The proposal is compliant with:
  - 1. National Planning Policy Framework policies 180, 189, 193 and 196.
  - Camden Local Plan, adopted 2017, policies C1 'Health and wellbeing', D1 'Design' and D2 'Heritage'.
  - 3. Camden Development Policies 2010, policies DP24 'Securing high quality design' and DP25 'Conserving Camden's heritage' and DP26 'Managing the impact of development on amenity'.

#### 4.8 Justification

- 4.8.1 Internal secondary glazing has been instated to properties identified as being impacted by noise caused by construction during the HS2 scheme. The resident of this property has requested mechanical ventilation to avoid adverse increases in internal temperatures and atmospheric moisture.
- 4.8.2 The design meets the functional requirements of providing additional ventilation within the residential property whilst introducing only minor harm to the heritage asset and minimising





inconvenience to the resident. The design set out in chapter 4.5 seeks to minimise harm as far as possible with this solution.

- 4.8.3 The proposals are in line with HS2's commitments to provide noise attenuating ventilation to listed properties.
- 4.8.4 The proposed works will be reversible following completion of construction works.





# 5 Conclusion

- 5.1.1 The assessment of the installation of the proposed temporary secondary glazing and mechanical input ventilation fan concludes that this will introduce minimal harm to asset of 50 Mornington Terrace, its setting and Conservation Area as a whole.
- 5.1.2 Measures have been taken to minimise the impact of the works to all relevant assets, including considerations to the installation methodology, positioning and design of the fan units and the external grille.
- 5.1.3 The installation of the secondary glazing and mechanical ventilation fan is temporary and reversible. Internal and external building fabric will be restored to its previous condition following the removal both.





# 6 Photographs

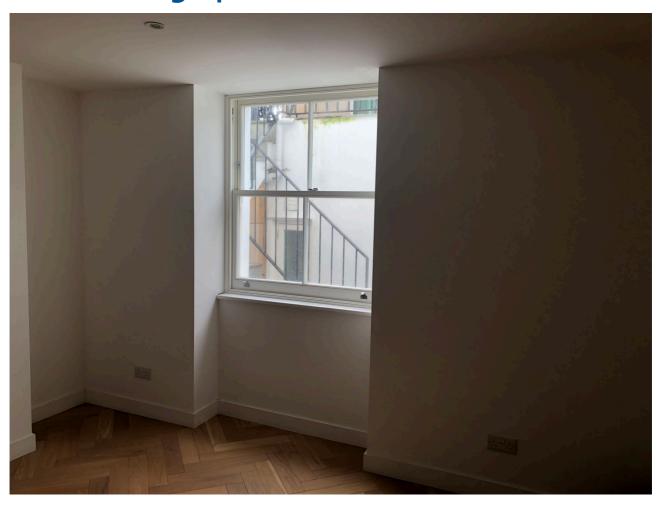


Figure 4: Internal view of the front external wall at basement level







Figure 5: Internal view of the front external wall at ground floor





### Appendix 1: Historic Maps



Figure A1: 1876-1879, Ordnance Survey map. (Groundsure, ref: GS-5244828). Copyright: Ordnance Survey 100035207





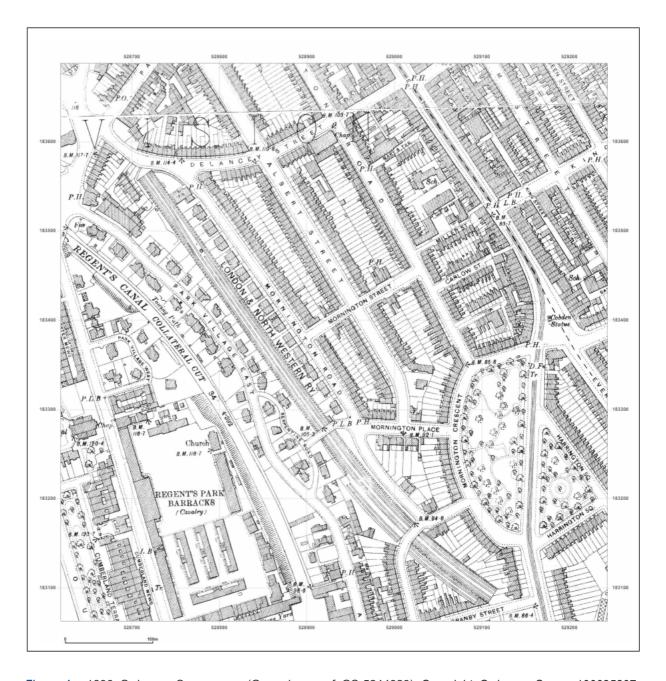


Figure A2: 1896, Ordnance Survey map. (Groundsure, ref: GS-5244828). Copyright: Ordnance Survey 100035207





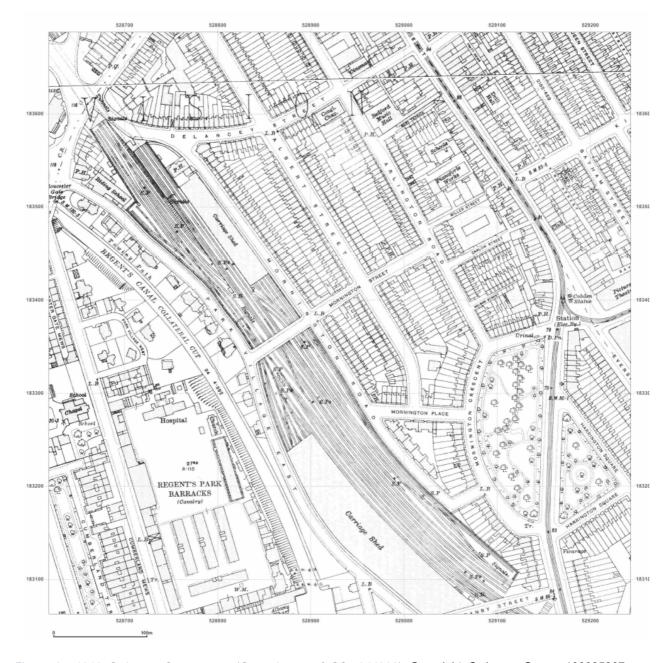


Figure A3: 1916, Ordnance Survey map. (Groundsure, ref: GS-5244828). Copyright: Ordnance Survey 100035207





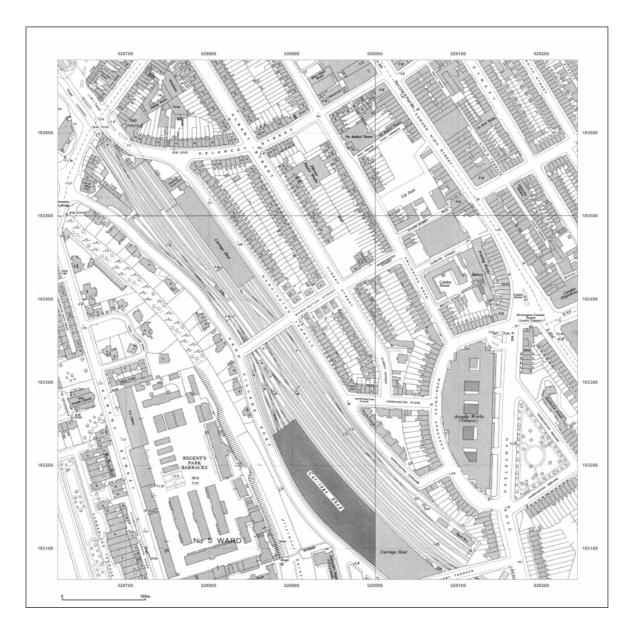


Figure A4: 1952-54, Ordnance Survey map. (Groundsure, ref: GS-5244828). Copyright: Ordnance Survey 100035207







Figure A5: 1971, Ordnance Survey map. (Groundsure, ref: GS-5244828). Copyright: Ordnance Survey 100035207