




- NOTES**
1. This drawing is copyright of Camlins and may not be reproduced in whole or in part without the written permission of Camlins.
 2. Do not scale from this drawing.
 3. All dimensions in millimetres unless otherwise shown.
 4. All levels in metres above Ordinance Datum (mAOD) unless otherwise shown.
 5. All dimensions to be checked on site and any discrepancies reported to CA before pricing / work starts.
 6. Any ambiguities or discrepancies within this drawing or between this drawing and any other information given elsewhere must be reported to Camlins and the CA for clarification before pricing / work proceeds.
 7. All drawings to be read in conjunction with other Camlins drawings and specification and with relevant Engineer's and Architect's work packages as appropriate.
 8. All works carried out in accordance with the latest British Standards and appropriate codes of practice as a minimum.

- KEY**
- Paving Areas Actively Drained
Impermeable surfacing laid to falls.
Yard gullies and slot drains with gulleys located approx. as shown.
 - Small Garden Paths
Paths within the garden areas drained with cross falls into gravel filled french drains in adjacent soft areas.
French drains nom. 300 x 300 single size aggregate filled trench, blinded over with geotextile, soil and planting.
 - Planted Areas
Areas of planting do not require active drainage.
Rain falling on these areas will percolate down through the soil / subsoil.
 - Approx. location of gully (G1/G2)
 - Galvanised Steel Slot drain (Slot 1), gully as shown
 - Drainage Channel, gully as shown (D1/D2)

Architectural and Structural information shown is indicative only.
Contractor external designer to co-ordinate with current Architectural and Structural information.
For exact details on foundations / Build-ups / Structural information etc please refer to Engineers and Architects details.

Revisions

Rev.	Date:	Description:	Revised by:	Checked by:
1	14/04/2016	General update of Architectural information, including building layout, lightwell removal and reduction to break out panel and P1 paving.	LC	PSS

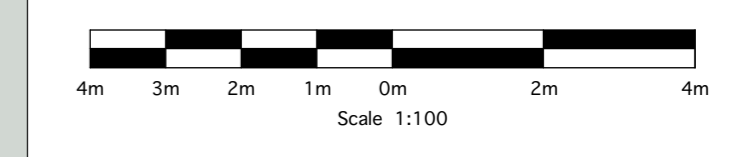

EMPLOYERS REQUIREMENTS

FITZJOHNS AVENUE
PEGASUS LIFE

General Arrangement - Schematic Drainage Plan

Drawing No.:	Revision:	Scale:	Date:
LL489-400-0041	1	1:100@A1	18.03.2016

Drawn by: JT Checked by: PSS