

- NOTES**
1. This drawing is copyright of Camlins and may not be reproduced in whole or in part without the written permission of Camlins.
  2. Do not scale from this drawing.
  3. All dimensions in millimetres unless otherwise shown.
  4. All levels in metres above Ordnance Datum (mAOD) unless otherwise shown.
  5. All dimensions to be checked on site and any discrepancies reported to CA before pricing / work starts.
  6. Any ambiguities or discrepancies within this drawing or between this drawing and any other information given elsewhere must be reported to Camlins and the CA for clarification before pricing / work proceeds.
  7. All drawings to be read in conjunction with other Camlins drawings and specification and with relevant Engineer's and Architect's work packages as appropriate.
  8. All works carried out in accordance with the latest British Standards and appropriate codes of practice as a minimum.

- KEY**
- Boundary
  - Extent of planting areas which may require irrigation using hose pipe
  - Contractor to allow for 8No. bib tap watering points installed to enable future watering of planting and other maintenance. Including two on high levels, exact location to be agreed by architect.
  - Proposed trees  
Allow for newly planted trees to require 40L per day
  - Lt** Liriodendron tulipifera fastigiata (Tulip Tree) 40-50cm girth stock
  - Sa** Sorbus aucuparia (Rowan) 40-50cm girth stock
  - Cb** Carpinus betulus 'Fastigiata' (Fastigate Hornbeam) 40-50cm girth stock
  - Bp** Betula pendula (Silver Birch) 40-50cm girth stock
  - Si** Sorbus intermedia (Swedish Whitebeam) 40-50cm girth stock
  - Pp** Prunus padus (Bird Cherry) 40-50cm stock
  - Pc** Pyrus calleryana 'Chanticleer' 40-50cm stock

Extensive green roof areas  
No irrigation required after initial establishment.

Extensive green roof areas  
No irrigation required after initial establishment.

**Contractor to be responsible for watering of plants as necessary through DLP in order to keep plants healthy and to aid establishment.**

**Contractor to be responsible for determining frequency of watering**


Architectural and Structural information shown is indicative only.  
Contractor external designer to co-ordinate with current Architectural and Structural information.

All growing medium, drainage and planting on roof are to be part of contractor design for roof system. Contractor design for roof system to determine future maintenance.

For exact details on foundations / Build-ups / Structural information etc please refer to Engineers and Architects details.

**Revisions**

Rev:	Date:	Description:	Revised by:	Checked by:
1	14/04/2016	General update of Architectural information, including building layout, lightweight removal and reduction to break out panel and P1 paving. Note addition.	LC	PSS

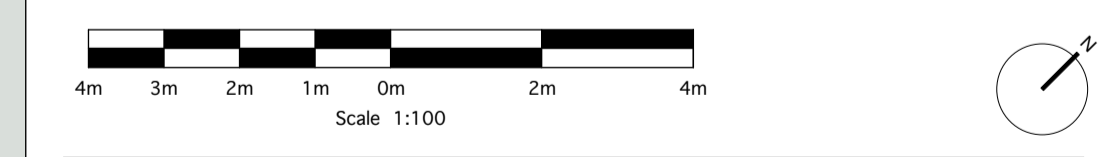

**EMPLOYERS REQUIREMENTS**

**FITZJOHNS AVENUE**  
PEGASUS LIFE

**General Arrangement - Irrigation Requirements**

Drawing No:	Revision:	Scale:	Date:
LL489-400-0065	1	1:100@A1	18.03.2016

Drawn by: JT  
Checked by: PSS