

GBx Outdoor Podium

Weatherproof outdoor contactless unit

GBx Outdoor Podium - Small Backboard



GBx Outdoor Podium - Large Backboard




GBx Outdoor Podium


Weatherproof outdoor contactless unit

Overall unit dimensions

GBx Outdoor Podium - Small Backboard

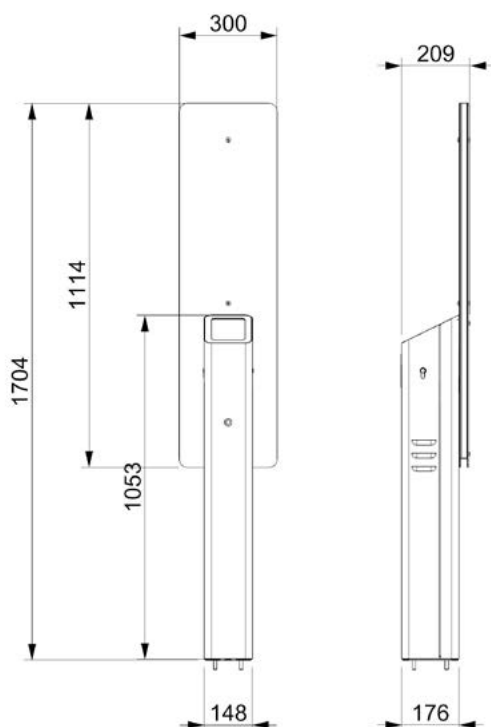

GBx Outdoor Podium - Large Backboard

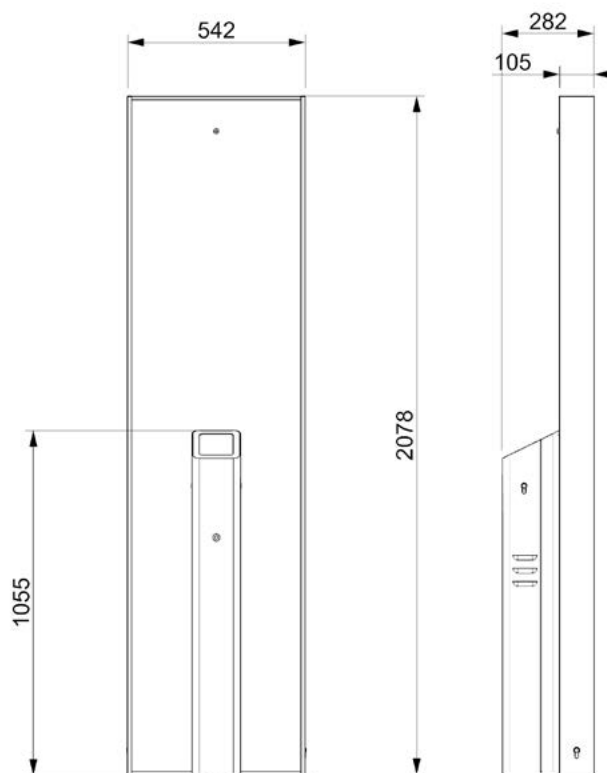


Size and Weight

Individual element dimensions	
- Outdoor Podium (no backboard)	1053 x 148 x 176mm
- Small backboard	1114 x 300 x 6mm
- Large backboard	2072 x 534 x 6mm
Weight	
- GBx Outdoor Podium (Small Backboard)	TBC kg
- GBx Outdoor Podium (Large Backboard)	TBC kg

GBx Outdoor Podium

Weatherproof outdoor contactless unit

Power install diagram

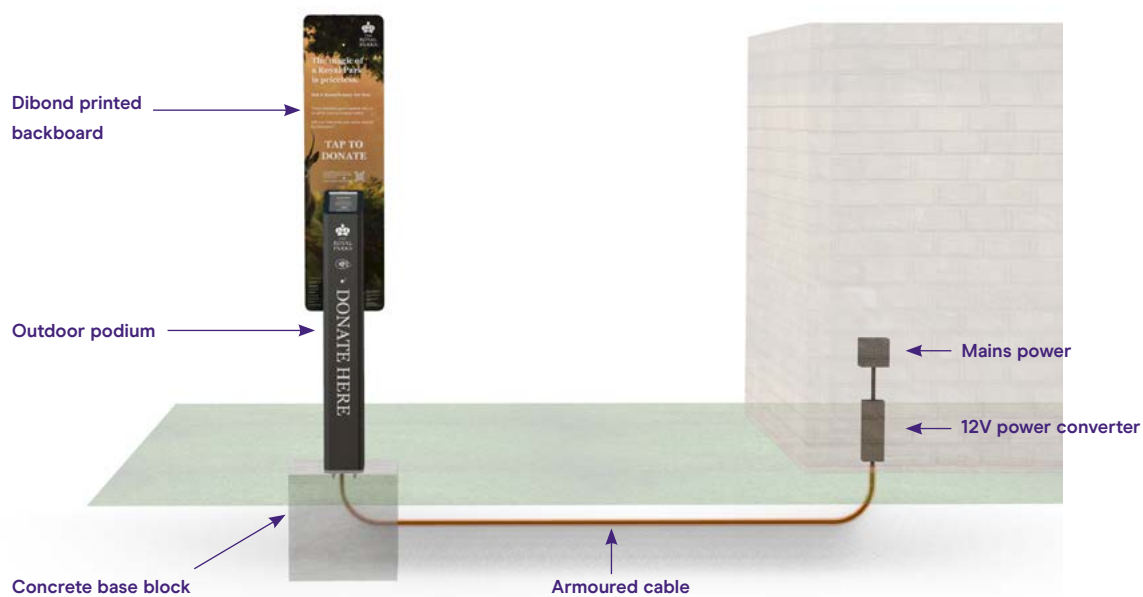


Power install details

Concrete base block (Small backboard)	400 x 400 x 400mm (Approximate guidance only - subject to local contractor, ground substrate, obstacles etc.) Suitable conduit to house power cable with pull through cord to aid cable routing
Armoured cable	2 core or 3 core (if earth is required) circular section armoured cable Max length 100m at 12V
Power Converter	12V IP65 100W switching power supply for harsh environment

GBx Outdoor Podium

Weatherproof outdoor contactless unit

Unit parts list

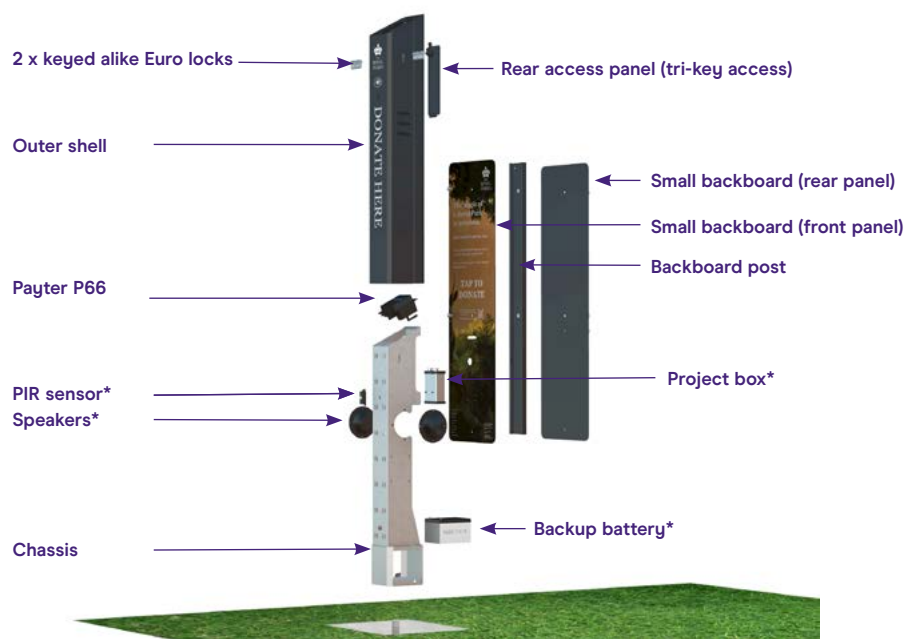

*Only if specified

Details

Also see product specifications for GBx Integrated

Security

The Outdoor Podium has double 'keyed alike' Euro locks to secure the outer shell onto the chassis of the unit.

The rear access panel is revealed by unbolting and removing the backboard assembly.

A tri-key is provided to unlock the rear access panel.

The Payter unit can be accessed via the rear access panel, but not removed entirely from the podium without unlocking and sliding off the outer shell for security reasons.

The glass is 8mm toughened safety glass which is replaceable should it get damaged.