10 Gloucester Gate Schedule of interior details

Ground floor



Type A cornice

Entrance hall

To be retained, carefully repaired and repainted



Type B cornice

Library

To be retained, carefully repaired and repainted

Cornice schedule



Type A cornice

Stairwell

To be retained, carefully repaired and repainted



Type B cornice

Dining room

First floor





Stairwell

To be retained, carefully repaired and repainted



Type C cornice

Drawing room West

To be retained, carefully repaired and repainted



Type C cornice

Drawing room East

Second floor



Type A cornice

Stairwell

To be retained, carefully repaired and repainted



Type D cornice

Master bathroom

To be retained, carefully repaired and repainted

Cornice schedule



Type D cornice

Master bedroom

To be retained, carefully repaired and repainted



Type D cornice

Walk in closet

Third floor







Stairwell

Type E cornice to be installed



Type E cornice

Bedroom B

To be retained, carefully repaired and repainted

Bedroom A

No cornice



Type E cornice

Bathroom B

To be retained, carefully repaired and repainted

Type E cornice

Bathroom A

To be retained, carefully repaired and repainted




Bedroom C

No cornice

Cornice schedule

Ground floor

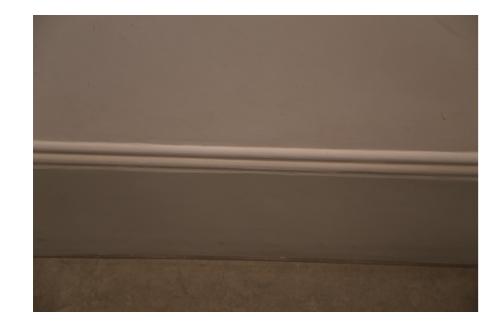

Type A skirting

Entrance hall

To be retained, carefully repaired and repainted



Type B skirting

Library

To be restored to original condition





Type A skirting

Stairwell

To be retained, carefully repaired and repainted



Type A skirting

Stair

To be retained, carefully repaired and repainted



Type B skirting

Dining room

To be restored to original condition

Skirting schedule

First floor





Stairwell

To be retained, carefully repaired and repainted



Type C skirting

Drawing room West

To be restored to original condition



Type C skirting

Drawing room East

To be restored to original condition

Second floor



Type D skirting

Stairwell

To be retained, carefully repaired and repainted



Type D skirting

Master bathroom

To be retained, carefully repaired and repainted

Skirting schedule



Type D skirting

Master bedroom

To be retained, carefully repaired and repainted



Type D skirting

Walk in closet