

FloodSmart



Flood Risk Assessment

Site Address

43a Redington Road
London
NW3 7RA

Date

2021-07-28

Report Status

FINAL

Grid Reference

525754E, 185828N

Site Area


0.11

Report Prepared for

Joelle Fuss
20 Fitzjohns Avenue
London
NW3 5NA

Report Reference

75105R1

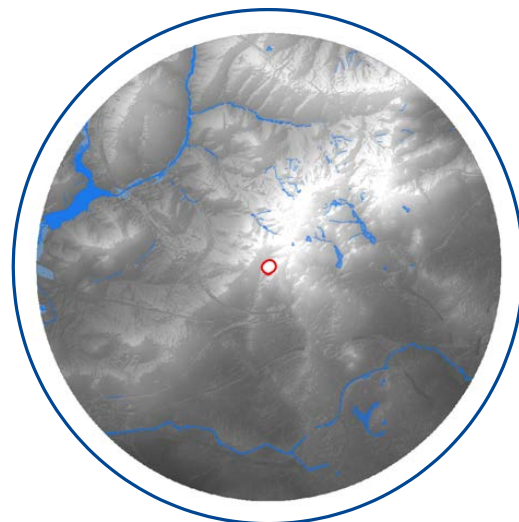

RISK - Very Low

The Site is located within fluvial and tidal Flood Zone 1 (low probability), and within an area defined as being at Very Low risk. The Site has a Very Low risk of surface water flooding and a Negligible risk of groundwater flooding and flooding from artificial (reservoirs, canals, and sewers) sources.

Report Author

James Robinson
Consultant

Report Checker & Reviewer

Alan White
Principal Consultant

GeoSmart Information Ltd
Suite 9-11, 1st Floor, Old Bank Buildings,
Bellstone, Shrewsbury, SY1 1HU
+44(0)1743 298 100
info@geosmartinfo.co.uk
www.geosmartinfo.co.uk

1. Executive summary



A review has been undertaken of national environmental data sets to assess the flood risk to the Site from all sources of flooding in accordance with The National Planning Policy Framework (NPPF) (2019) and National Planning Practice Guidance (NPPG) (2014). A site-specific flood risk assessment, to assess the flood risk to and from the development Site, is provided within this concise interpretative report written by an experienced GeoSmart consultant. Baseline flood risk and residual risks that remain after the flood risk management and mitigation measures are implemented are summarised in the table below.

Site analysis

Source of Flood Risk	Baseline	After Mitigation
River (fluvial) and Sea (coastal/tidal)	Very Low	N/A
Surface water (pluvial) flooding	Very Low	N/A
Groundwater flooding	Negligible	N/A
Other flood risk factors present	No	N/A
Is any other further work recommended?	Yes	Yes (see below)

N/A = mitigation not required

Summary of existing and proposed development

The Site is currently used within a residential capacity. Development proposals comprise a single storey rear extension including a roof terrace, two-storey side infill extension and basement extension including a conversion of the garage into a habitable room occupying the lower and ground floor part of the property. Site plans are included within Appendix A.

Summary of flood risks

The flood risks from all sources have been assessed as part of this report and are as follows:

According to the Environment Agency's (EA) Flood Map for Planning Purposes, the Site is located within a fluvial Flood Zone 1 (low probability).

According to the EA's Risk of Flooding from Rivers and Sea (RoFRS) map, which considers the type, condition and crest height of flood defences, the Site has a Very Low risk of flooding from Rivers and the Sea.

According to the EA's Risk of Flooding from Surface Water (pluvial) flood mapping, the Site has a Very Low risk of pluvial flooding.

Groundwater Flood Risk screening data indicates there is a Negligible risk of groundwater flooding at the surface in the vicinity of the Site during a 1 in 100 year event. The risk may be higher for below ground infrastructure and the basement, although the geological setting at the site suggests that groundwater is unlikely to be an issue at the Site.

The risk of flooding from artificial (man-made) sources such as reservoirs, sewers and canals has been assessed:

- The EA's Risk of Flooding from Reservoir map confirms the Site is not at risk of reservoir flooding.
- Ordnance Survey (OS) data confirms there are no canals near to the Site.
- A sewer flooding history search was undertaken with the utility provider and using the Strategic Flood Risk Assessment (URS, 2014). This confirms no recorded incidences of sewer flooding at or within the vicinity of the Site

The risk of flooding from artificial sources is considered to be Negligible.

The risk to the development has been assessed over its expected 100 year lifetime, including appropriate allowances for the impacts of climate change. More extreme weather events could increase the risk to the Site from increased potential for surface water / groundwater flooding. Site specific assessment indicates risk to the Site will not increase significantly and appropriate mitigation measures are proposed.

Recommendations / Next steps

Recommendations for mitigation are provided below, based upon the proposed development and the flood risk identified at the Site:

The regular maintenance of any drains surrounding/on the Site should be undertaken to reduce the flood risk.

GeoSmart have prepared a separate surface water drainage strategy (ref: 74608.02) to ensure surface water runoff can be managed effectively over the lifetime of the proposed development.

Although there is a Negligible groundwater flood risk at the Site, due to the proposed basement development the following mitigation measures could be considered:

- Waterproof tanking of the basement and consideration of a sump and pump to extract any flood water.

GeoSmart recommend the mitigation measures discussed within this report are considered as part of the proposed development where possible and evidence of this is provided to the Local Planning Authority as part of the planning application.

2. Introduction



Background and purpose

A site-specific flood risk assessment has been undertaken, to assess the flood risk to and from the development Site. This assessment has been undertaken by firstly compiling information concerning the Site and the surrounding area. The information gathered was then used to construct a 'conceptual site model', including an understanding of the appropriateness of the development as defined in the NPPF (2019) and the source(s) of any flood risk present. Finally, a preliminary assessment of the steps that can be taken to manage any flood risk to the development was undertaken.

This report has been prepared with reference to the NPPF (2019) and NPPG (2014).

"The National Planning Policy Framework set out the Government's planning policies for England and how these are expected to be applied" (NPPF, 2019).

The NPPF (2019) and NPPG (2014) promote a sequential, risk based approach to the location of development. This also applies to locating a development within a Site which has a variable risk of flooding.

"This general approach is designed to ensure that areas at little or no risk of flooding from any source are developed in preference to areas at higher risk. The aim should be to keep development out of medium and high risk flood areas (Flood Zones 2 and 3) and other areas affected by other sources of flooding where possible" (NPPG, 2014).

The purpose of this report is to provide clear and pragmatic advice regarding the nature and potential significance of flood hazards which may be present at the Site.

Report scope

In accordance with the requirements set out within NPPG 2014 (Paragraph: 030 Reference ID: 7-030-20140306), a thorough review of a commercially available flood risk report and EA supplied data indicating potential sources of flood risk to the Site from rivers and coastal sources, surface run-off (pluvial), groundwater and reservoirs, including historical flood information and modelled flood extent. Appropriate measures are recommended to manage and mitigate the flood risk to the property.

Information obtained from the EA and a review of the London Borough of Camden Strategic Flood Risk Assessment (SFRA) (URS, 2014) has been used to ascertain local flooding issues and, where appropriate, identify information to support a Sequential and/or Exception test required as part of the NPPF (2019).

The existing and future flood risks to and from the Site from all flood sources is assessed in line with current best practice using the best available data. The risk to the development has been assessed over its expected lifetime, including appropriate allowances for the impacts of climate change. Residual risks that remain after the flood risk management and mitigation

measures are implemented, are considered with an explanation of how these risks can be managed to keep the users of the development safe over its lifetime.

An indication of whether the Site will potentially increase flood risk elsewhere is provided, including where the proposed development increases the building footprint at the Site. A drainage strategy to control runoff can be commissioned separately if identified as a requirement within this report.

Report limitations

It is noted that the findings presented in this report are based on a desk study of information supplied by third parties. Whilst we assume that all information is representative of past and present conditions, we can offer no guarantee as to its validity and a proportionate programme of site investigations would be required to fully verify these findings.

The basemap used is the OS Street View 1:10,000 scale, however the Site boundary has been drawn using BlueSky aerial imagery to ensure the correct extent and proportion of the Site is analysed.

This report excludes consideration of potential hazards arising from any activities at the Site other than normal use and occupancy for the intended land uses. Hazards associated with any other activities have not been assessed and must be subject to a specific risk assessment by the parties responsible for those activities.

Datasets

The following table shows the sources of information that have been consulted as part of this report:

Table 1. Datasets consulted to obtain confirmation of sources of flooding and risk

Source of flooding	Datasets consulted				
	Commercial Flood Maps	SFRA*	Environment Agency	Utility Provider (Appendix B)	OS Data
Historical	X	X	X		
Fluvial/tidal	X	X	X		
Surface water (pluvial)	X	X	X		

Source of flooding	Datasets consulted				
	Commercial Flood Maps	SFRA*	Environment Agency	Utility Provider (Appendix B)	OS Data
Groundwater	X	X			
Sewer		X		X	
Culvert/bridges		X			X
Reservoir		X	X		

*The SFRA and local guidance have been used to inform this report as referenced in Section 6.

3. Site analysis




Site information

The Site is located in the London Borough of Camden in a setting of residential land use at National Grid Reference TQ 25754 85828. Site plans and drawings are provided in Appendix A.

According to OS data, using a 500 m buffer around the Site, the area is on a steep slope (Figure 1). It is noted that to the north land rises to c. 112.02 m above Ordnance Datum (AOD). To the west land falls to c. 86.22 mAOD, to the east land rises to c. 120.60 mAOD and to the south falls to c. 72.03 mAOD.

The general ground levels on the Site are between 93.54 and 98.34, falling to the northeast. This is based on EA elevation data obtained for the Site to a 1 m resolution with a vertical accuracy of ± 0.15 m (Appendix C).

Figure 1. Site Location and Relative Elevations (GeoSmart, 2021).

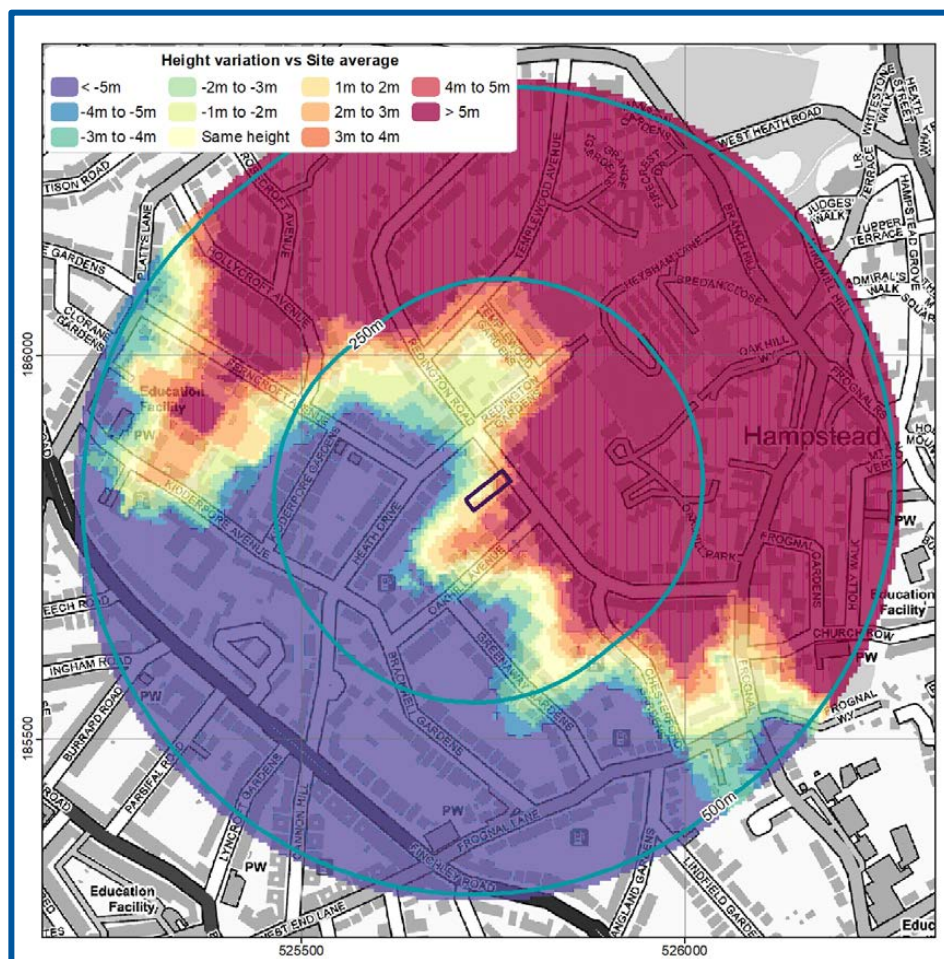

Contains Ordnance Survey data © Crown copyright and database right 2021

Development

The Site is currently used within a residential capacity. Development proposals comprise a single storey rear extension including a roof terrace, two-storey side infill extension and basement extension including a conversion of the garage into a habitable room occupying the lower and ground floor part of the property. Site plans are included within Appendix A.

The effect of the overall development will not result in an increase in number of occupants and/or users of the building but will not result in the change of use, nature or times of occupation. According to Table 2 of the NPPG (2014), the vulnerability classification of the existing development is More Vulnerable and proposed development is More Vulnerable. The estimated lifespan of the development is 100 years.

Hydrological features

According to Ordnance Survey (OS) mapping included in the following figure, there are no mapped surface water features within 500 m of the Site.

Figure 2. Surface water features (EA, 2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Environment Agency copyright and database rights 2021

Hydrogeological features

British Geological Survey (BGS) mapping indicates there is no superficial deposits (Figure 3) (BGS, 2021).


Figure 3. Superficial Geology (BGS, 2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Contains British Geological Survey materials © NERC 2021

BGS mapping indicates the underlying bedrock geology (Figure 4) consists of the Claygate Member- clay, silt and sand (CLGB) (BGS, 2021) and is classified as a Secondary (A) Aquifer (EA, 2021).

Figure 4. Bedrock Geology (BGS, 2021)

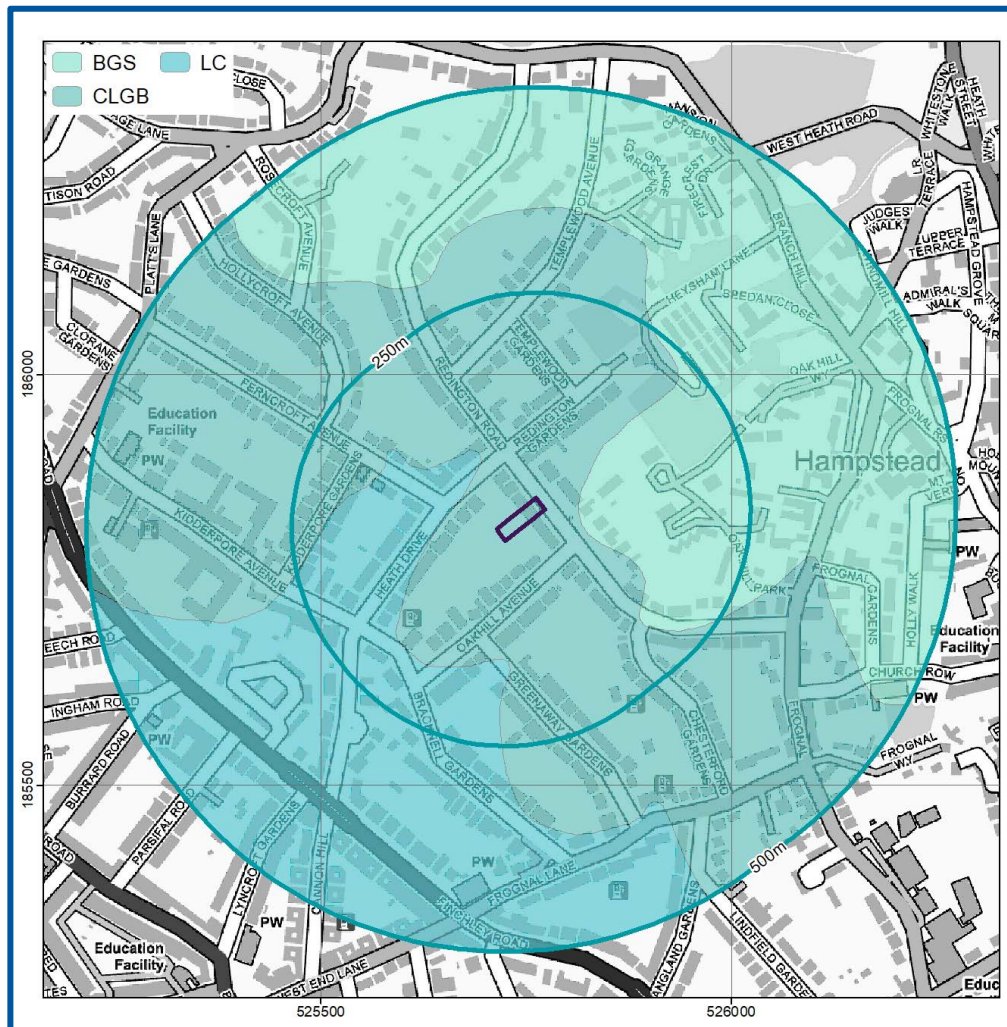

Contains Ordnance Survey data © Crown copyright and database right 2021
Contains British Geological Survey materials © NERC 2021

The Site does not lie within a groundwater Source Protection Zone (SPZ) (EA, 2021).

A review of the BGS borehole database (BGS, 2021) indicates the nearest and most relevant borehole (ref: TQ28NE104) is located approximately 280 m to the northeast of the Site at an elevation of 111.96 mAOD.

The borehole record indicates dirty sand to a depth of 1.22 m below ground level (bgl), overlying silty clayey sand to a depth of 12.80 mbgl, overlying silty grey clay to a depth of 13.41 mbgl, overlying silty sand to a depth of 15.24 mbgl, overlying grey silt (liquid) to a depth of 18.29 mbgl, overlying grey clay to a depth of 21.34 mbgl, where the borehole was terminated. Groundwater was not reported to have been encountered throughout the borehole log.

The hydrogeological characteristics suggest there is unlikely to be a shallow groundwater table beneath the Site.

4. Flood risk to the development



Historical flood events

According to the EA's historical flood map no historical flood events have been recorded at the Site (Figure 5) (EA, 2021).

Figure 5. EA historic flood map (2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Environment Agency copyright and database rights 2021

According to the SFRA, there have been no records of historic flooding at the Site (URS, 2014).

The purpose of historical flood data is to provide information on where and why flooding may have occurred in the past. The absence of any recorded events does not mean flooding has never occurred on-Site or that flooding will never occur at the Site.

Rivers (fluvial) / Sea (coastal/tidal) flooding

According to the EA's Flood Map for Planning Purposes (Figure 6), the Site is located within fluvial Flood Zone 1 and is therefore classified as having a Low probability of fluvial flooding. The Site lies approximately 3 km to the south east of the nearest land within Flood Zones 2 and 3.

Figure 6. EA Flood Map for Planning Purposes (EA, 2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Environment Agency copyright and database rights 2021

Guidance

As defined in the NPPF (2019):

Ignoring the presence of any defences, land located in a Flood Zone 1 is considered to have a Low probability of flooding, with less than a 1 in 1000 annual probability of fluvial or coastal flooding in any one year.

Development of all uses of land is appropriate in this zone (see glossary for terminology).

Flood risk including the benefit of defences

The type and condition of existing flood defences influence the 'actual' risk of fluvial flooding to the Site, albeit the long-term residual risk of flooding (ignoring the defences) should be considered when proposing new development.

According to the EA's Risk of Flooding from Rivers and the Sea (RoFRS) mapping (Figure 7), which considers the crest height, standard of protection and condition of defences, the flood risk from Rivers and the Sea is Very Low.

Figure 7. Risk of Flooding from Rivers and Sea map (EA, 2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Environment Agency copyright and database rights 2021

Surface water (pluvial) flooding

Surface water flooding occurs when intense rainfall exceeds the infiltration capacity of the ground and overwhelms the drainage systems. It can occur in most locations even at higher elevations and at significant distances from river and coastal floodplains.

According to the EA's Risk of Flooding from Surface Water (pluvial) flood mapping, the Site has a Very Low risk of pluvial flooding.


Guidance

According to EA's surface water flood risk map the Site is at:

- Very Low risk - chance of flooding of less than 1 in 1000 (0.1%).

The Site lies approximately 100 m south of the Site of areas at Medium and High risk where flood depths could be up to 0.9 m (Figure 8), however given the significant distance from the Site this is unlikely to affect the Site.

Figure 8. EA Medium surface water flood risk map (EA, 2021)

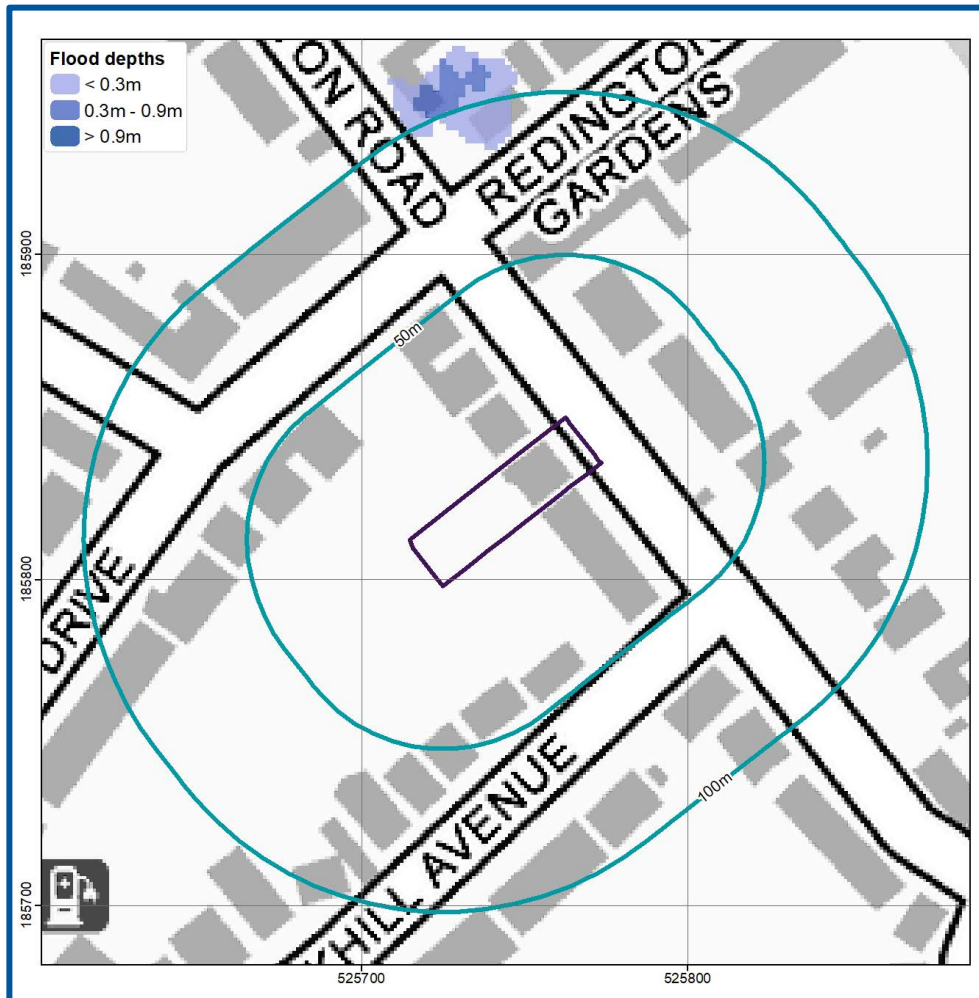

Contains Ordnance Survey data © Crown copyright and database right 2021
Environment Agency copyright and database rights 2021

Analysis of OS mapping, ground elevation data and the EA's pluvial flow route mapping in the 1 in 1000 year event confirms the Site is not located on a potential overland flow route during a Low risk scenario.

According to Figure 3 IV of the SFRA (URS, 2014) indicates no incidences of surface water flooding within 150 m of the Site, the Site is located within the Group3_010 Critical Drainage Area (CDA)¹.

¹ A Critical Drainage Area (CDA) is an area that has critical drainage problems and which has been notified to the local planning authority as such by the Environment Agency in line with the National Planning Policy Framework (NPPF, 2019). CDA's are specific to Flood Zone 1, defined as areas where runoff can and may have historically contributed to flooding downstream, although they are not necessarily areas where flooding problems may occur. Where a Site

Climate change may lead to an increase in rainfall intensity which affects river levels, land and urban drainage systems. Rainfall intensity for small and urban catchments may increase from 5 to 20% (central estimate) or 10% to 40% (Upper estimate) over the period to 2115 (EA, 2021). The increase in surface water flood risk is best represented by the 1 in 1000 year pluvial flood extent but according to the mapping this is unlikely to impact the Site.

On-Site surface water drainage systems should be designed appropriately to manage the run-off.

is located in Flood Zone 1 and within a CDA, a Flood Risk Assessment (FRA) is required and the Council may also request Sustainable Drainage Scheme (SuDS) features to be included within the proposed development.

Groundwater flooding

Groundwater flooding occurs when sub-surface water emerges from the ground at the surface or into Made Ground and structures. This may be as a result of persistent rainfall that recharges aquifers until they are full; or may be as a result of high river levels, or tides, driving water through near-surface deposits. Flooding may last a long time compared to surface water flooding, from weeks to months. Hence the amount of damage that is caused to property may be substantially higher.

Groundwater Flood Risk screening data (Figure 9) indicates there is a Negligible risk of groundwater flooding at surface in the vicinity during a 1 in 100 year event.

Figure 9. GeoSmart GW5 Groundwater Flood Risk Map (GeoSmart, 2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Contains British Geological Survey materials © NERC 2021

Mapped classes combine likelihood, possible severity and the uncertainty associated with predicting the subsurface system. The map is a national scale screening tool to prompt site-specific assessment where the impact of groundwater flooding would have significant adverse consequences. Mapping limitations and a number of local factors may reduce groundwater flood risk to land and property even where it lies within mapped groundwater

flood risk zones, which do not mean that groundwater floods will occur across the whole of the risk area.

The SFRA does not reference incidences of historic groundwater flooding and therefore the risk within the surrounding area could not be ascertained.

Based on a review of (limited) site specific data there is unlikely to be a mechanism for groundwater flooding at the site and the risk is negligible. Although the following mitigation measures could be considered:

- Waterproof tanking of the basement and consideration of a sump and pump to extract any flood water.

The risks are higher for basements, buried infrastructure and soak-away systems which may be affected by high groundwater levels

Guidance

Negligible Risk - There will be a remote possibility that incidence of groundwater flooding could lead to damage to property or harm to other sensitive receptors at, or near, this location.

Flooding from artificial sources

Artificial sources of flood risk include waterbodies or watercourses that have been amended by means of human intervention rather than natural processes. Examples include reservoirs (and associated water supply infrastructure), docks, sewers and canals. The flooding mechanism associated with flood risk from artificial sources is primarily related to breach or failure of structures (reservoir, lake, sewer, canal, flood storage areas, etc.)

Sewer flooding

Figures 5a and 5b of the SFRA (URS, 2014) indicate no incidences of external or internal sewer flooding within the vicinity of the Site.

Records held by Thames Water indicate that there have been no incidences of flooding related to the surcharging of public sewers at the Site (Thames Water, 2021; Appendix B).

Guidance

Properties classified as "at risk" are those that have suffered, or are likely to suffer, internal flooding from public foul, combined or surface water sewers due to overloading of the sewerage system either once or twice in the ten year reference period. Records held by the sewage utility company provide information relating to reported incidents, the absence of any records does not mean that the Site is not at risk of flooding.

Canal failure

According to Ordnance Survey (OS) mapping, there are no canals within 500 m of the Site.

Water supply infrastructure

Water supply infrastructure is comprised of a piped network to distribute water to private houses or industrial, commercial or institution establishments and other usage points. In urban areas, this represents a particular risk of flooding due to the large amount of water supply infrastructure, its condition and the density of buildings. The risks of flooding to properties from burst water mains cannot be readily assessed.

If more information regarding the condition and history of the water supply infrastructure within the vicinity of the Site is required, then it is advisable to contact the local water supplier (Thames Water).

Culverts and bridges

The blockage of watercourses or structures by debris (that is, any material moved by a flowing stream including vegetation, sediment and man-made materials or refuse) reduces flow capacity and raises water levels, potentially increasing the risk of flooding. High water levels can cause saturation, seepage and percolation leading to failure of earth embankments or other structures. Debris accumulations can change flow patterns, leading to scour, sedimentation or structural failure.

Culverts and bridges have not been identified within 500 m of the Site.

Reservoir flooding

According to the EA's Risk of Flooding from Reservoir mapping the Site is not at risk of flooding from reservoirs (Figure 10) (EA, 2021).

Figure 10. EA Risk of Reservoir Flooding (EA, 2021)



Contains Ordnance Survey data © Crown copyright and database right 2021
Environment Agency copyright and database rights 2021

Guidance

The risk of reservoir flooding is related to the failure of a large reservoir (holding over 25,000 m³ of water) and is based on the worst-case scenario. Reservoir flooding is extremely unlikely to occur (EA, 2021).

5. Flood risk from the development



Floodplain storage

As the development is located within Flood Zone 1, there would be no losses in floodplain storage as a result of the development.

Drainage and run-off

The proposed development involves an increase in the coverage of impermeable surfaces at the Site. As a result, the rate and volume of runoff from the development is likely to increase over its lifetime. Therefore, an estimation of run-off is required to permit effective Site water management and prevent any increase in flood risk to off-Site receptors from the Site, over the lifetime of the proposed development.

The potential surface water run-off generated from the Site during a 1 in 100 year return period should be calculated, using FEH 2013 rainfall data from the online Flood Estimation Handbook (FEH), developed by NERC (2009) and CEH (2016).

The NPPF (2019) recommends the effects of climate change are incorporated into FRA's and the recently updated climate change guidance (published in 2016 and updated in 2019) confirms the requirements for inclusion within FRA's.

As the proposed development is residential, the lifespan of the development and requirements for climate change should allow up to the 2115 scenario.

Table 2. Climate change rainfall allowances

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Sustainable Drainage System (SuDS)

It is recommended attenuation of run-off is undertaken on-Site to compensate for proposed increases in impermeable surface areas. Attenuation may comprise the provision of storage within a Sustainable Drainage System (SuDS). SuDS can deliver benefits from improving the management of water quantity, water quality, biodiversity and amenity. GeoSmart have prepared a separate Sustainable Drainage Scheme (SuDS) strategy for the Site (ref: 75105.01) to ensure surface water runoff will be managed effectively over the lifespan of the proposed development. It is assumed that any changes to the existing drainage system will be undertaken in accordance with best practice and that care will be taken to ensure the new development does not overload/block any existing drainage or flow pathways to/from the Site.

6. Suitability of the proposed development



The information below outlines the suitability of proposed development in relation to national and local planning policy.

National policy and guidance

The aims of the national planning policies are achieved through application of the Sequential Test and in some cases the Exception Test.

Guidance

Sequential test: The aim of this test is to steer new development towards areas with the lowest risk of flooding (NPPF, 2019). Reasonably available sites located in Flood Zone 1 should be considered before those in Flood Zone 2 and only when there are no reasonably available sites in Flood Zones 1 and 2 should development in Flood Zone 3 be considered.

Exception test: In some cases, this may need to be applied once the Sequential Test has been considered. For the exception test to be passed it must be demonstrated that the development would provide wider sustainability benefits to the community that outweigh flood risk and a site-specific FRA must demonstrate that the development will be safe for its lifetime taking account of the vulnerability of its users, without increasing flood risk elsewhere, and, where possible, will reduce flood risk overall.

Suitability of the proposed development, and whether the Sequential and Exception Tests are required, is based on the Flood Zone the Site is located within and the flood risk vulnerability classification of the existing and proposed development. Some developments may contain different elements of vulnerability and the highest vulnerability category should be used, unless the development is considered in its component parts.

This report has been produced to assess all development types, prior to any development. The vulnerability classification and Flood Zones are compared within Table 3 overleaf (Table 3 of the NPPG (2014)).

As the Site is located within Flood Zone 1, all types of development listed within the Table overleaf are acceptable according to National Policy.

Table 3. Flood risk vulnerability and flood zone 'compatibility (taken from NPPG, 2014)

Flood risk vulnerability classification		Essential infrastructure	Water compatible	Highly vulnerable	More vulnerable	Less vulnerable
Flood Zone	Zone 1 – low probability	✓	✓	✓	✓	✓
	Zone 2 – medium probability	✓	✓	Exception test required	✓	✓
	Zone 3a - high probability	Exception test required	✓	X	Exception test required	✓
	Zone 3b – functional flood plain	Exception test required	✓	X	X	X

Local policy and guidance

For this report, several documents have been consulted for local policy and guidance and relevant information is outlined below:

London Borough of Camden Strategic Flood Risk Assessment (URS, 2014):

DP23 Water

2.4.5- The Council will require developments to reduce their water consumption, the pressure on the combined sewer network and the risk of flooding by:

- Incorporating water efficient features and equipment and capturing, retaining and re-using surface water and grey water on-site;*
- Limiting the amount and rate of run-off and waste water entering the combined storm water and sewer network through the methods outlined in part a) and other sustainable urban drainage methods to reduce the risk of flooding;*
- Reducing the pressure placed on the combined storm water and sewer network from foul water and surface water run-off and ensuring developments in the areas identified by the*

North London Strategic Flood Risk Assessment and shown on Map 2 as being at risk of surface water flooding are designed to cope with the potential flooding;

- *Ensuring that developments are assessed for upstream and downstream groundwater flood risks in areas where historic underground streams are known to have been present; and*
- *Encouraging the provision of attractive and efficient water features.*

DP27 Basements and lightwells

2.4.6- In determining proposals for basement and other underground development, the Council will require an assessment of the scheme's impact on drainage, flooding, groundwater conditions and structural stability, where appropriate. The Council will only permit basement and other underground development that does not result in flooding or ground instability. We will require developers to demonstrate by methodologies appropriate to the site that schemes:

- *Maintain the structural stability of the building and neighbouring properties;*
- *Avoid adversely affecting drainage and run-off or causing other damage to the water environment;*
- *Avoid cumulative impacts upon structural stability or the water environment in the local area.*

Basement Dwellings

LBC should consider restricting the placement of sleeping accommodation below the external street level in areas of 'High' surface water flood risk in order to reduce the risk of water ingress into bedrooms during extreme rainfall events. For dwelling and non-dwelling basements, single storey accommodation and multi-storey buildings with ground floor sleeping accommodation in areas of flood risk from sources other than fluvial external, access should be located above the predicted flood level. For example, should the uFMfSW indicate that a proposed development is in an area of medium or high flood risk, the level of external access should be of primary consideration. It should be noted that the uFMfSW should not be used on a site-specific basis due to the limitations of the modelling, but instead should be used as a guide for potential risk.

Guidance

Strategic Flood Risk Assessments are carried out by local authorities, in consultation with the Environment Agency, to assess the flood risk to the area from all sources both now and in the future due to climate change. They are used to inform planning decisions to ensure inappropriate development is avoided (NPPF, 2019).

7. Resilience and mitigation



Based on the flood risk identified at the Site, the national and local policies and guidance and proposed development, the mitigation measures outlined within this section of the report are likely to help protect the development from flooding.

Sea (coastal/tidal) flood mitigation measures

As the Site is not identified as being at risk of flooding from the sea, mitigation measures are not required.

Rivers (fluvial) flood mitigation measures

As the Site is not identified as being at risk of flooding from fluvial sources, mitigation measures are not required.

Surface water (pluvial) flood mitigation measures

As the Site is not identified as being at risk of pluvial flooding, mitigation measures are not required.

In addition, the regular maintenance of any drains surrounding/on the Site should be undertaken to reduce the flood risk.

A surface water drainage strategy has been prepared separately (ref: 75105.01) to ensure surface water runoff can be managed effectively over the lifetime of the proposed development.

Groundwater flood mitigation measures

As the Site is not identified as being at risk of groundwater flooding, mitigation measures are not required. The risk may be higher for below ground infrastructure and the basement, although the geological setting at the site suggests that groundwater is unlikely to be an issue at the Site. Mitigation measures that could be considered are:

- Waterproof tanking of the basement; and/or
- A sump and pump to extract any flood water.

Reservoir flood mitigation measures

The Site is not a risk of flooding from reservoirs; therefore, mitigation measures are not required.

Other flood risk mitigation measures

As the Site is not identified as at risk from other sources, mitigation measures are not required.

Residual flood risk mitigation measures

The risk to the Site has been assessed from all sources of flooding and appropriate mitigation and management measures proposed to keep the users of the development safe over its lifetime. There is however a residual risk of flooding associated with the potential for failure of mitigation measures if regular maintenance and upkeep isn't undertaken. If mitigation measures are not implemented or maintained, the risk to the development will remain as the baseline risk.

Further flood mitigation information

More information on flood resistance, resilience and water entry can be found here:
http://www.planningportal.gov.uk/uploads/br/flood_performance.pdf
www.knowyourfloodrisk.co.uk

8. Conclusions and recommendations



Table 4. Risk ratings following implementation and subsequent maintenance of mitigation measures

Source of Flood Risk	Baseline	After Mitigation
River (fluvial) and Sea (coastal/tidal)	Very Low	N/A
Surface water (pluvial) flooding	Very Low	N/A
Groundwater flooding	Negligible	N/A
Other flood risk factors present	No	No

N/A = mitigation not required

The table below provides a summary of where the responses to key questions are discussed in this report. Providing the recommended mitigation measures are put in place it is likely that flood risk to this Site will be reduced to an acceptable level.




Table 5. Summary of responses to key questions in the report

Key sources of flood risks identified	None (see Section 4).
Are standard mitigation measures likely to provide protection from flooding to/from the Site?	N/A (see Section 7).
Is any further work recommended?	Yes
<p>As the Site is not identified as being at risk of groundwater flooding, mitigation measures are not required. The risk may be higher for below ground infrastructure and the basement, although the geological setting at the site suggests that groundwater is unlikely to be an issue at the Site. Mitigation measures that could be considered are</p> <ul style="list-style-type: none"> • Waterproof tanking of the basement; and/or, • A sump and pump to extract any flood water. 	

9. Further information



The following table includes a list of additional products by GeoSmart:

Additional GeoSmart Products			
	Additional assessment: SuDSmart Report		<p>The SuDSmart Report range assesses which drainage options are available for a Site. They build on technical detail starting from simple infiltration screening and work up to more complex SuDS Assessments detailing alternative options and designs.</p> <p>Please contact info@geosmartinfo.co.uk for further information.</p>
	Additional assessment: EnviroSmart Report		<p>Provides a robust desk-based assessment of potential contaminated land issues, taking into account the regulatory perspective.</p> <p>Our EnviroSmart reports are designed to be the most cost effective solution for planning conditions. Each report is individually prepared by a highly experienced consultant conversant with Local Authority requirements.</p> <p>Ideal for pre-planning or for addressing planning conditions for small developments. Can also be used for land transactions.</p> <p>Please contact info@geosmartinfo.co.uk for further information.</p>

10. References and glossary



References

British Geological Survey (BGS) (2021). Geology of Britain Viewer. Accessed from: <http://mapapps.bgs.ac.uk/geologyofbritain/home.html> on 27/07/2021.

Department for Communities and Local Government (2019). National Planning Policy Framework (NPPF). Accessed from: https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/810197/NPPF_Feb_2019_revised.pdf on 27/07/2021.

Defra/Environment Agency (2005). Flood Risk Assessment Guidance for New Development. *Phase 2 Framework and Guidance for Assessing and Managing Flood Risk for New Development – Fill Documentation and Tools*. R & D Technical Report FD232-/TR2.

Environment Agency [EA] (2021). Flood risk assessments: climate change allowances. Accessed from: <https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances> on 27/07/2021.

Environment Agency [EA] (2021). MagicMap. Accessed from: <http://magic.defra.gov.uk/MagicMap.aspx> on 27/07/2021.

Environment Agency [EA] (2021). Flood map for planning. Accessed from <https://flood-map-for-planning.service.gov.uk/> on 27/07/2021.

Environment Agency [EA] (2021). Long term flood risk assessment for locations in England. Accessed from <https://flood-warning-information.service.gov.uk/long-term-flood-risk> on 27/07/2021.

GeoSmart (2021). GeoSmart groundwater flood risk (GW5) map (version 2.4).

Ministry of Housing, Communities & Local Government (2014). Planning Practice Guidance (NPPG). Flood Risk and Coastal Change. Accessed from <http://planningguidance.planningportal.gov.uk/blog/guidance/flood-risk-and-coastal-change/> on 27/07/2021.

Ordnance Survey Mapping (2021). © Crown copyright. All rights reserved. Licence number AL 100054687. For full terms and conditions visit: www.ordnancesurvey.co.uk

URS (2014). London Borough of Camden Strategic Flood Risk Assessment. Accessed from: <https://www.camden.gov.uk/documents/20142/0/download+%2815%29.pdf/37025249-3da8-4fe1-3075-aa025d3b66de> on 27/07/2021.

Survey Open Data (2021). Accessed from: <http://www.geostore.com/environment-agency/survey.html#/survey/tandc> on 27/07/2021.

Thames Water (2021). Thames Water Property Searches – Sewer Flooding History Enquiry. SFH/SFH Standard/2021_4475911

Glossary

General terms

BGS	British Geological Survey
EA	Environment Agency
GeoSmart groundwater flood risk model	GeoSmart's national groundwater flood risk model takes advantage of all the available data and provides a preliminary indication of groundwater flood risk on a 50m grid covering England and Wales. The model indicates the risk of the water table coming within 1 m of the ground surface for an indicative 1 in 200 year return period scenario.
Dry-Island	An area considered at low risk of flooding (e.g. In a Flood Zone 1) that is entirely surrounded by areas at higher risk of flooding (e.g. Flood Zone 2 and 3)
Flood resilience	Flood resilience or wet-proofing accepts that water will enter the building, but through careful design will minimise damage and allow the re-occupancy of the building quickly. Mitigation measures that reduce the damage to a property caused by flooding can include water entry strategies, raising electrical sockets off the floor, hard flooring.
Flood resistance	Flood resistance, or dry-proofing, stops water entering a building. Mitigation measures that prevent or reduce the likelihood of water entering a property can include raising flood levels or installation of sandbags.
Flood Zone 1	This zone has less than a 0.1% annual probability of river flooding
Flood Zone 2	This zone has between 0.1 and 1% annual probability of river flooding and between 0.1% and 0.5 % annual probability sea flooding
Flood Zone 3	This zone has more than a 1% annual probability of river flooding and 0.5% annual probability of sea flooding
Functional Flood Plain	An area of land where water has to flow or be stored in times of flood.
Hydrologic model	A computer model that simulates surface run-off or fluvial flow. The typical accuracy of hydrologic models such as this is $\pm 0.25\text{m}$ for estimating flood levels at particular locations.
OS	Ordnance Survey
Residual Flood Risk	The flood risk remaining after taking mitigating actions.
SFRA	Strategic Flood Risk Assessment. This is a brief flood risk assessment provided by the local council

SuDS	A Sustainable drainage system (SuDS) is designed to replicate, as closely as possible, the natural drainage from the Site (before development) to ensure that the flood risk downstream of the Site does not increase as a result of the land being developed. SuDS also significantly improve the quality of water leaving the Site and can also improve the amenity and biodiversity that a Site has to offer. There are a range of SuDS options available to provide effective surface water management that intercept and store excess run-off. Sites over 1 Ha will usually require a sustainable drainage assessment if planning permission is required. The current proposal is that from April 2014 for more than a single dwelling the drainage system will require approval from the SuDS Approval Board (SABs).
------	--

Aquifer Types

Principal aquifer	These are layers of rock or drift deposits that have high intergranular and/or fracture permeability - meaning they usually provide a high level of water storage. They may support water supply and/or river base flow on a strategic scale.
Secondary A aquifer	Permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers.
Secondary B aquifer	Predominantly lower permeability layers which may store and yield limited amounts of groundwater due to localised features such as fissures, thin permeable horizons and weathering.
Secondary undifferentiated	Has been assigned in cases where it has not been possible to attribute either category A or B to a rock type due to the variable characteristics of the rock type.
Unproductive Strata	These are rock layers or drift deposits with low permeability that has negligible significance for water supply or river base flow.

NPPF (2019) terms

Exception test	Applied once the sequential test has been passed. For the exception test to be passed it must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risk and a site-specific FRA must demonstrate that the development will be safe for its lifetime taking account of the vulnerability of its users, without increasing flood risk elsewhere, and, where possible, will reduce flood risk overall.
Sequential test	Aims to steer new development to areas with the lowest probability of flooding.
Essential infrastructure	Essential infrastructure includes essential transport infrastructure, essential utility infrastructure and wind turbines.

Water compatible	Water compatible land uses include flood control infrastructure, water-based recreation and lifeguard/coastal stations.
Less vulnerable	Less vulnerable land uses include police/ambulance/fire stations which are not required to be operational during flooding and buildings used for shops/financial/professional/other services.
More vulnerable	More vulnerable land uses include hospitals, residential institutions, buildings used for dwelling houses/student halls/drinking establishments/hotels and sites used for holiday or short-let caravans and camping.
Highly vulnerable	Highly vulnerable land uses include police/ambulance/fire stations which are required to be operational during flooding, basement dwellings and caravans/mobile homes/park homes intended for permanent residential use.

Data Sources

Aerial Photography	Contains Ordnance Survey data © Crown copyright and database right 2021 BlueSky copyright and database rights 2021
Bedrock & Superficial Geology	Contains British Geological Survey materials © NERC 2021 Ordnance Survey data © Crown copyright and database right 2021
Flood Risk (Flood Zone/RoFRS/Historic Flooding/Pluvial/Surface Water Features/Reservoir/ Flood Alert & Warning)	Environment Agency copyright and database rights 2021 Ordnance Survey data © Crown copyright and database right 2021
Flood Risk (Groundwater)	GeoSmart, BGS & OS GW5 (v2.4) Map (GeoSmart, 2021) Contains British Geological Survey materials © NERC 2021 Ordnance Survey data © Crown copyright and database right 2021
Location Plan	Contains Ordnance Survey data © Crown copyright and database right 2021
Topographic Data	OS LiDAR/EA Contains Ordnance Survey data © Crown copyright and database right 2021 Environment Agency copyright and database rights 2021


11. Appendices




Appendix A



Site plans

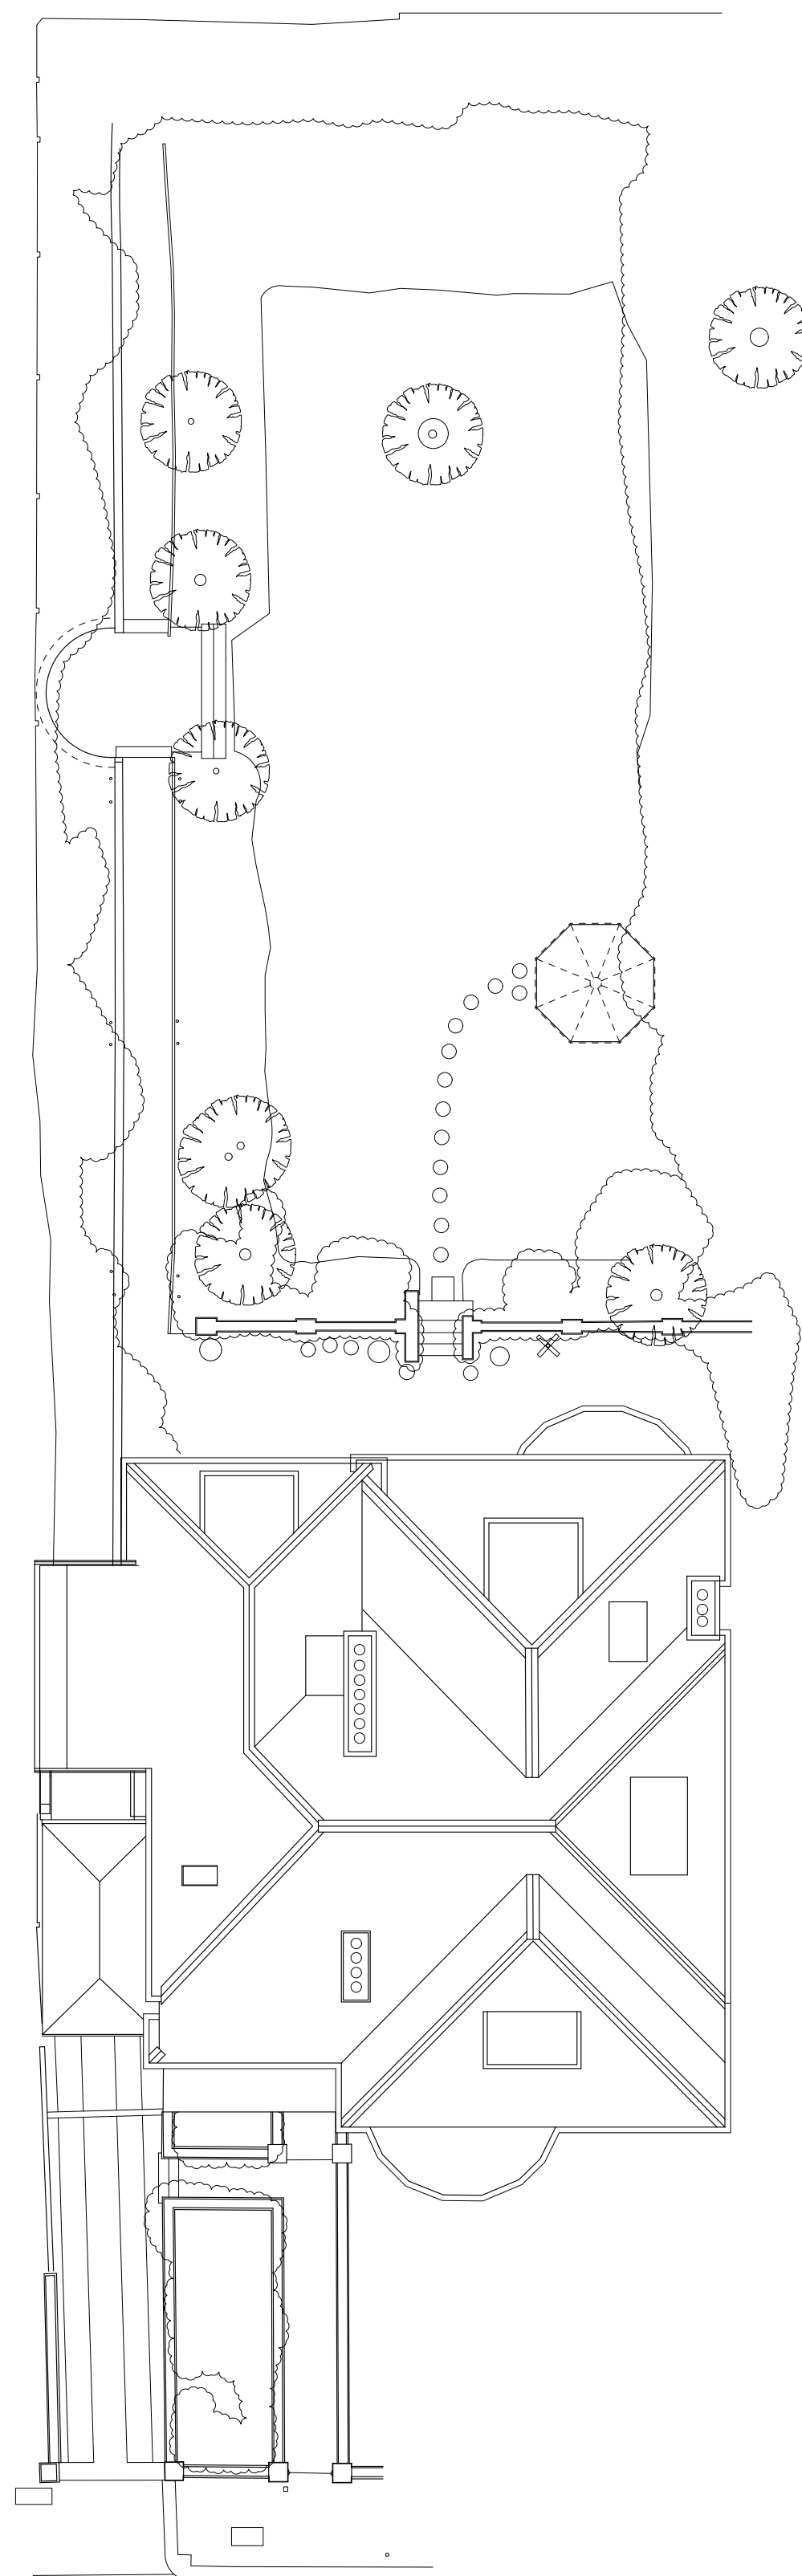

1 Existing Site Plan
Scale: 1:150

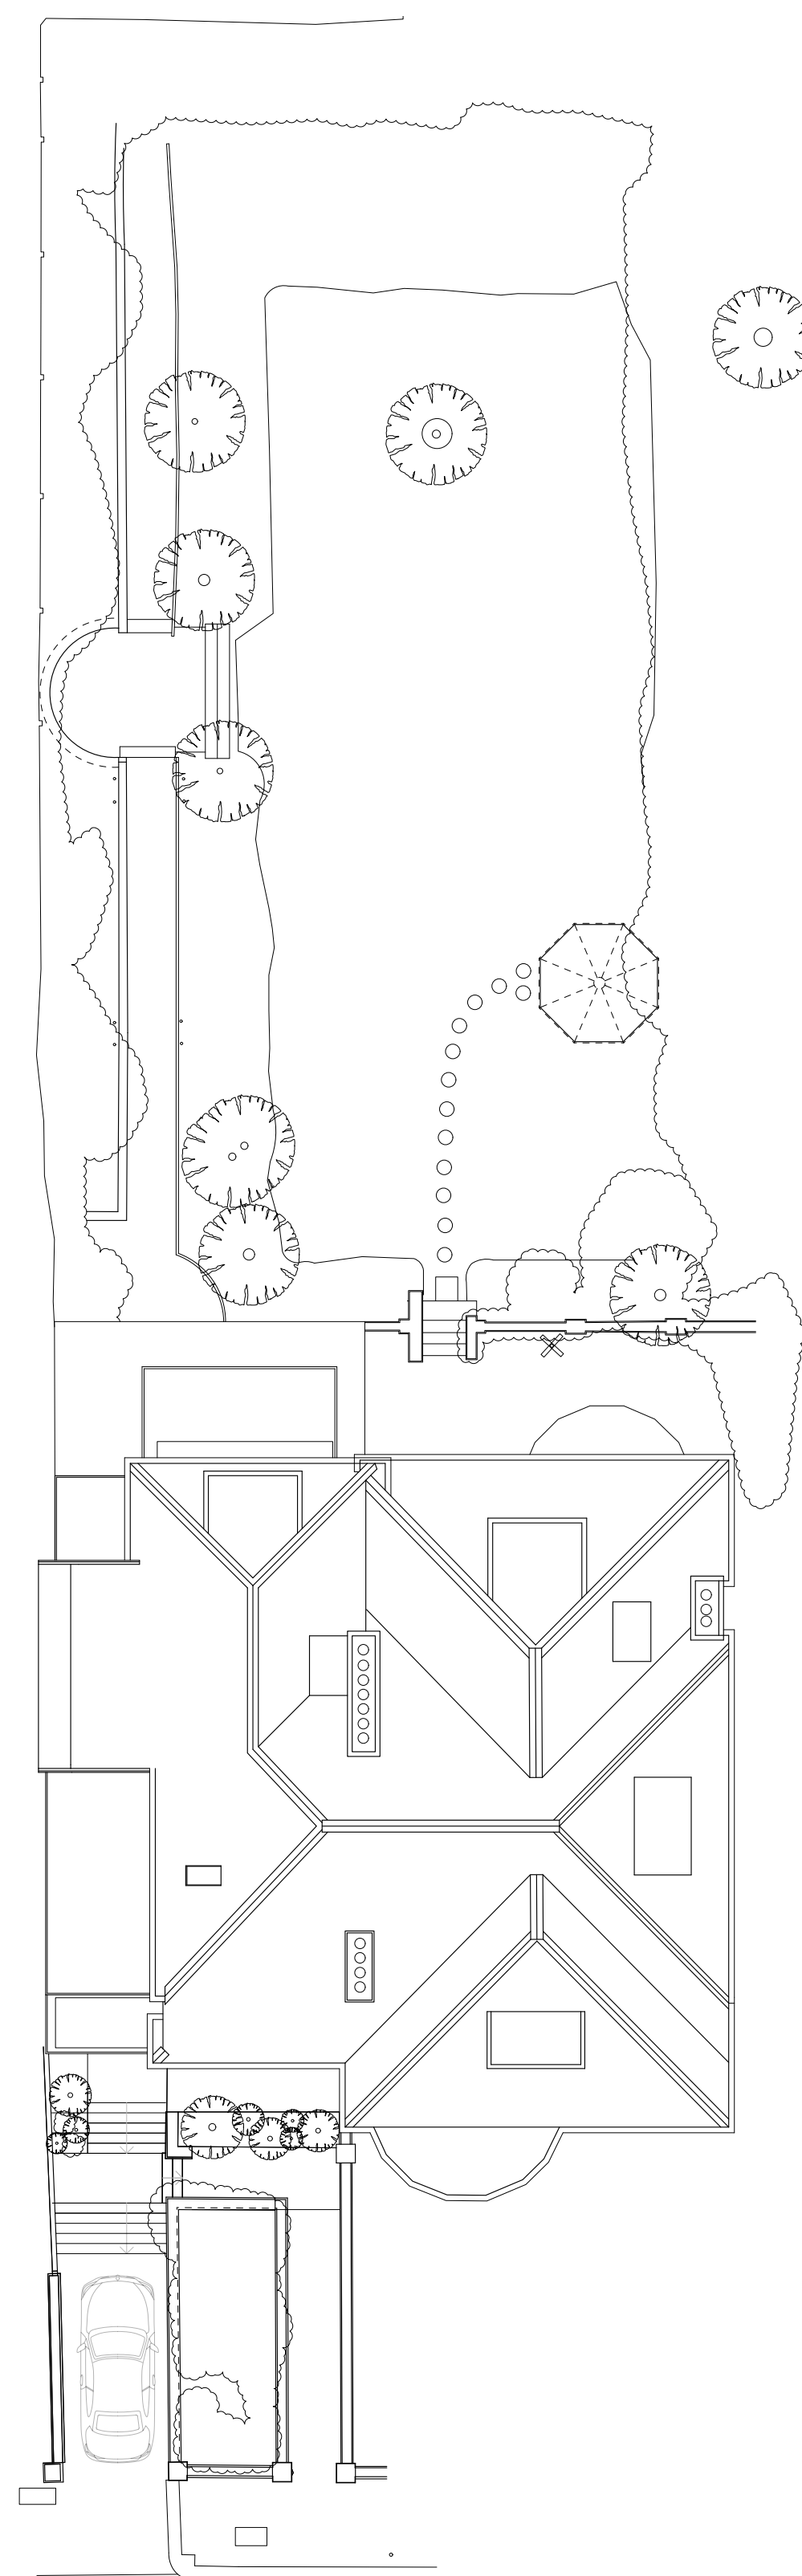

2 Proposed Site Plan
Scale: 1:150

NOTES:

This drawing is issued for information only.

All dimensions to be checked on site and any discrepancies are to be raised with the drawing issuer for clarification.

Dimensions are not to be scaled from this drawing.

The information shown on this drawing is subject to measured surveys and structural engineer's designs.

No building work is to be carried out on the basis of this drawing, without the written consent of Amos Goldreich Architecture.

rev	date	initials	description
-----	------	----------	-------------

location



Amos Goldreich Studio 32 T +44(0)207272 6592
Architecture Bickerton House E info@agarchitecture.net
25 Bickerton Road www.agarchitecture.net
London N19 5JT


project

43A Redington Road


drawing title

Site Plans

drawn AM		
date April 2021	scale @ A1 1:150	status Pre-App
project number 340	drawing number 100	rev. A

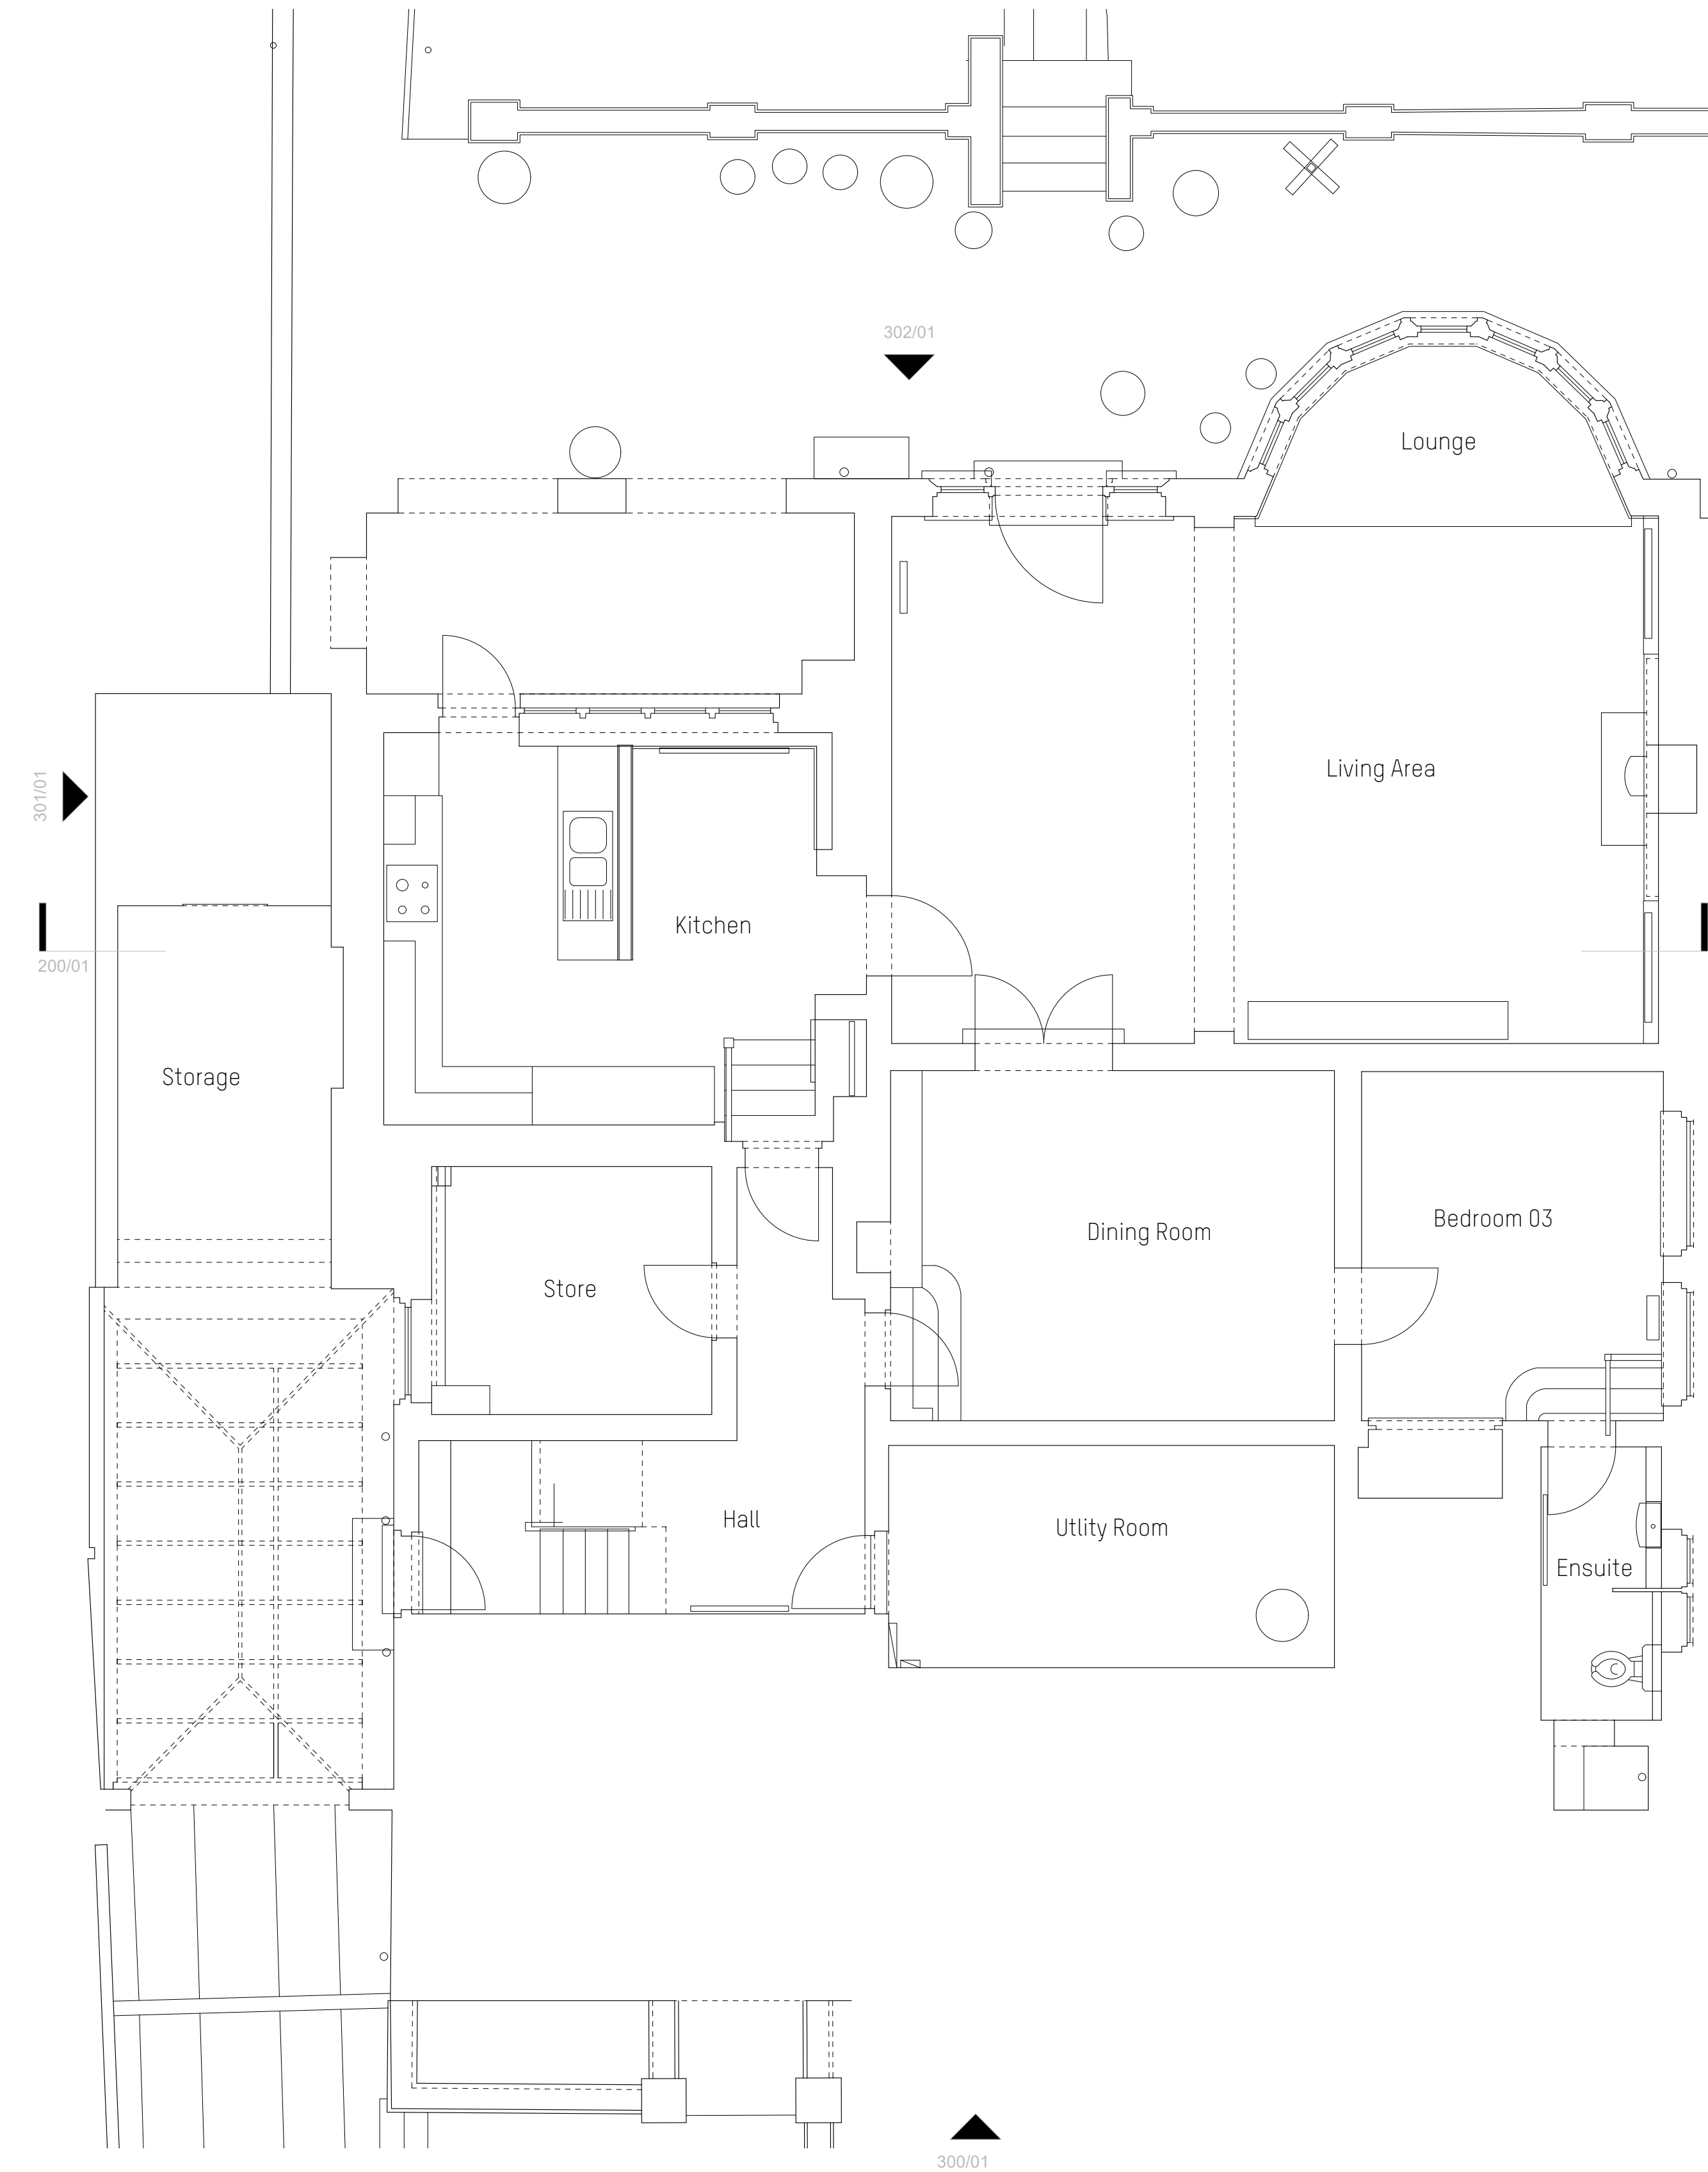

1 Existing Lower Ground Floor Plan
Scale: 1:50

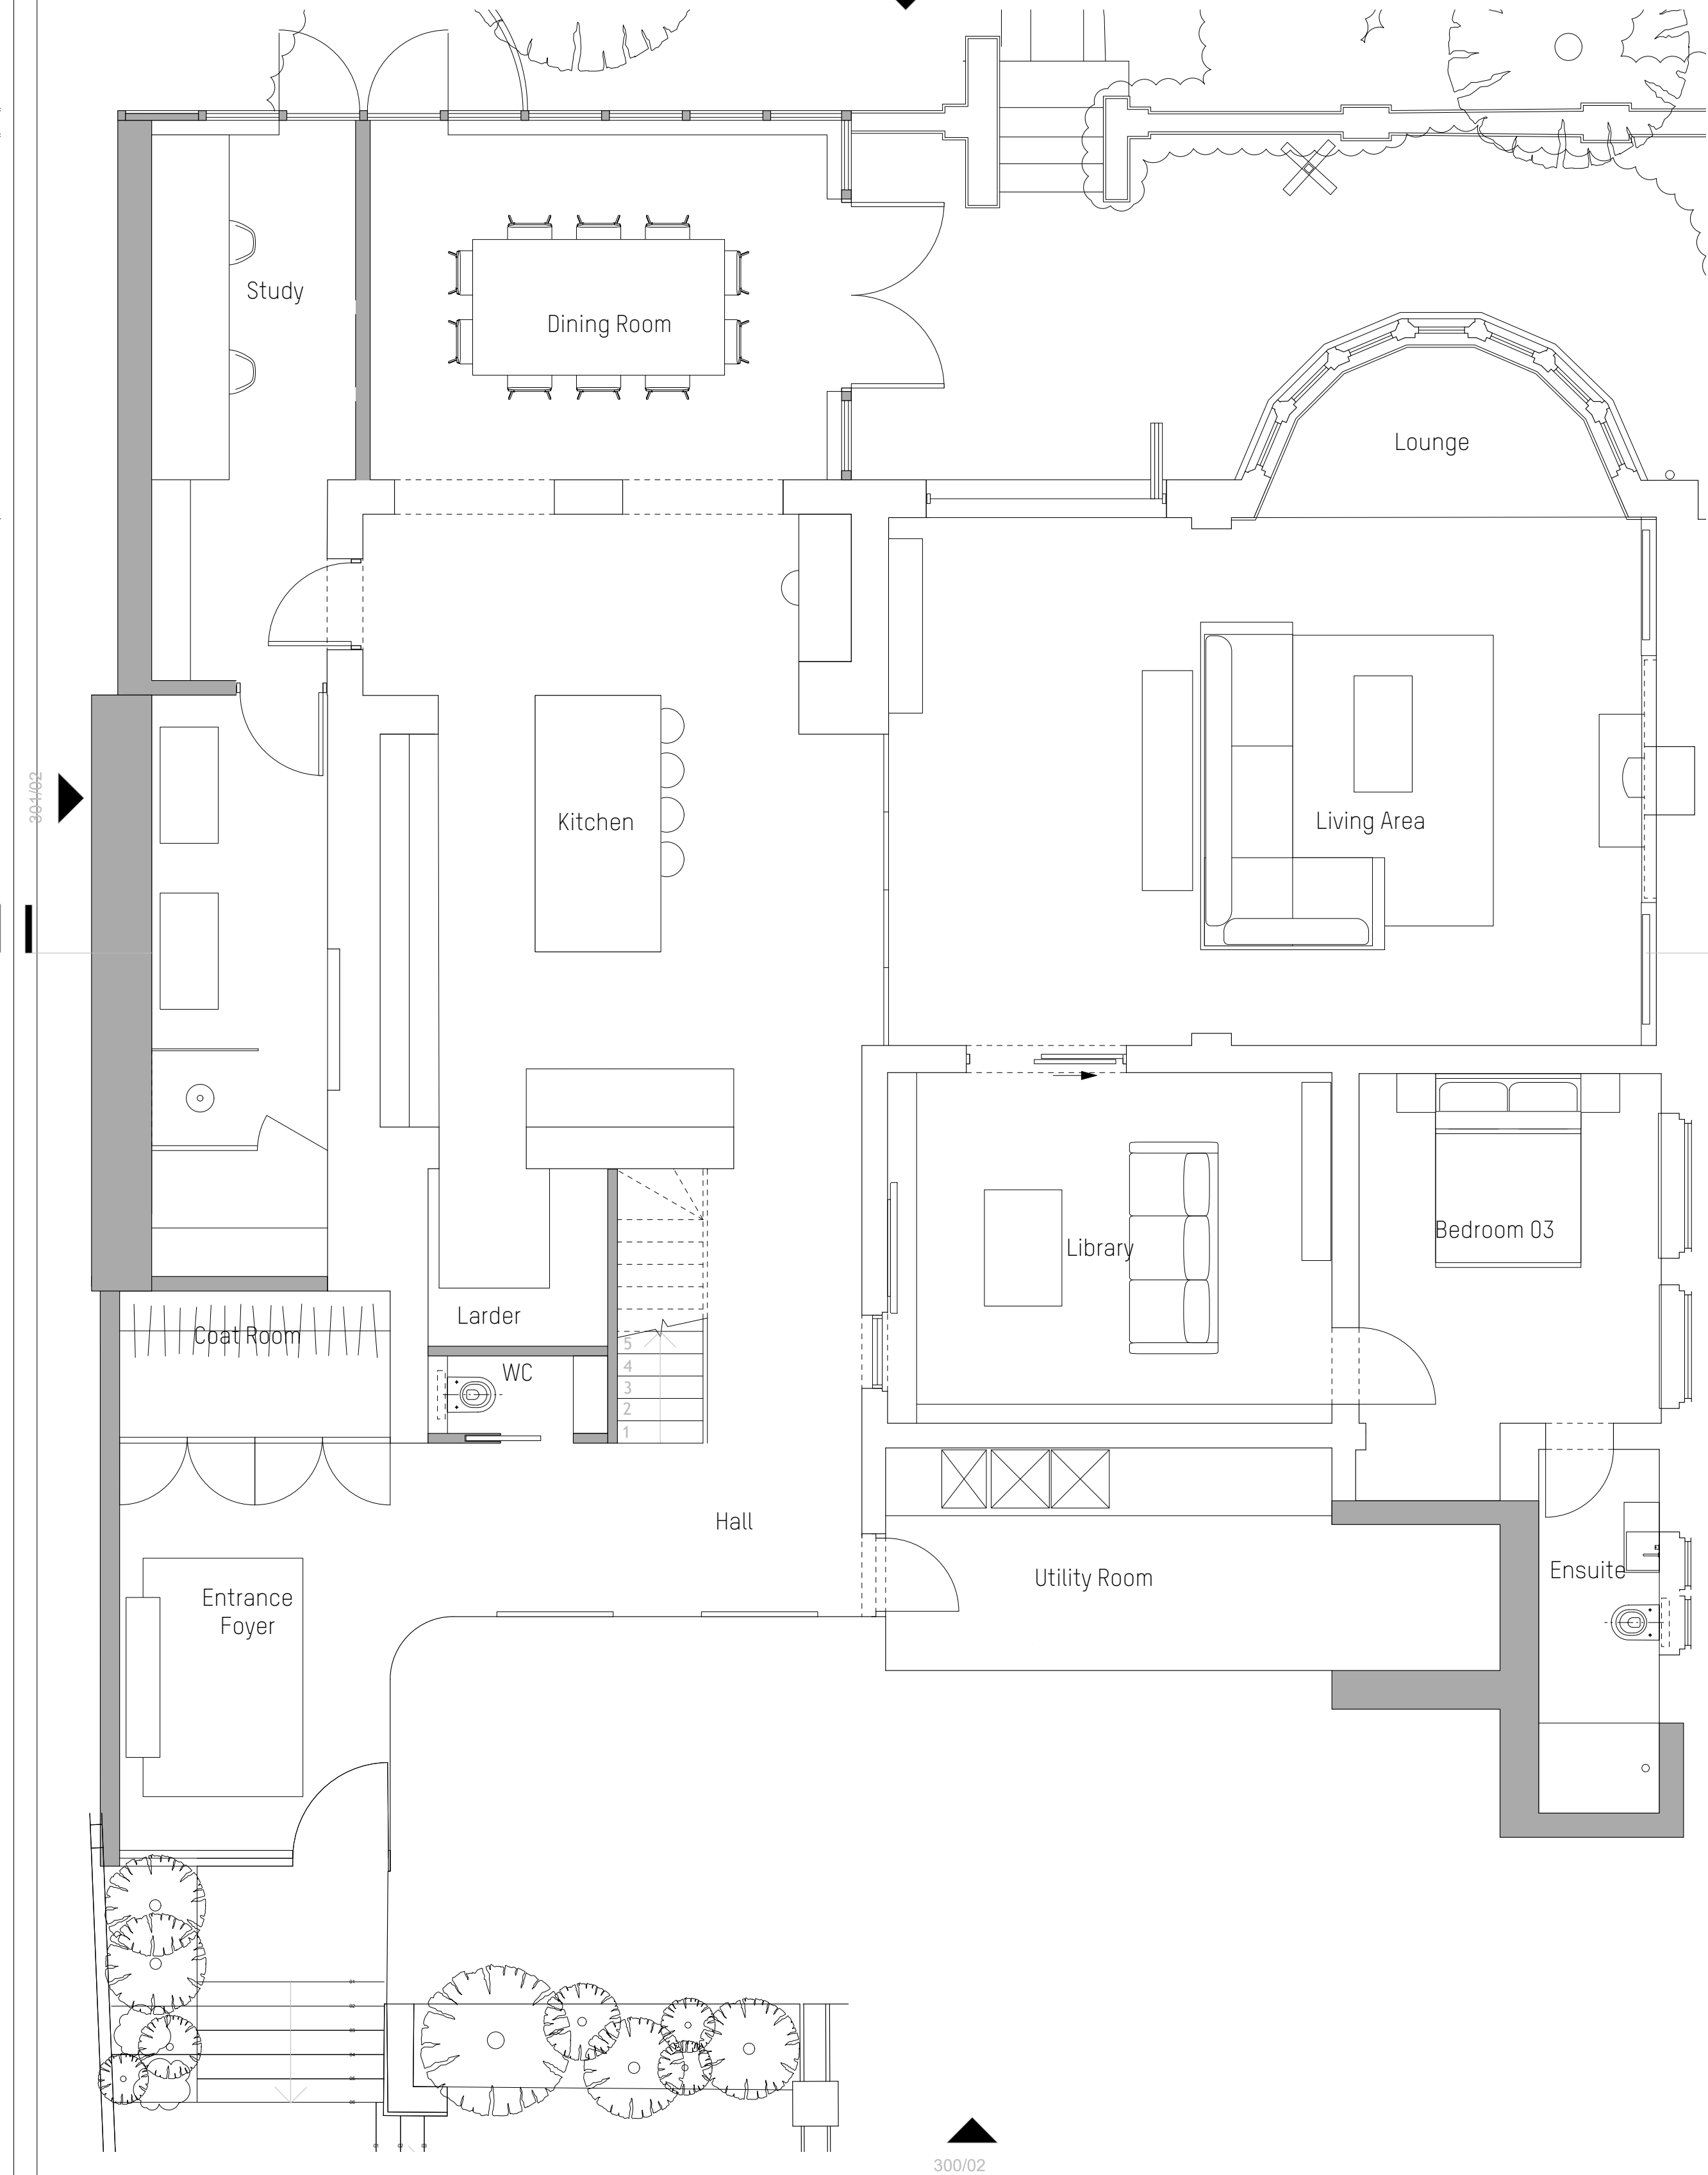

2 Proposed Lower Ground Floor Plan
Scale: 1:50

NOTES:

This drawing is issued for information only.

All dimensions to be checked on site and any discrepancies are to be raised with the drawing issuer for clarification.

Dimensions are not to be scaled from this drawing.

The information shown on this drawing is subject to measured surveys and structural engineer's designs.

No building work is to be carried out on the basis of this drawing, without the written consent of Amos Goldreich Architecture.

rev	date	initials	description
-----	------	----------	-------------

location



Amos Goldreich Studio 32
Architecture Bickerton House
25 Bickerton Road London N19 5JT

T +44(0)207272 6592
E info@agarchitecture.net
www.agarchitecture.net


project

43A Redington Road

drawing title

Lower Ground Floor Plans

drawn AM		
date April 2021	scale @ A1 1:50	status Pre-App
project number 340	drawing number 101	rev. A

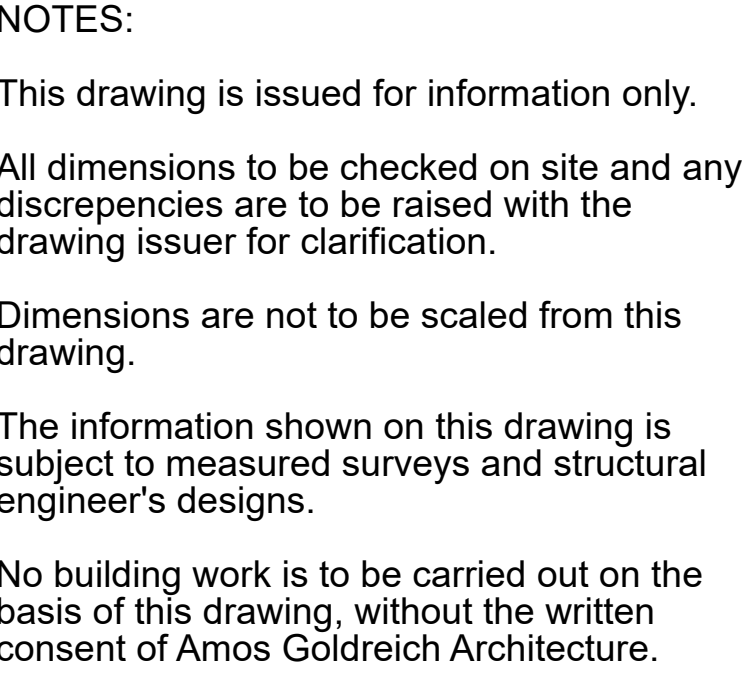

drawn AM		
date April 2021	scale @ A1 1:50	status Pre-App
project number 340	drawing number 102	rev. A



Thames Water sewer flooding report

Sewer Flooding

History Enquiry



Property
Searches

GeoSmart Information Ltd

Search address supplied 43
Redington Road
London
NW3 7RA

Your reference 75105

Our reference SFH/SFH Standard/2021_4475911

Received date 27 July 2021

Search date 27 July 2021



Thames Water Utilities Ltd
Property Searches, PO Box 3189, Slough SL1 4WW
DX 151280 Slough 13



searches@thameswater.co.uk
www.thameswater-propertysearches.co.uk



0800 009 4540

Sewer Flooding

History Enquiry



Property
Searches

Search address supplied: 43, Redington Road, London, NW3 7RA

This search is recommended to check for any sewer flooding in a specific address or area

TWUL, trading as Property Searches, are responsible in respect of the following:-

- (i) any negligent or incorrect entry in the records searched;
- (ii) any negligent or incorrect interpretation of the records searched;
- (iii) and any negligent or incorrect recording of that interpretation in the search report
- (iv) compensation payments



Thames Water Utilities Ltd
Property Searches, PO Box 3189, Slough SL1 4WW
DX 151280 Slough 13



searches@thameswater.co.uk
www.thameswater-propertysearches.co.uk



0800 009 4540

History of Sewer Flooding

Is the requested address or area at risk of flooding due to overloaded public sewers?

The flooding records held by Thames Water indicate that there have been no incidents of flooding in the requested area as a result of surcharging public sewers.

For your guidance:

- A sewer is “overloaded” when the flow from a storm is unable to pass through it due to a permanent problem (e.g. flat gradient, small diameter). Flooding as a result of temporary problems such as blockages, siltation, collapses and equipment or operational failures are excluded.
- “Internal flooding” from public sewers is defined as flooding, which enters a building or passes below a suspended floor. For reporting purposes, buildings are restricted to those normally occupied and used for residential, public, commercial, business or industrial purposes.
- “At Risk” properties are those that the water company is required to include in the Regulatory Register that is presented annually to the Director General of Water Services. These are defined as properties that have suffered, or are likely to suffer, internal flooding from public foul, combined or surface water sewers due to overloading of the sewerage system more frequently than the relevant reference period (either once or twice in ten years) as determined by the Company’s reporting procedure.
- Flooding as a result of storm events proven to be exceptional and beyond the reference period of one in ten years are not included on the At Risk Register.
- Properties may be at risk of flooding but not included on the Register where flooding incidents have not been reported to the Company.
- Public Sewers are defined as those for which the Company holds statutory responsibility under the Water Industry Act 1991.
- It should be noted that flooding can occur from private sewers and drains which are not the responsibility of the Company. This report excludes flooding from private sewers and drains and the Company makes no comment upon this matter.
- For further information please contact Thames Water on Tel: 0800 316 9800 or website www.thameswater.co.uk



Thames Water Utilities Ltd
Property Searches, PO Box 3189, Slough SL1 4WW
DX 151280 Slough 13



searches@thameswater.co.uk
www.thameswater-propertysearches.co.uk



0800 009 4540



Environment Agency LiDAR ground elevation data

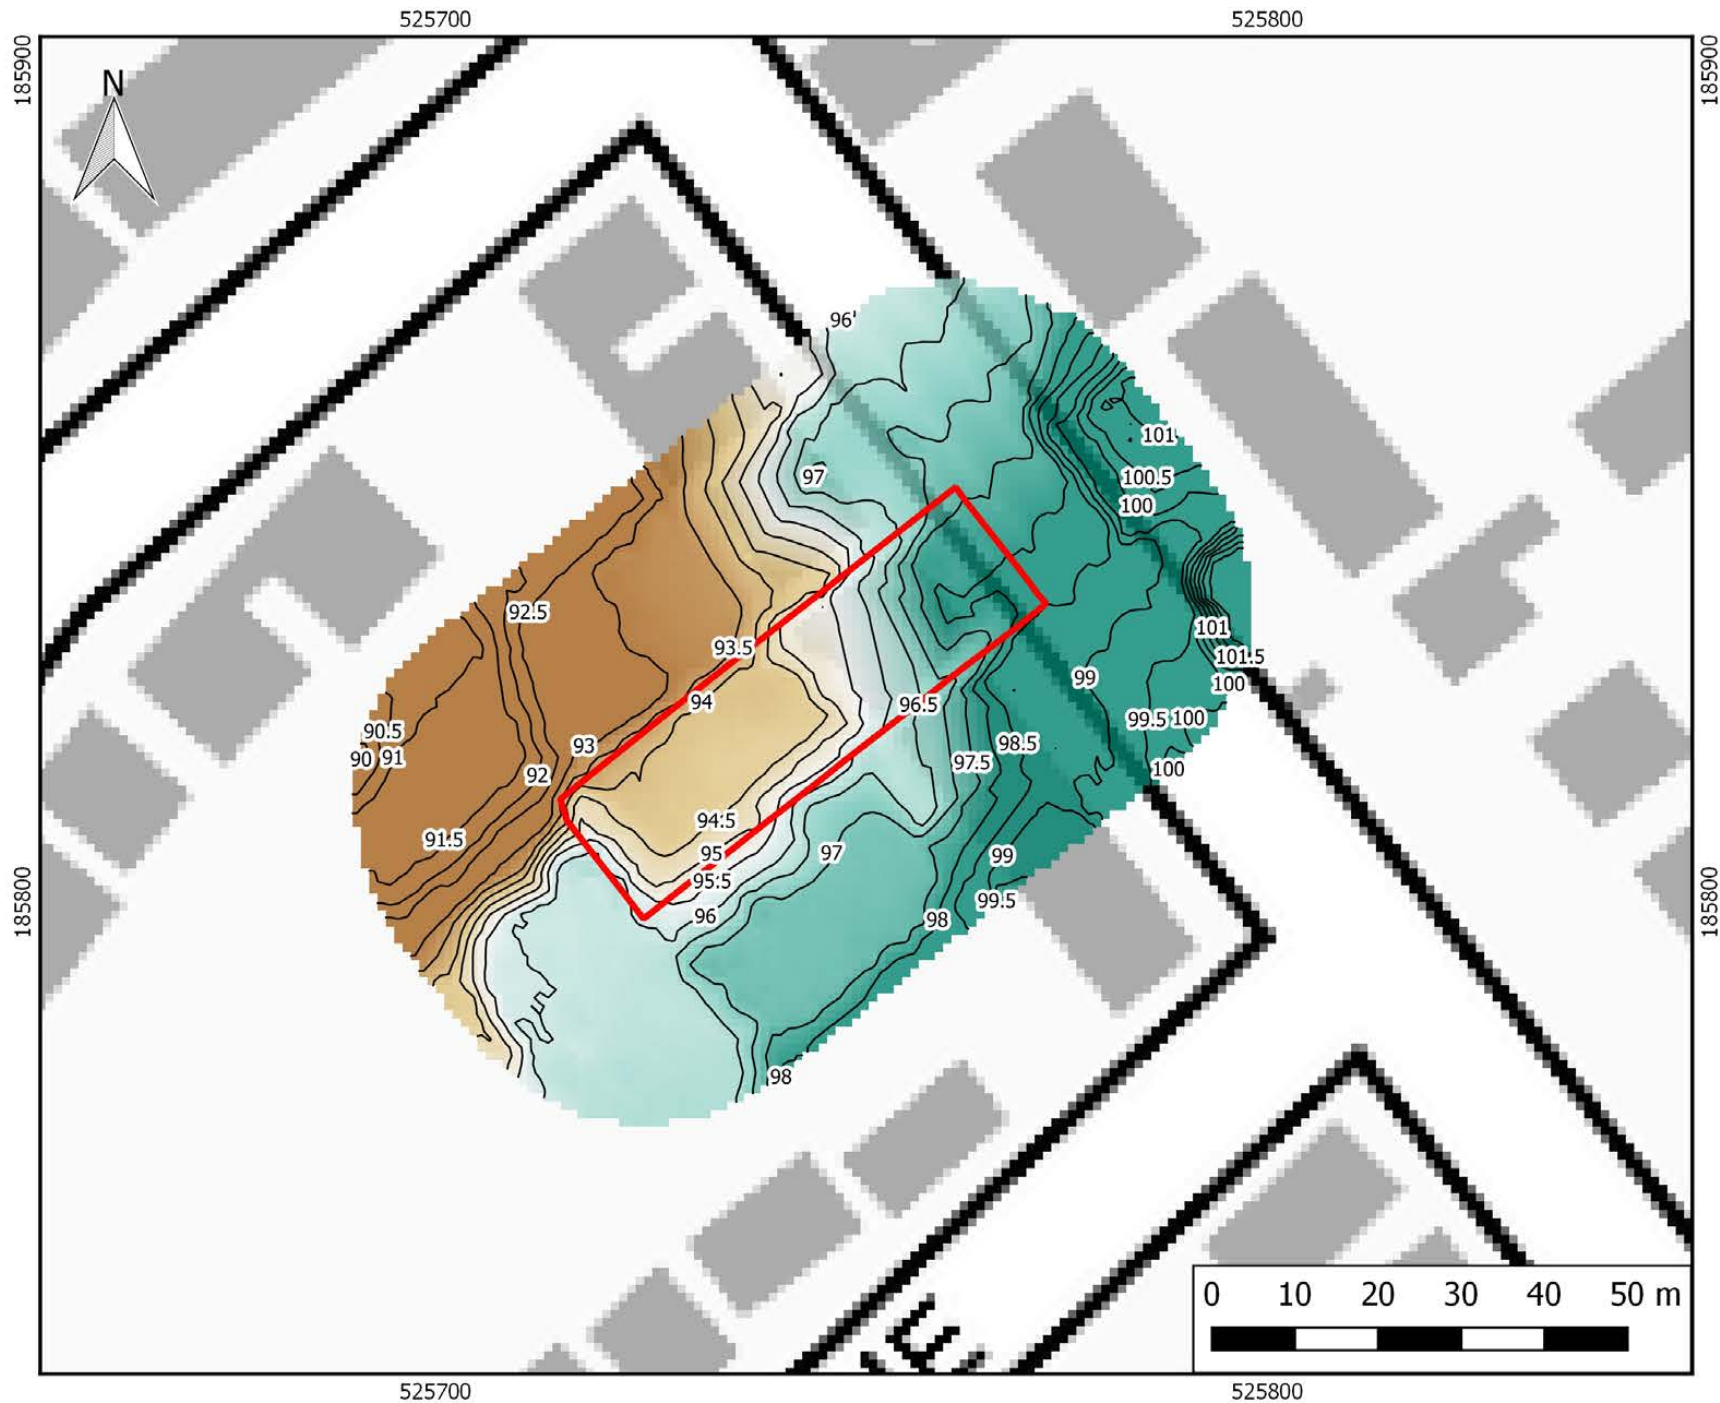


Figure D.1
Elevation on Site
(LIDAR Data)

Legend

- Site boundary
- 0.5m Contours
- Ground levels (mAOD)
- 93
- 94.25
- 95.5
- 96.75

Date 28/07/2021	Drawn
Scale 1:911	Checked
Original	Revision

File Reference

Disclaimer

This report has been prepared by GeoSmart in its professional capacity as soil, groundwater, flood risk and drainage specialists, with reasonable skill, care and diligence within the agreed scope and terms of contract and taking account of the manpower and resources devoted to it by agreement with its client and is provided by GeoSmart solely for the internal use of its client.

The advice and opinions in this report should be read and relied on only in the context of the report as a whole, taking account of the terms of reference agreed with the client. The findings are based on the information made available to GeoSmart at the date of the report (and will have been assumed to be correct) and on current UK standards, codes, technology and practices as at that time. They do not purport to include any manner of legal advice or opinion. New information or changes in conditions and regulatory requirements may occur in future, which will change the conclusions presented here.

This report is confidential to the client. The client may submit the report to regulatory bodies, where appropriate. Should the client wish to release this report to any other third party for that party's reliance, GeoSmart may, by prior written agreement, agree to such release, provided that it is acknowledged that GeoSmart accepts no responsibility of any nature to any third party to whom this report or any part thereof is made known. GeoSmart accepts no responsibility for any loss or damage incurred as a result, and the third party does not acquire any rights whatsoever, contractual or otherwise, against GeoSmart except as expressly agreed with GeoSmart in writing.

For full T&Cs see <http://geosmartinfo.co.uk/terms-conditions>

Important consumer protection information

This search has been produced by GeoSmart Information Limited, Suite 9-11, 1st Floor, Old Bank Buildings, Bellstone, Shrewsbury, SY1 1HU.

Tel: 01743 298 100

Email: info@geosmartinfo.co.uk

GeoSmart Information Limited is registered with the Property Codes Compliance Board (PCCB) as a subscriber to the Search Code. The PCCB independently monitors how registered search firms maintain compliance with the Code.

The Search Code:

- provides protection for homebuyers, sellers, estate agents, conveyancers and mortgage lenders who rely on the information included in property search reports undertaken by subscribers on residential and commercial property within the United Kingdom.
- sets out minimum standards which firms compiling and selling search reports have to meet.
- promotes the best practice and quality standards within the industry for the benefit of consumers and property professionals.
- enables consumers and property professionals to have confidence in firms which subscribe to the code, their products and services.
- By giving you this information, the search firm is confirming that they keep to the principles of the Code. This provides important protection for you.

The Code's core principles

Firms which subscribe to the Search Code will:

- display the Search Code logo prominently on their search reports.
- act with integrity and carry out work with due skill, care and diligence.
- at all times maintain adequate and appropriate insurance to protect consumers.
- conduct business in an honest, fair and professional manner.
- handle complaints speedily and fairly.
- ensure that products and services comply with industry registration rules and standards and relevant laws.
- monitor their compliance with the Code.

Complaints

If you have a query or complaint about your search, you should raise it directly with the search firm, and if appropriate ask for any complaint to be considered under their formal internal complaints procedure. If you remain dissatisfied with the firm's final response, after your complaint has been formally considered, or if the firm has exceeded the response timescales, you may refer your complaint for consideration under The Property Ombudsman scheme (TPOs). The Ombudsman can award compensation of up to £5,000 to you if he finds that you have suffered actual loss as a result of your search provider failing to keep to the Code.

Please note that all queries or complaints regarding your search should be directed to your search provider in the first instance, not to TPOs or to the PCCB.

TPOs contact details:

The Property Ombudsman scheme
Milford House
43-55 Milford Street
Salisbury
Wiltshire SP1 2BP
Tel: 01722 333306
Fax: 01722 332296
Email: admin@tpos.co.uk

You can get more information about the PCCB from www.propertycodes.org.uk.

Please ask your search provider if you would like a copy of the search code

Complaints procedure

GeoSmart Information Limited is registered with the Property Codes Compliance Board as a subscriber to the Search Code. A key commitment under the Code is that firms will handle any complaints both speedily and fairly. If you want to make a complaint, we will:

- Acknowledge it within 5 working days of receipt.
- Normally deal with it fully and provide a final response, in writing, within 20 working days of receipt.
- Keep you informed by letter, telephone or e-mail, as you prefer, if we need more time.
- Provide a final response, in writing, at the latest within 40 working days of receipt.
- Liaise, at your request, with anyone acting formally on your behalf.

If you are not satisfied with our final response, or if we exceed the response timescales, you may refer the complaint to The Property Ombudsman scheme (TPOs): Tel: 01722 333306, E-mail: admin@tpos.co.uk.

We will co-operate fully with the Ombudsman during an investigation and comply with his final decision. Complaints should be sent to:

Alan White

Operations Manager

GeoSmart Information Limited

Suite 9-11, 1st Floor,

Old Bank Buildings,

Bellstone, Shrewsbury, SY1 1HU

Tel: 01743 298 100

alanwhite@geosmartinfo.co.uk

12. Terms and conditions, CDM regulations and data limitations



Terms and conditions can be found on our website:

<http://geosmartinfo.co.uk/terms-conditions/>

CDM regulations can be found on our website:

<http://geosmartinfo.co.uk/knowledge-hub/cdm-2015/>

Data use and limitations can be found on our website:

<http://geosmartinfo.co.uk/data-limitations/>