

WT01					
Window Type	Manufacturer	Structural Opening Size		U-Value	Finish
		SO Width	SO Height		
WT01	West Coast Windows	1585	2100	1.4	RAL 1014
Total: 2					

WT02					
Window Type	Manufacturer	Structural Opening Size		U-Value	Finish
		SO Width	SO Height		
WT02	West Coast Windows	1585	2400	1.4	RAL 1014
Total: 11					

WT03					
Window Type	Manufacturer	Structural Opening Size		U-Value	Finish
		SO Width	SO Height		
WT03	West Coast Windows	3498	2400	1.4	RAL 1014
Total: 3					

#### Windows


- Refer to architect's general arrangement & elevation drawings for window locations and handing. Lines indicating opening in elevations point to the hinge side.
- Dimensions are structural opening dimensions. **CONTRACTOR TO CHECK ALL SITE DIMENSIONS PRIOR TO ORDERING.** All windows to be sized to allow for installation and building tolerances.
- Except for AOV and egress windows, windows shall be fitted with a *lockable* security restrictor (without push button) to allow the windows to be opened a minimum of 75mm and to prevent the windows being opened more than 100mm. It should not be possible to operate the security restrictor from outside of window.
- Ironmongery to be to the Employers approval. Handles to incorporate window locks (key operated) to lock the window in the closed and night vent positions. Push button will not be acceptable. Ironmongery to wheelchair units require specialist handles. Extension poles not acceptable. Refer to adaptability schedule for requirements (if any) to wheelchair adaptable units.
- Allow for obscure/opaque glazing units to bathrooms, shower rooms WC's and Kitchen where worktop passes in front of glazing.
- Window boards shall be moisture resistant, MDF with a bull nosed exposed edge.
- Glazing throughout is to be hermetically sealed double/triple glazed, laminated/toughened glass units with internal glazing beads. To be factory glazed and finished where practical. Internally beaded.
- Refer to fire strategy drawings for locations of fire rated glazing.

#### Glazing



- Safety glass
- Refer to schedule for laminated glass requirements for SBD.

Top of transom below operable casement and tilt & turn to be no lower than 800mm above FFL.

Please note that window elevations shown are the elevation of the outside face of the window.

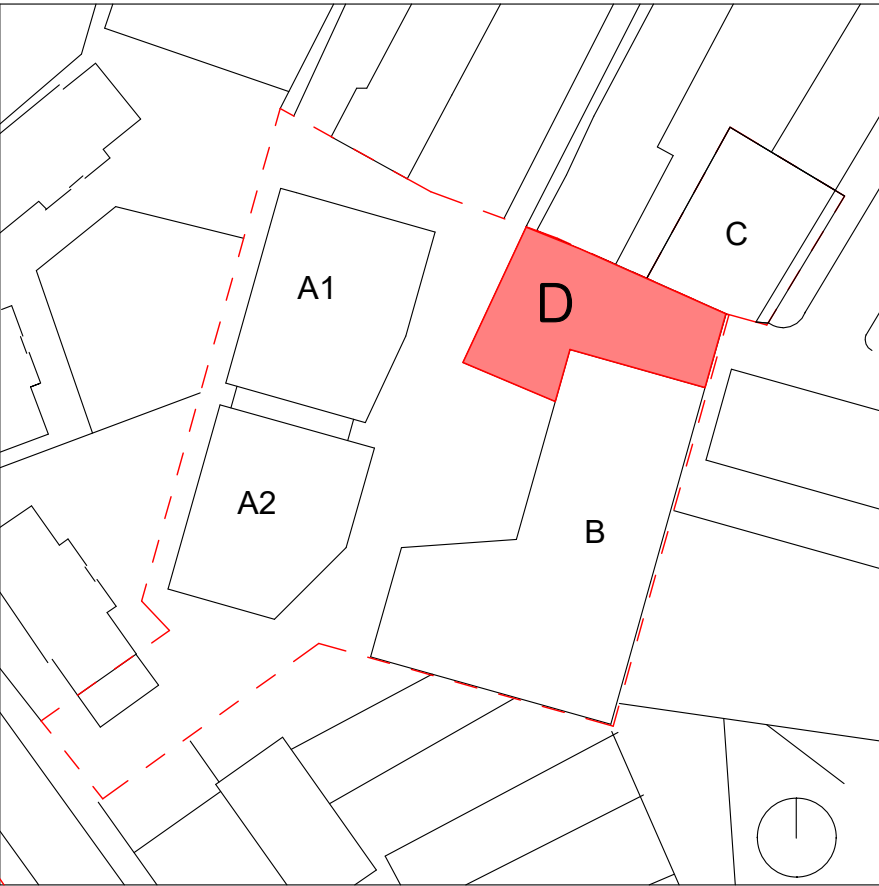

Key Plan

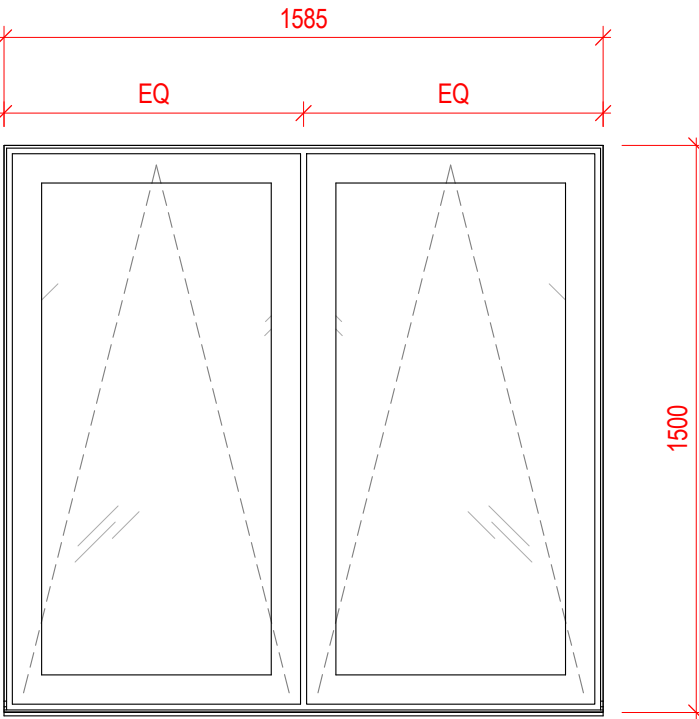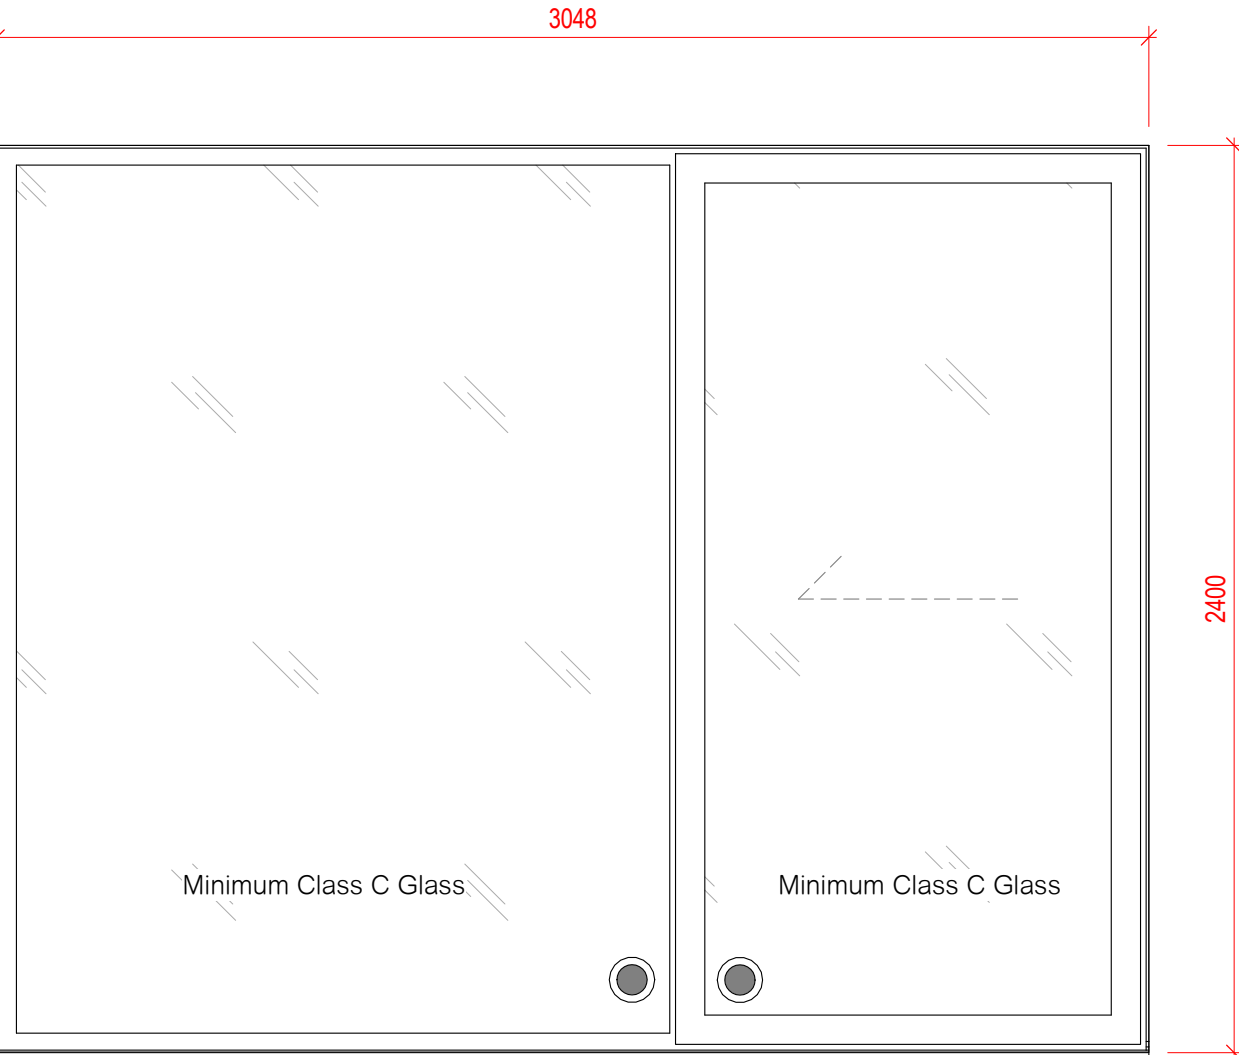

WT04					
Window Type	Manufacturer	Structural Opening Size		U-Value	Finish
		SO Width	SO Height		
WT04	West Coast Windows	3048	2400	1.4	RAL 1014
Total: 3					

WT05					
Window Type	Manufacturer	Structural Opening Size		U-Value	Finish
		SO Width	SO Height		
WT05	West Coast Windows	1585	1500	1.4	RAL 1014
Total: 1					

Revision	Date	Revised by
C03	22/11/21	CR
C02	06/10/21	CR
C01	10/09/21	CR
P2	05/08/21	CR
P1	21/05/21	CR
Revision	Date	Revised by

Space One Beadon Road  
London W8 0EA  
T 020 8237 8200  
mail@hunters.co.uk  
www.hunters.co.uk

**HNCC**  
25 Bertram Street,  
Highgate,  
London,  
N19 5DQ

## BLOCK D - WINDOW TYPES

Status:

hunters project number:  
M9920

client project number:  
HNCC

scale:  
1 : 20 @ A1

drawn by:  
CR

checked by:  
PG

drawing title:  
**HNCC HUN- 06- ZZ- DR- A- 54-61000**

revision  
**C03**

date  
22/11/21

revised by  
CR

Construction Issue full set for completeness

00.5m2m5m

Scale: 1:50