



1 SECTION AA
250 1:20 at A1

New slab build up to S.E. specification, see drawing 1191-S-101 Rev C. Cavity drainage membrane to be placed above 50mm closed-cell insulation, draining to the perimeter. Underfloor heating in Vaults 1 & 2.

New in-situ cast concrete stairs down to vaults, with marble floor finish.


Notes:
Drawings are based on survey data and may not accurately represent what is physically present.
Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.
All dimensions are in millimeters unless noted otherwise.
Purcell shall be notified in writing of any discrepancies.

Key Plan
not to scale

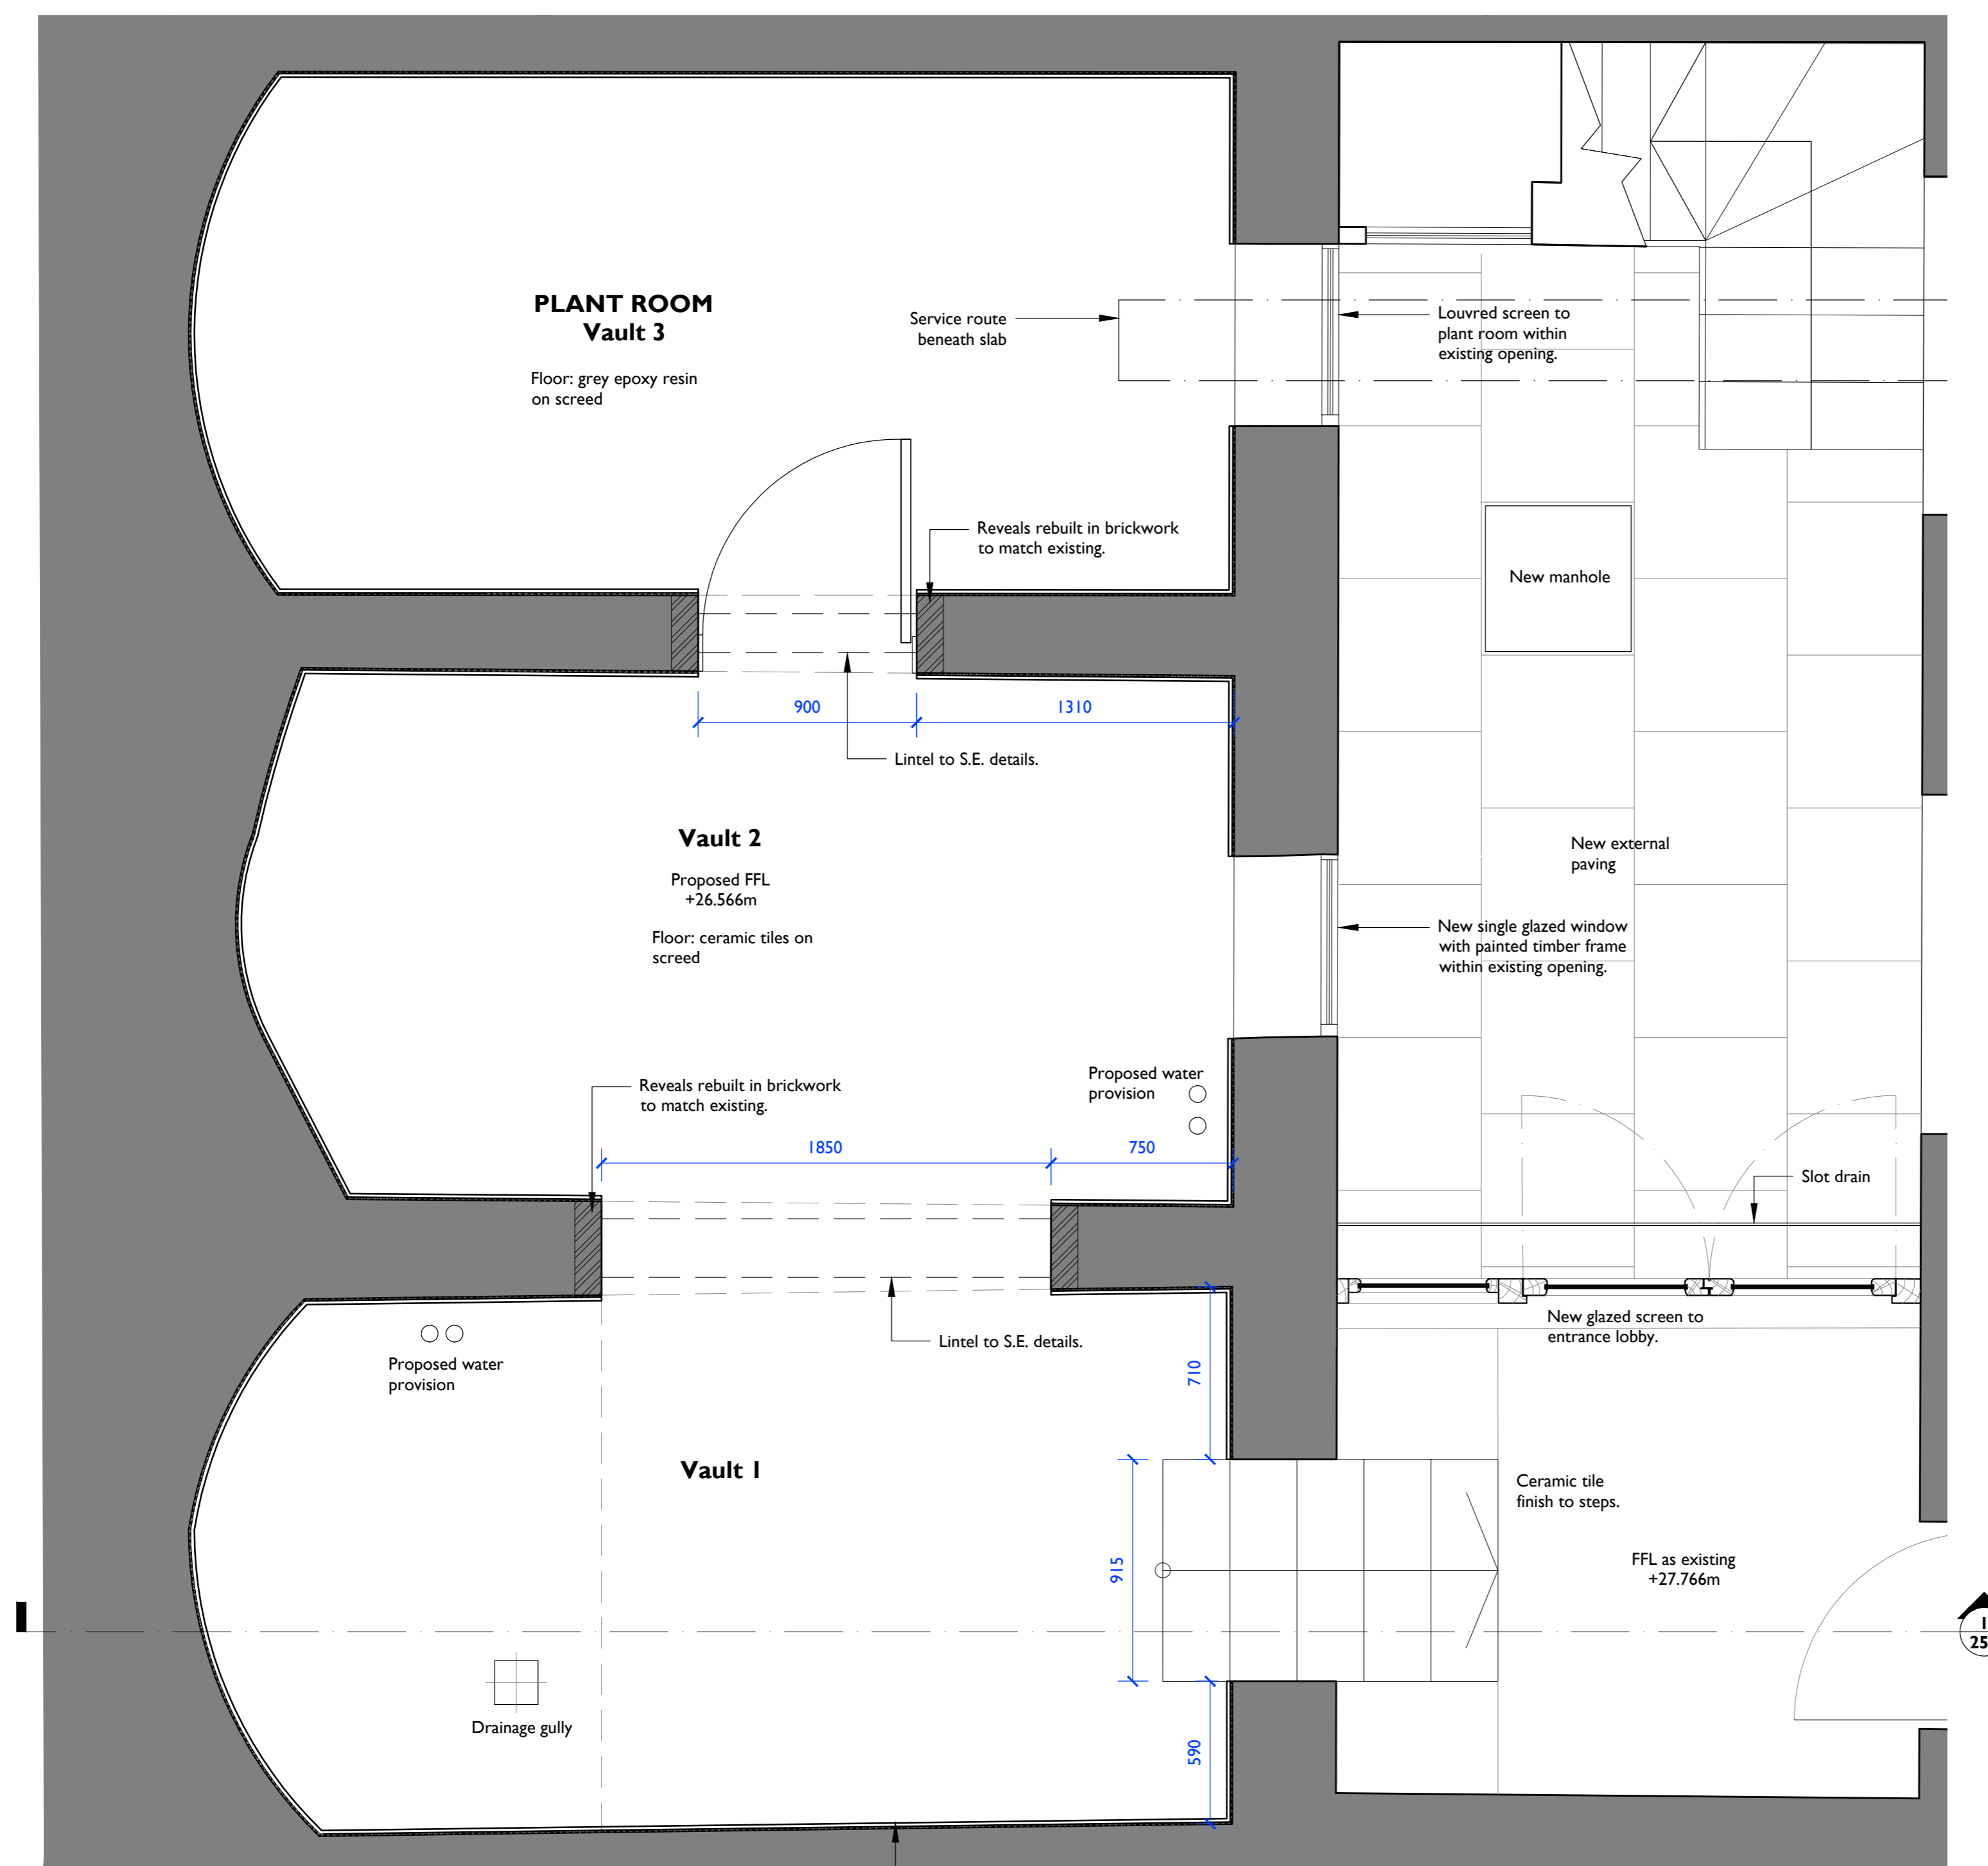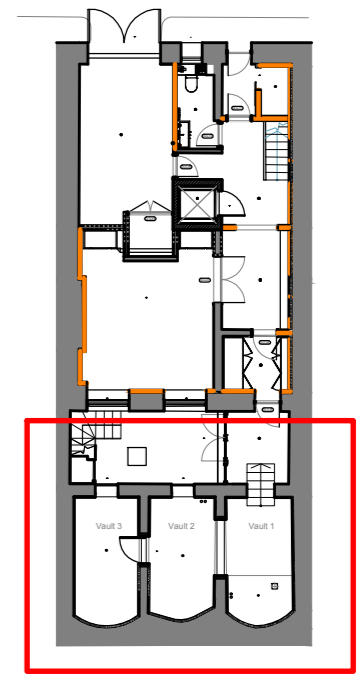

2 PROPOSED VAULT PLAN
250 1:20 at A1

Cavity drain membrane lining to all vault walls and soffits with render finish.

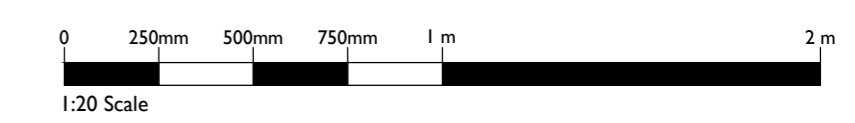


ISSUE	DATE	DRAWN	CHECKED	DESCRIPTION
First Issue	15 Sep 2016	DC	DC	
CLIENT	Grosvenor Propco Limited			
PROJECT	28 Chester Terrace			
DRAWING TITLE	Proposed Works to Vaults Plan and Sections			
SIZE & SCALE	A1P 1:20			
DRAWING STATUS	ISSUED FOR PLANNING			

JOB NUMBER 236868

DRAWING NO. 250

REVISION -

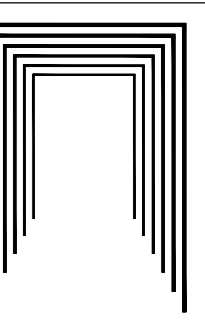

PURCELL