

- I ALL EXISTING FIREPLACES, HEARTHSTONES ANAD GRATES TO BE RETAINED AND REPLACED WHERE REQUIRED NEW SURROUNDS SPECIFIED AND INSTALLED IN ACCORDANCE WITH CONSERVATION BEST PRACTICE
- ALL SHUTTERS TO BE RESTORED TO WORKING ORDER AND REPLACED WHERE REQUIRED IN ACCORDANCE WITH CONSERVATION BEST PRACTICE
- CEILING ROSE TO BE REPLACED TO MATCH ORIGINAL IN ACCORDANCE WITH CONSERVATION BEST PRACTICE
- (4) SKIRTING AND CORNICING TO BE RESTORED / REPLACED AS PER ORIGINAL FEATURES IN ACCORDANCE WITH CONSERVATION BEST PRACTICE
- 5 NEW CONTEMPORARY FEATURE LIGHTING IN HALLWAY AND STAIRWELL
- 6 CONTEMPORARY AND UNOBTRUSIVE ACCESS SYSTEM AND MAIL BOXES FIXED TO WALLS WITHIN ENTRANCE PORCH
- FLOOR JOISTS TO BE STRENGTHENED LOCALLY AND REPLACED WHERE REQUIRED TO RESTORE STRUCTURAL INTEGRITY AND TAKE NEW LOADS
- 8 ORIGINAL FLOORING RESTORED AND REPLACED WHERE POSSIBLE OR NEW TIMBER / STONE FLOORING
- ALL WALLS TO BE SKIMMED AND PAINTED IN HERITAGE APPROVED PAINT RANGE COLOUR TBC IN ACCORDANCE WITH CONSERVATION BEST PRACTICE
- ORIGINAL STONE AND TIMBER STAIRCASES TO BE RESTORED IN ACCORDANCE WITH IN ACCORDANCE WITH CONSERVATION BEST
- PRACTICE (II) CARPET ON STAIRCASE TO BE REPLACED WITH NEW RUNNER
- NEW BRICK CLOSET WING WITH SLATE ROOF TO MATCH EXISTING ADJOINING BUILDING

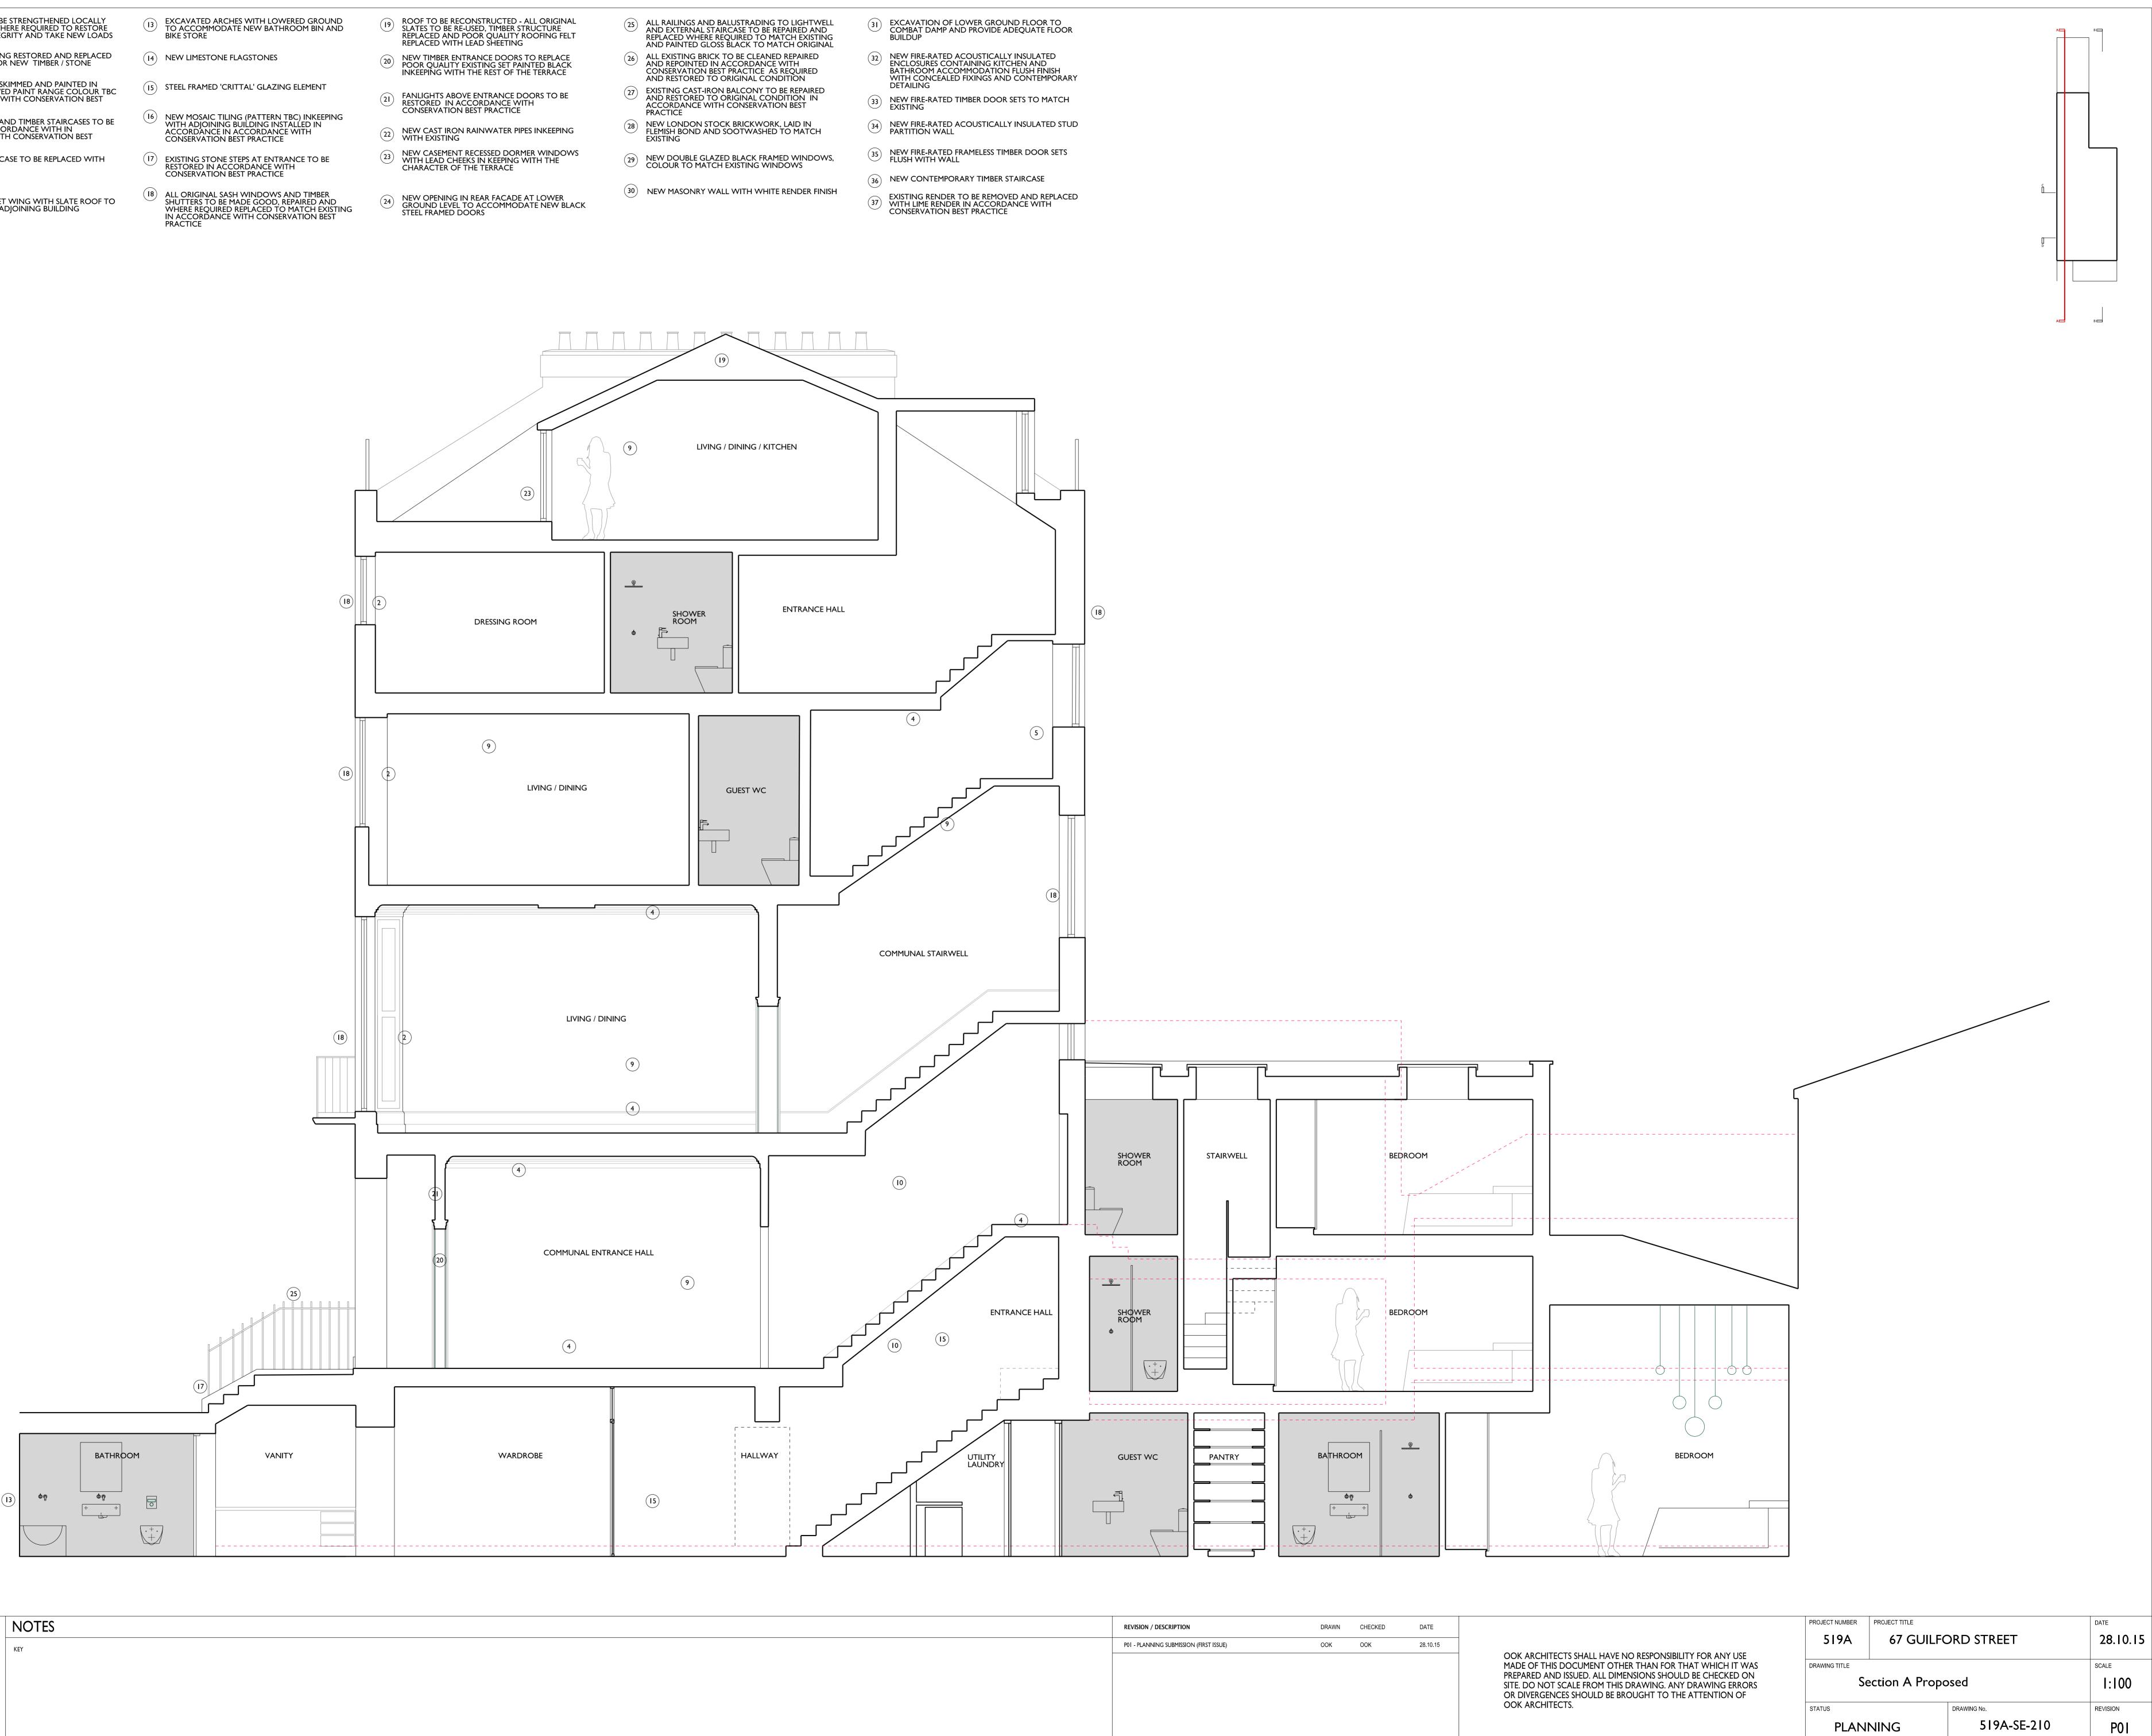



OOK ARCHITECTS 119 Farringdon Road London EC1R 3DA

studio@ookarchitects.com www.ookarchitects.com

(19)	ROOF TO BE RECONSTRUCTED - ALL ORIGINAL SLATES TO BE RE-USED, TIMBER STRUCTURE REPLACED AND POOR QUALITY ROOFING FELT REPLACED WITH LEAD SHEETING
20	NEW TIMBER ENTRANCE DOORS TO REPLACE POOR QUALITY EXISTING SET PAINTED BLACK INKEEPING WITH THE REST OF THE TERRACE
21	FANLIGHTS ABOVE ENTRANCE DOORS TO BE RESTORED IN ACCORDANCE WITH CONSERVATION BEST PRACTICE
22	NEW CAST IRON RAINWATER PIPES INKEEPING WITH EXISTING
23	NEW CASEMENT RECESSED DORMER WINDOWS WITH LEAD CHEEKS IN KEEPING WITH THE CHARACTER OF THE TERRACE
24)	NEW OPENING IN REAR FACADE AT LOWER GROUND LEVEL TO ACCOMMODATE NEW BLACK STEEL FRAMED DOORS

29	NEW DOUBLE GLAZED BLACK FRAMED WINDOWS, COLOUR TO MATCH EXISTING WINDOWS
30	NEW MASONRY WALL WITH WHITE RENDER FINISH