


FLOOR TYPE FT-09 SCALE 1:5

EAST BLOCK BASEMENT

- Finishes to interior designer specification
- SCR-01 65mm Proprietary Screed 2.
- SCR-06 10mm Acoustic Mat (10mm Cellect 3. Yelofon HD10+ or similar approved)
- **INS-09** Rigid Insulation
- RC Ground Slab on Insulated protection layer 5. below slab. To SE design and specification

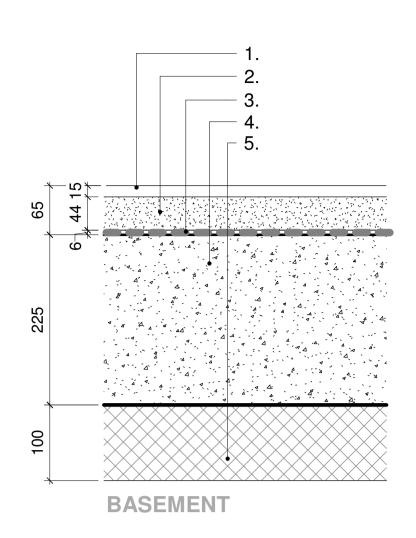


FLOOR TYPE FT-10 2 SCALE 1:5

GOUND FLOOR COMMUNAL ABOVE BASEMENT

- Finishes to interior designer specification
- **SCR-01** Proprietary quick-drying Screed
- SCR-05 6mm Acoustic Mat 3
- 225mm RC Slab to SE specification 4.
- **INS-02** 100mm Soffit Insulation 5.


Acoustic Criteria: + 5dB improvement over Part E requirement (achieved min 50 dB D $_{nT,w}$ + C_{tr} ,max 57 L'nT,w dB)

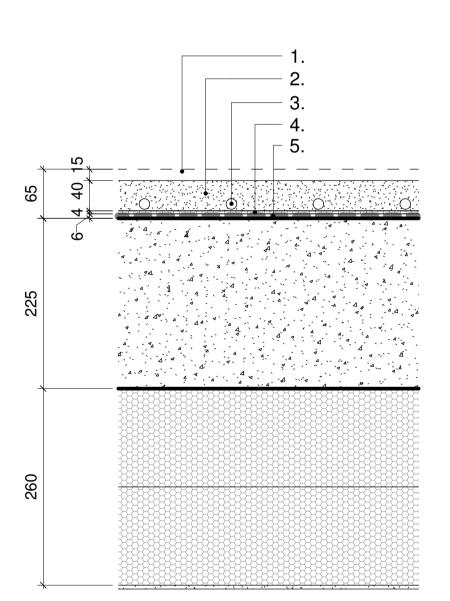

EXTERIOR

FLOOR TYPE FT-12a 6 SCALE 1:5 **EAST BLOCK FIRST FLOOR - RESIDENTIAL** (PROJECTING AREAS)


- Finishes to interior designer specification
- SCR-01 Proprietary quick-drying Screed
- FXG-08 Underfloor Heating System 3
- **INS-11** Underfloor Heating Mat
- SCR-05 6mm Acoustic Mat
- 225mm RC Slab to SE specification 6
- **INS-10** External Soffit non combustible Insulation

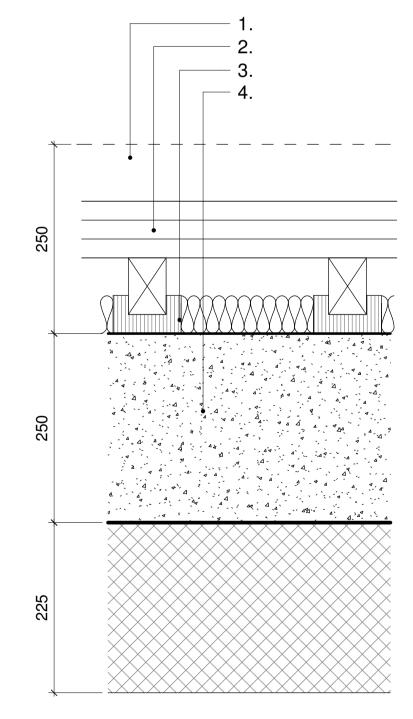

FLOOR TYPE FT-09a 7 SCALE 1:5

EAST BLOCK BASEMENT

- Finishes to interior designer specification Dry floor boards (25x3) 2.
- 100mm Acoustic Floor build up (acoustic cradle 3. system) with 50mm acoustic insulation.
- RC Ground Slab on Insulated protection layer 4. below slab. To SE design and specification

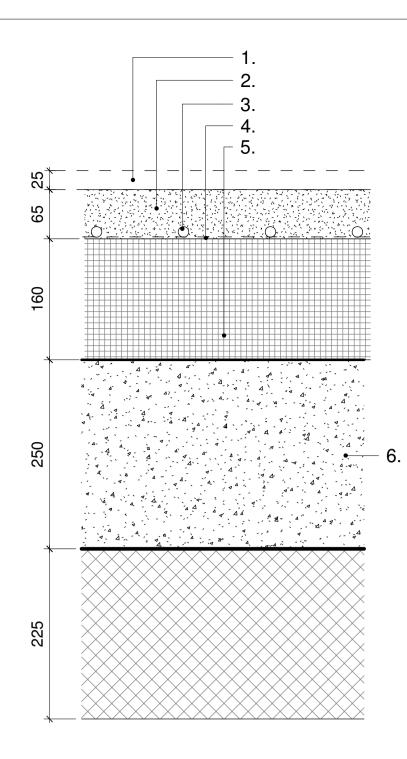


FLOOR TYPE FT-11

(3) SCALE 1:5

LOWER GROUND FLOOR -RESIDENTIAL

- Finishes to interior designer specification 1.
- SCR-01 Proprietary quick-drying Screed 2.
- FXG-08 Underfloor Heating System 3.
- Separating Polythene Layer 4.
- **INS-09** 160mm Rigid Insulation 5.
- RC Ground Slab on Insulated protection 6. layer below slab. To SE design and specification

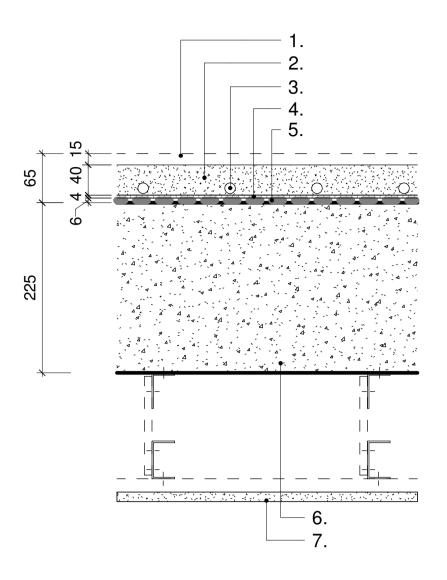

FLOOR TYPE FT-12 (4)

SCALE 1:5

EAST BLOCK INTERMEDIATE FLOOR -RESIDENTIAL

- Finishes to interior designer specification 1.
- **SCR-01** Proprietary quick-drying Screed 2.
- FXG-08 Underfloor Heating System 3
- **INS-11** Underfloor Heating Mat 4
- SCR-05 6mm Acoustic Mat 5.
- 225mm RC Slab to SE specification 6.
- CLG-03 Suspended Ceiling System (CLG-04 7. to bathroom location)

Floor finish in Shared Ownership Units:

FLH-02 Porcelain Tiles - Bathroom FLS-06 Vinyl Plank Flooring - LKD/Hall/Stores FLS-07 Wall to wall Carpet - Bedroom

Private units: refer to Interior Designer Specification


Acoustic Criteria: + 5dB improvement over Part E requirement (achieved min 50 dB D $_{nT,w}$ + Ctr ,max 57 L'nT,w dB)




0

1.	FLS
	Inte
2.	SCF
3.	SCF
4.	225
5.	CLC

requirement dB)

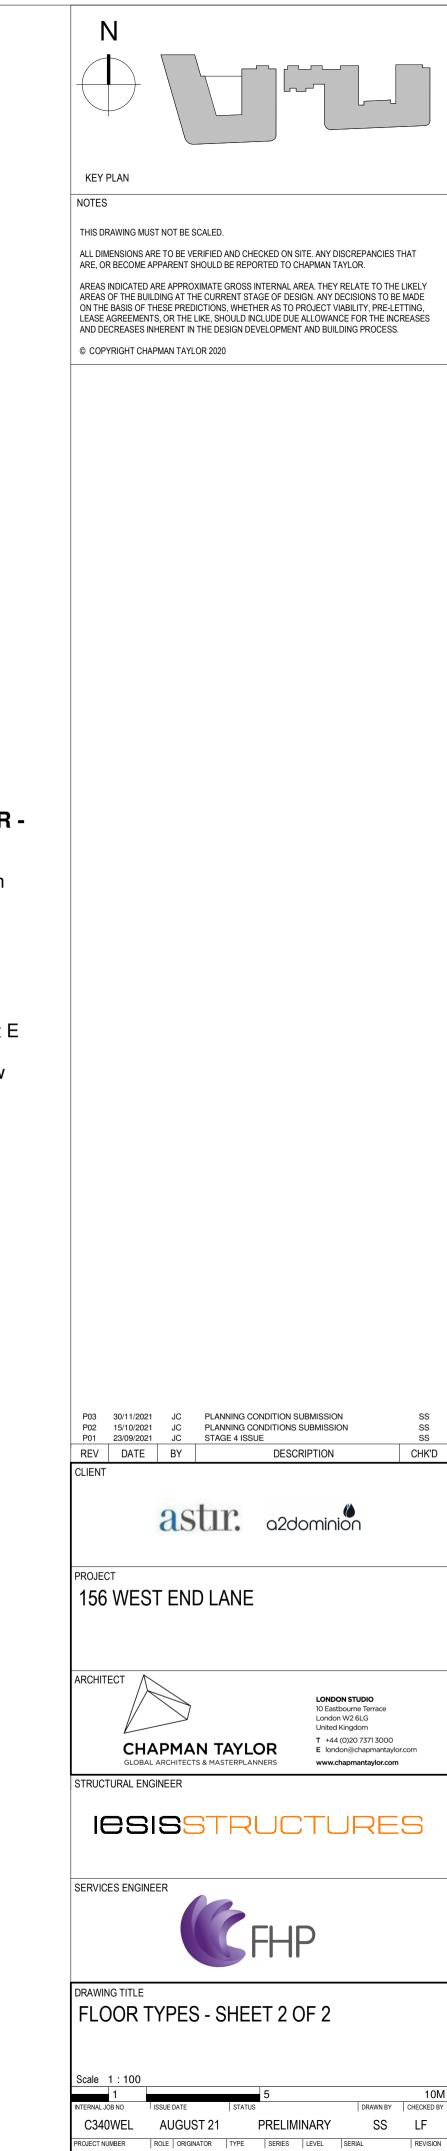

0001 A CTA DRG 43 ZZ 0002 P03

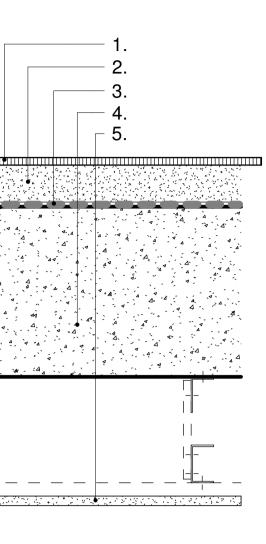

FLOOR TYPE FT-13

EAST BLOCK INTERMEDIATE FLOOR -

S-08 Carpet Tile (to be confirmed with erior Designer) **R-01** Proprietary quick-drying Screed CR-05 6mm Acoustic Mat 5mm RC Slab to SE specification CLG-02 Suspended Ceiling System

Acoustic Criteria: + 5dB improvement over Part E (achieved min 50 dB D $_{nT,w}$ + C_{tr} ,max 57 L'nT,w