

BAYHAM PLACE

BAYHAM STREET

CROWNDALE ROAD

Copyright: All rights reserved. This drawing must not be reproduced without permission.

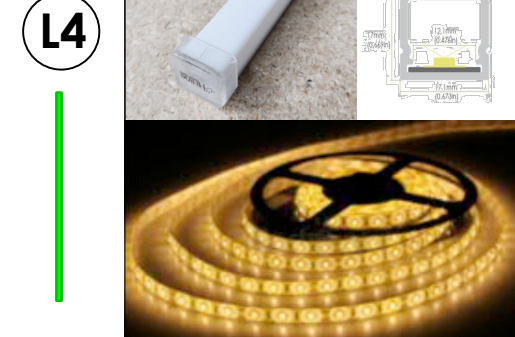
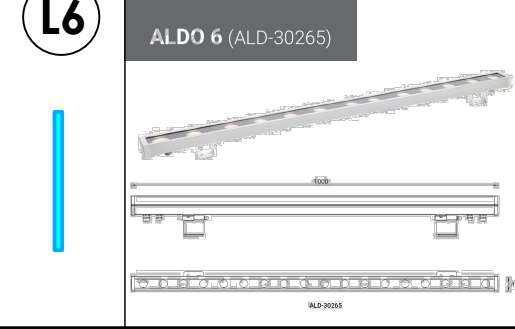
Only the original drawing should be relied upon. Contractors, subcontractors and suppliers must verify all dimensions on site before commencing any work or making any shop drawings.

All shop drawings to be submitted to the architect for comment prior to fabrication.

This drawing is to be read in conjunction with the Architect's specification, bills of quantities / schedules, structural, mechanical & electrical drawings and all discrepancies are to be reported to the architect.

Do not scale from this drawing. Dimensions are in millimetres unless otherwise stated.


revision / date / amendments
- / 28/02/22 / ISSUED FOR PLANNING

IMAGE	QTY	SPECIFICATIONS
	4	DOMES FLOOD LIGHTING 120w LED RGBWW [Red/Green/Blue/WarmWhite] Fitted with circular 80deg beam shaper for maximum flood width IP66 ingress protection To illuminate the Dome on all sides. FITTING MODEL : Pulsar LuxEOS Flood 18 QuadVC RGBA 2700K MODEL FEATURES : Remote device management - tunable white FITTING SIZE : 350(H) x 420(W) x 150(D)mm FITTING COLOUR : White (for better camouflage to match facade) OUTPUT : 4120 Lumens (max)
	3	FACADE FLOOD LIGHTING 120w LED RGBWW [Red/Green/Blue/WarmWhite] Fitted with circular 80deg beam shaper for maximum flood width IP66 ingress protection Located one in each planter on a 1m stalk/pole FITTING MODEL : Pulsar LuxEOS Flood 18 QuadVC RGBW 2700K MODEL FEATURES : Remote device management - tunable white FITTING SIZE : 350(H) x 420(W) x 150(D)mm FITTING COLOUR : Black OUTPUT : 4120 Lumens (max)
	4	IN-GROUND UP-LIGHTER - RECESSED IN TERRACE FLOOR 50W within terrace uplighter, in-ground LED Paver Fitting RGBWW Circ ; 20 - Ellip - 60x10 - Tilt : 20 IP67 ingress protection Located at base of 4 columns to fan towards the building FITTING MODEL : Pulsar LuxEOS 9 Inground QuadVC RGBW 2700K MODEL FEATURES : Remote device management - tunable white FITTING SIZE : 295mm dia. (ext.) - 255mm dia. (int) FITTING COLOUR : Black or silver OUTPUT : 1723 Lumens (max)
	30m	LINEAR TAPE LIGHTING 24v 14.4W/m IP rated super warm white LED tape light Tape light housed in anodised aluminium extrusion custom RAL to match facade colour To underside of external coving at GF level. FITTING MODEL : HI-LINE (tape) and OPTONICA (extrusion) or similar MODEL FEATURES : Tape housed in aluminium extrusion IP67/IP68 FITTING SIZE : extrusion approx. 17 x 17 mm FITTING COLOUR : to match facade - white OUTPUT : 3600 Lumens/m (max)
	3	SPOT LIGHTS ABOVE ENTRANCE DOORS 2 x 8W Dual Spotlight Fitting - Surface mounted With Warm-White intergral LED lightsource IP65 ingress protection Fitted above each entrance door FITTING MODEL : Bayville Twin Spot IP65 240V MODEL FEATURES : Adjustable FITTING SIZE : 100(H) x 170(W) x 122(D)mm FITTING COLOUR : Black OUTPUT : 897 Lumens (56 Lumens/W) - 3000K Warm White
	2	LINEAR FACADE LUMINAIRE 28w 1000mm Surface LED RGBWW Linear fitting IP66 ingress protection Fitted symmetrically above cornice between 1st and 2nd floors as shown on elevation drawing. FITTING MODEL : Ligman ALDO 6 (ALD-30265) MODEL FEATURES : Not visible from street level FITTING SIZE : 1000(L) x 42(W) x 53(D)mm FITTING COLOUR : to match facade OUTPUT : 1124 - 1634 Lumens (40-58 Lumens/W) - 3000K Warm White

Reference : Blinding Light - Lighting Proposal for Front Facade - 200818/1_Rev 4 - 24.02.2021
with latest updates from Scott Cruickshank by email on 22.02.2022

LEGEND
Existing Building Fabric KOKO née
Camden Palace Theatre (1900)

28.02.22



1:100
0 1 2 3 4 5 8m

PLANNING

Archer Humphryes Architects

Basement
Central House
142 Central Street
London, United Kingdom
EC1V 8AR
T: +44 (0) 20 7251 8555

project title	KOKO + Hope & Anchor + Bayham Place, Camden, London
drawing title	Proposed First Floor Plan LIGHTING
drawing number	AAA/ KKR / PR /101
scale	1:100 B.A.I
date	25.10.21
drawn	PD
checked	DA
revision	-