


Product Code:
S450-69620-2936

Stone Classification
Granite

Source
Portugal 

Date Created: 31/03/21

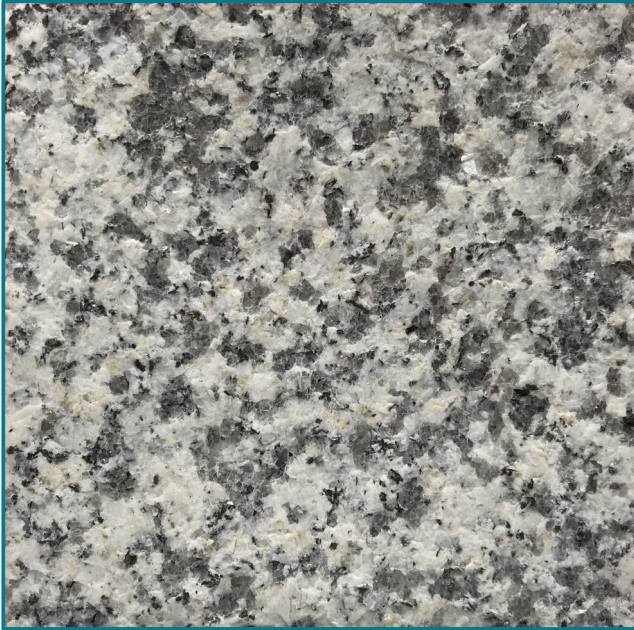

Please note:

Image shows Flame Textured tonality variation and finish;
Natural variations may occur between image and finished
product.

0  5 mm



Project Shot:

Shotblasted Portuguese Silver Grey Granite Setts



Test	Value	BS EN
Apparent density (g/cm ³)	2.63	1936: 2006
Water Absorption (%)	0.3	13755: 2008
Abrasion Resistance (mm)	16	14157: 2017
Flexural Strength (Mpa) LEV	12.4	12372: 2006
Flexural Strength (Mpa) Mean	14.6	12372: 2006
Compressive Strength (Mpa) LEV	140.9	1926: 2006
Compressive Strength (Mpa) Mean	159	1926: 2006
Freeze thaw: Before / After (Mpa)	162/165	12371: 2010
Slip Resistance Flame Textured Dry/Wet	92/74	14231: 2003
Open Porosity (%)	0.6	1936: 2006
PPV Shotblasted	57	7932: 2003

British Standards:

Paving, Setts and Kerbs are
CE marked to BS EN 1341,
1342 and 1343.

Tolerances:

Stone dimensions are
produced to meet class 1
specification as a minimum.

Quality Control:

Stone supplied in
accordance with ISO 9001
quality standards.

Maintenance:

Clean warm water with natural soap would be the
most common method of cleaning the stone.

We also offer a wide range specialist cleaning
products and impregnators. Please contact our
technical department for any further information.

*Inspiring beautiful
landscapes*