




Upstand
(Drg.No: D0901/03-00W_0-4Deg_201-ExtInt-S-DB_001)

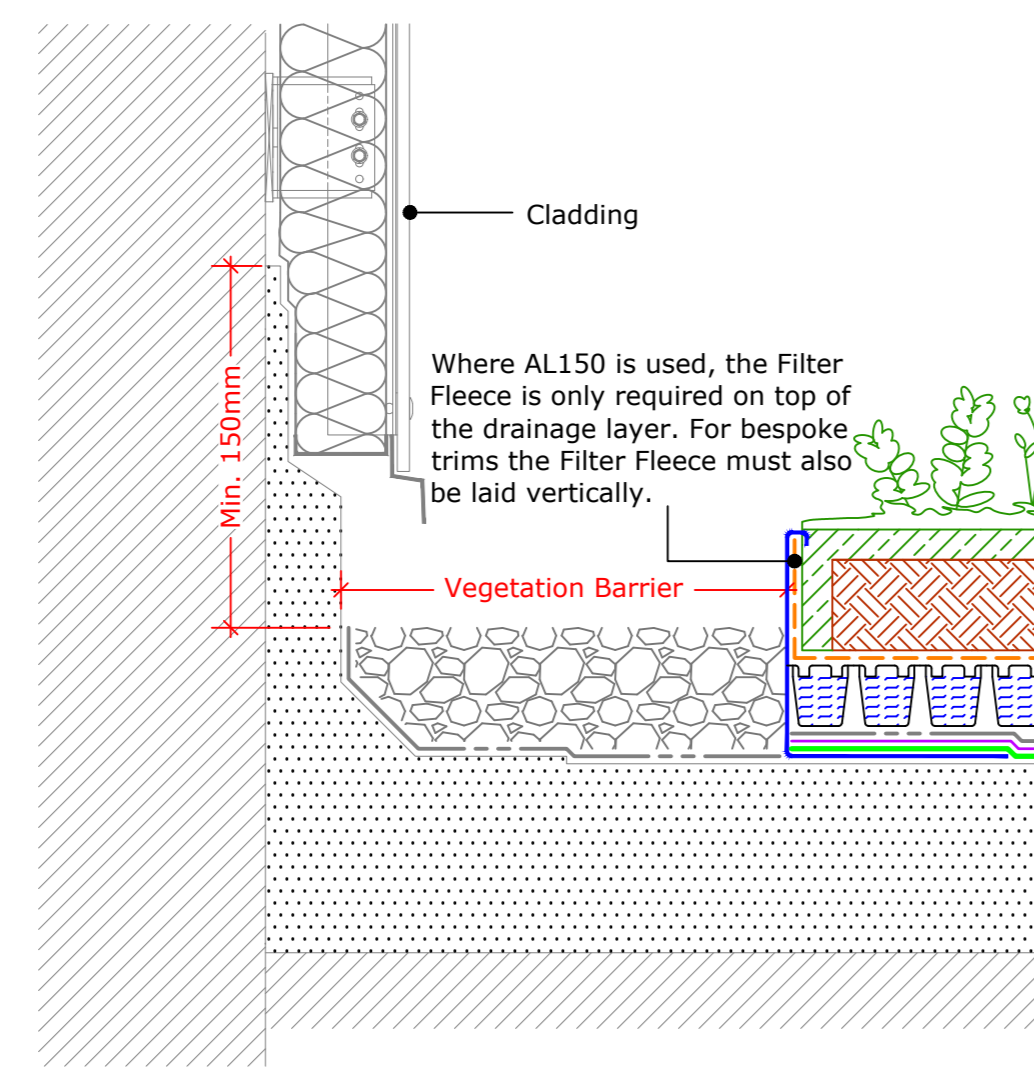


Upstand to Vertical Cladding or Slates/Tiles
(Drg.No: D0901/03-00W_0-4Deg_201-ExtInt-S-DB_002)

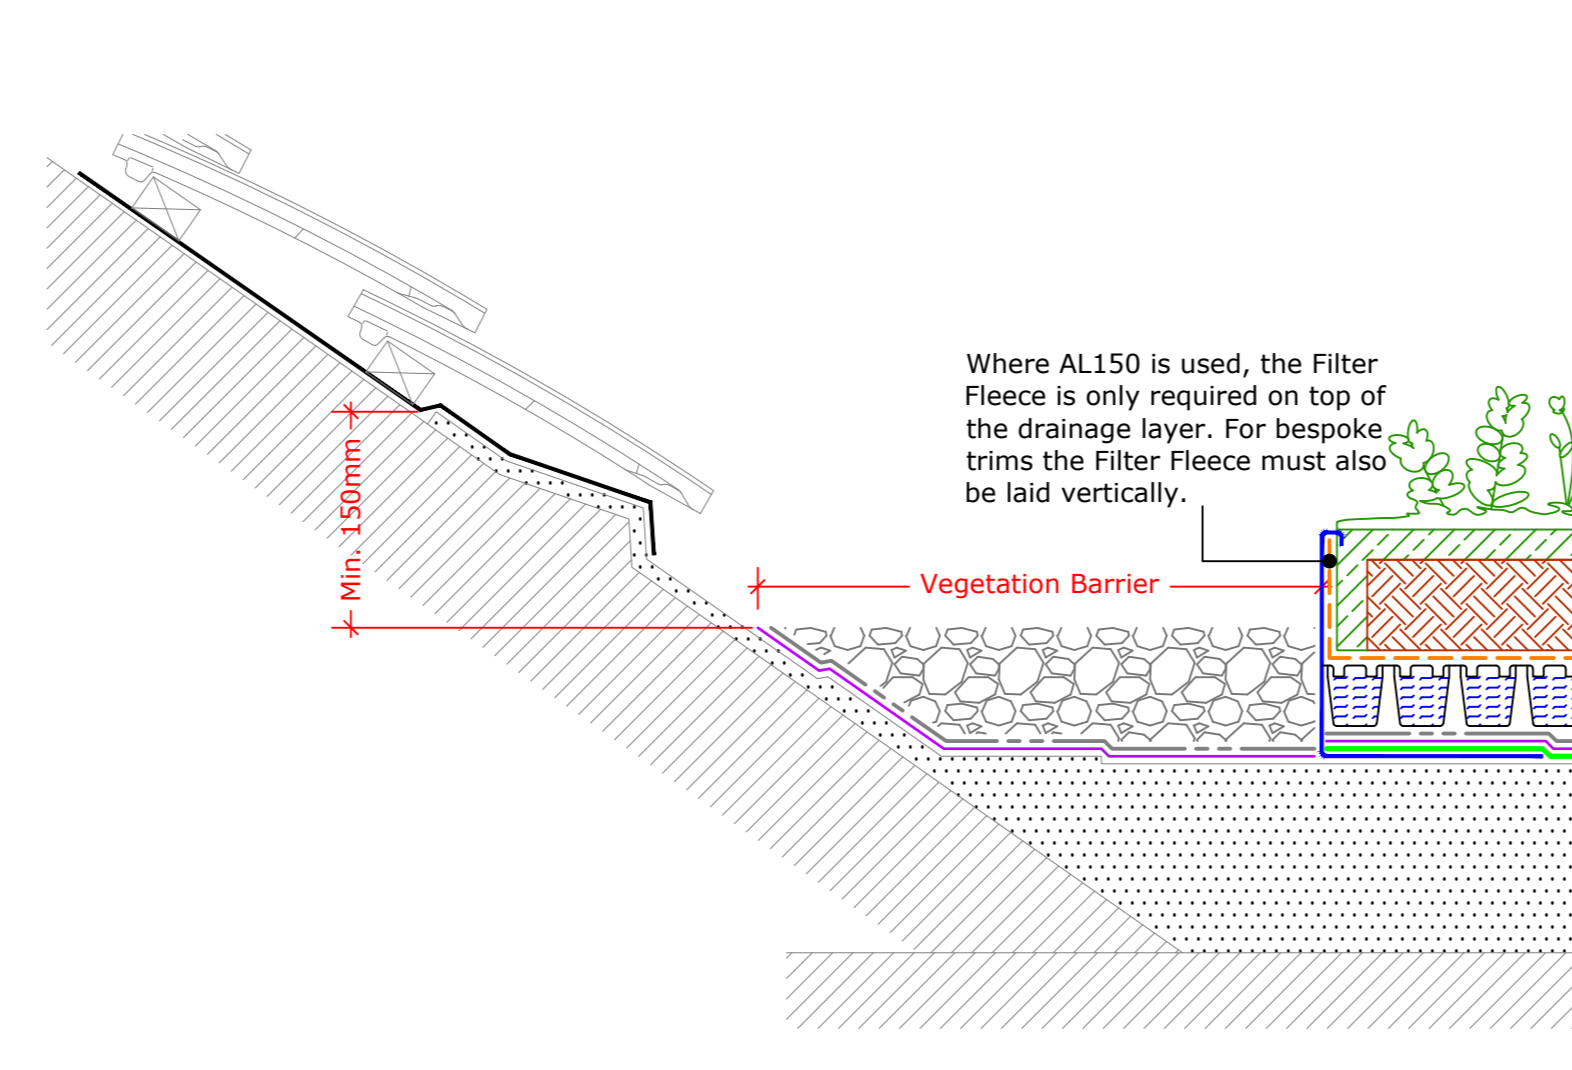


Upstand to Pitched Roof
(Drg.No: D0901/03-00W_0-4Deg_001-ExtInt-S-DB_004)

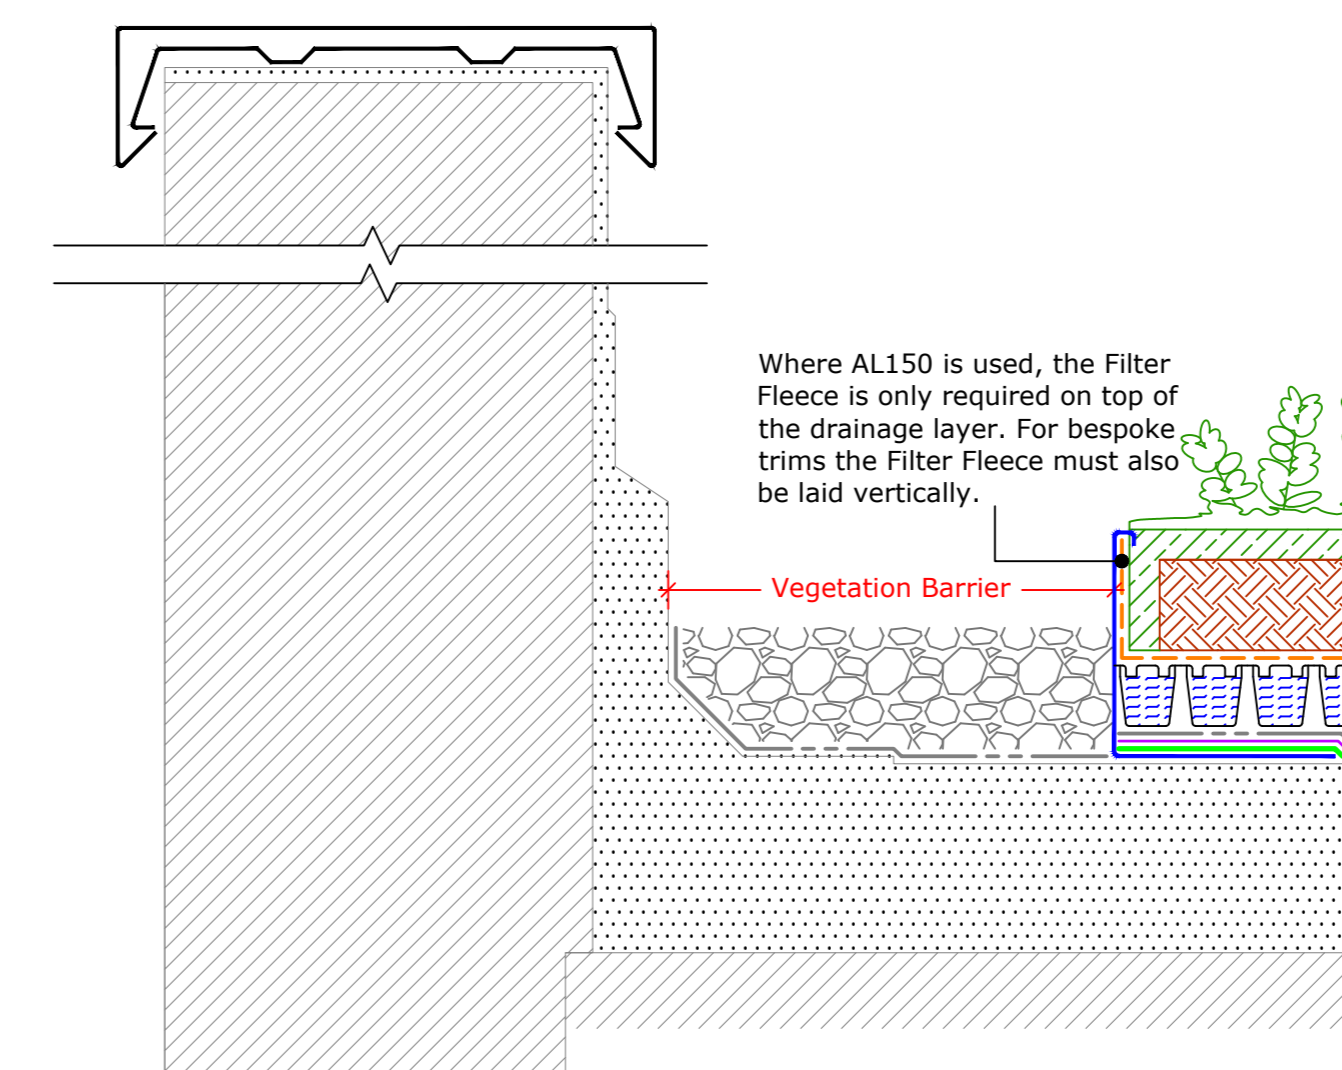


Upstand to Parapet
(Drg.No: D0901/03-00W_0-4Deg_203-ExtInt-S-DB_003)

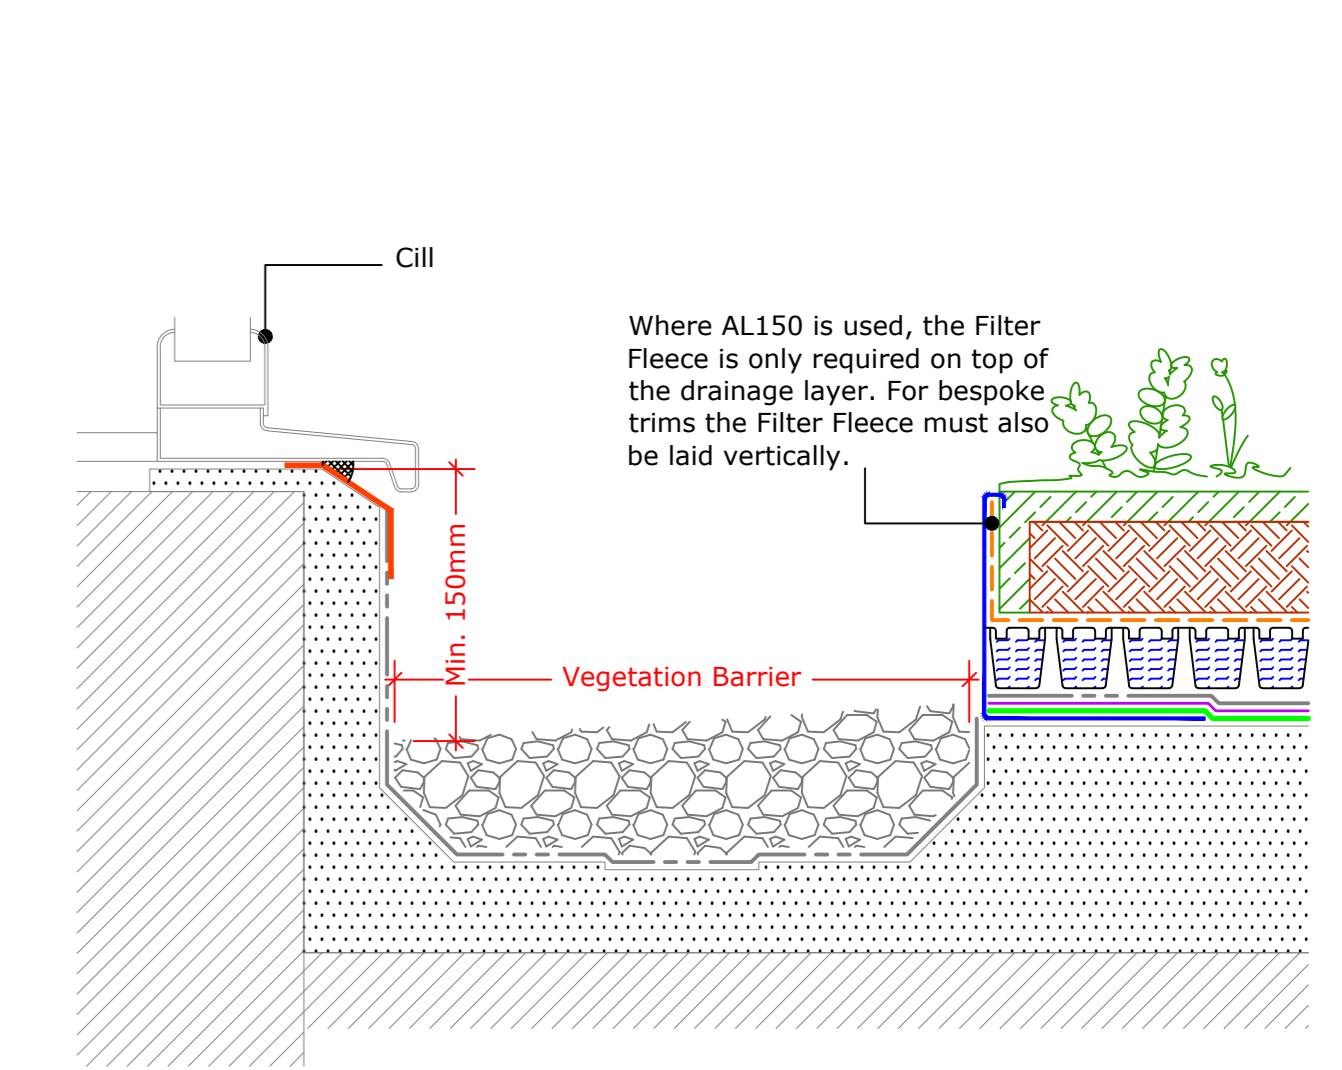


Internal Gutter to Clerestory Window
(Drg.No: D0901/03-00W_0-4Deg_206-ExtInt-S-DB_003)

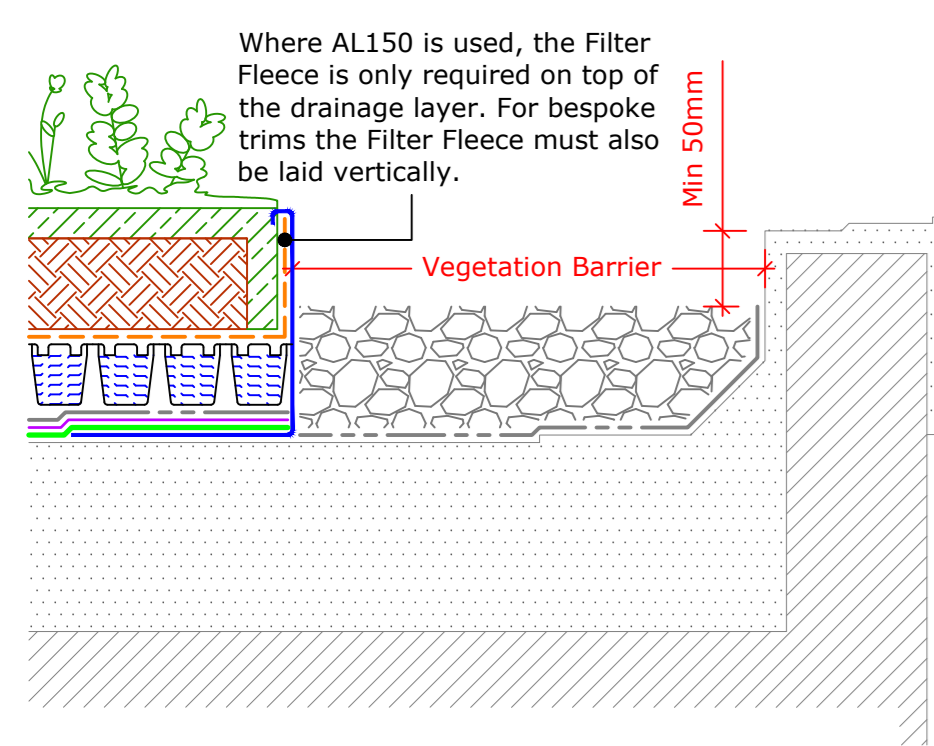


Perimeter Kerb
(Drg.No: D0901/03-00W_0-4Deg_002-ExtInt-S-DB_001)

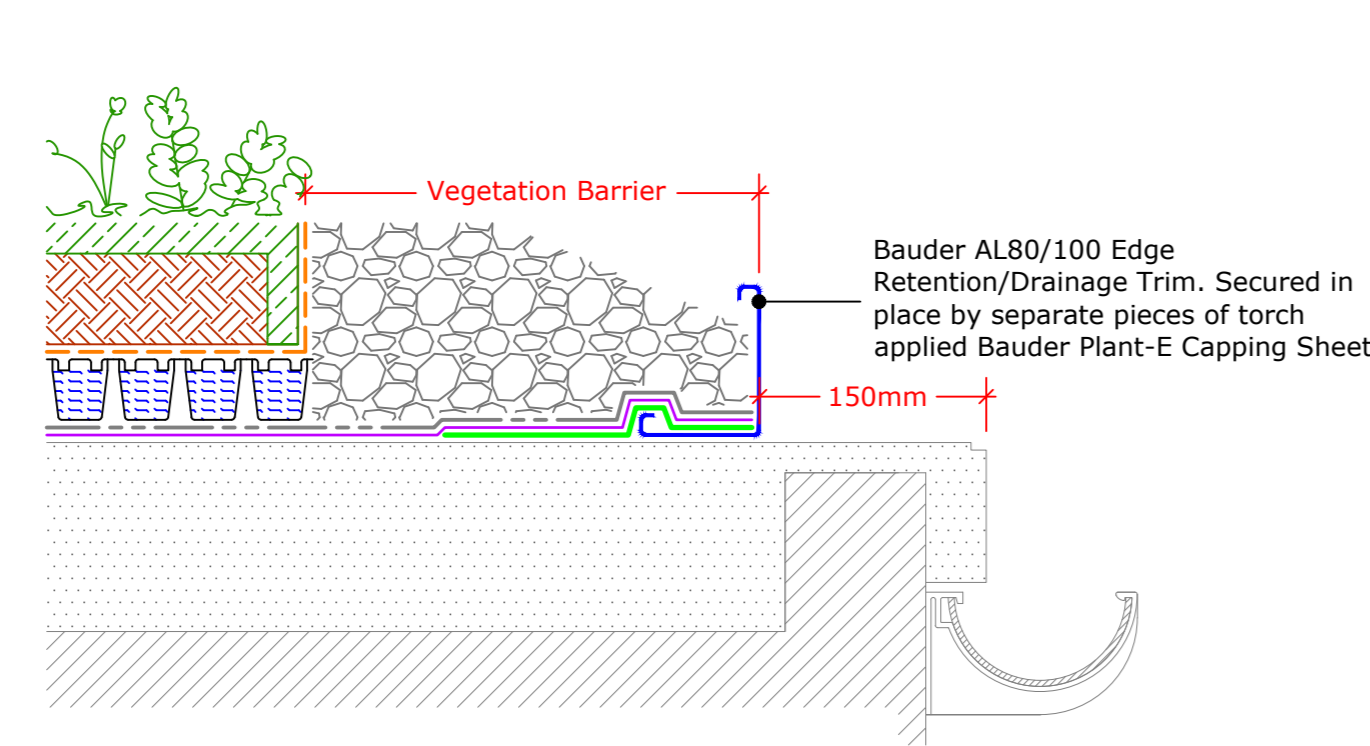


External Gutter
(Drg.No: D0901/03-00W_0-4Deg_006-ExtInt-S-DB_005)

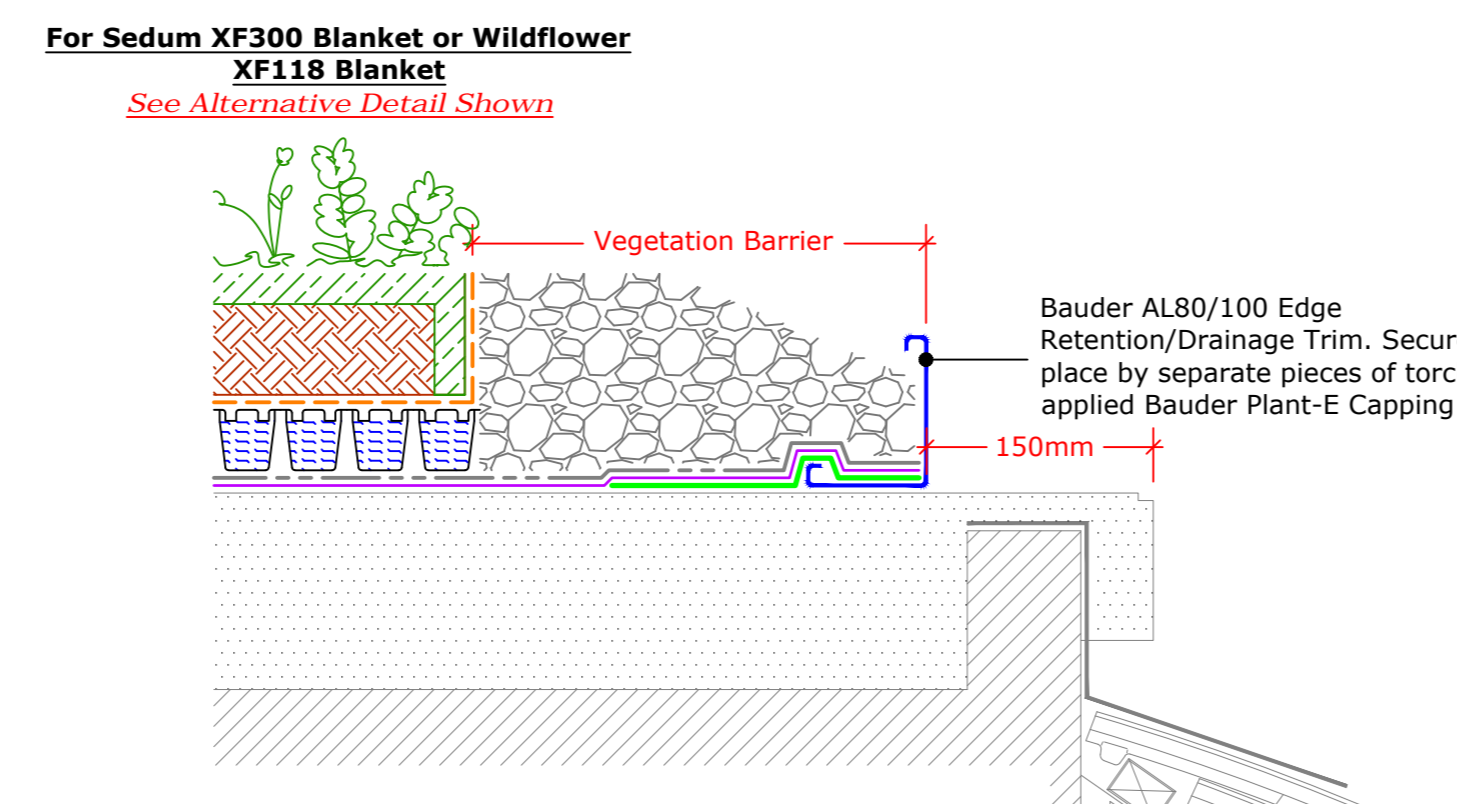


Detail to Mansard Roof - Extensive Only
(Drg.No: D0901/03-00W_0-4Deg_006-ExtInt-S-DB_006)

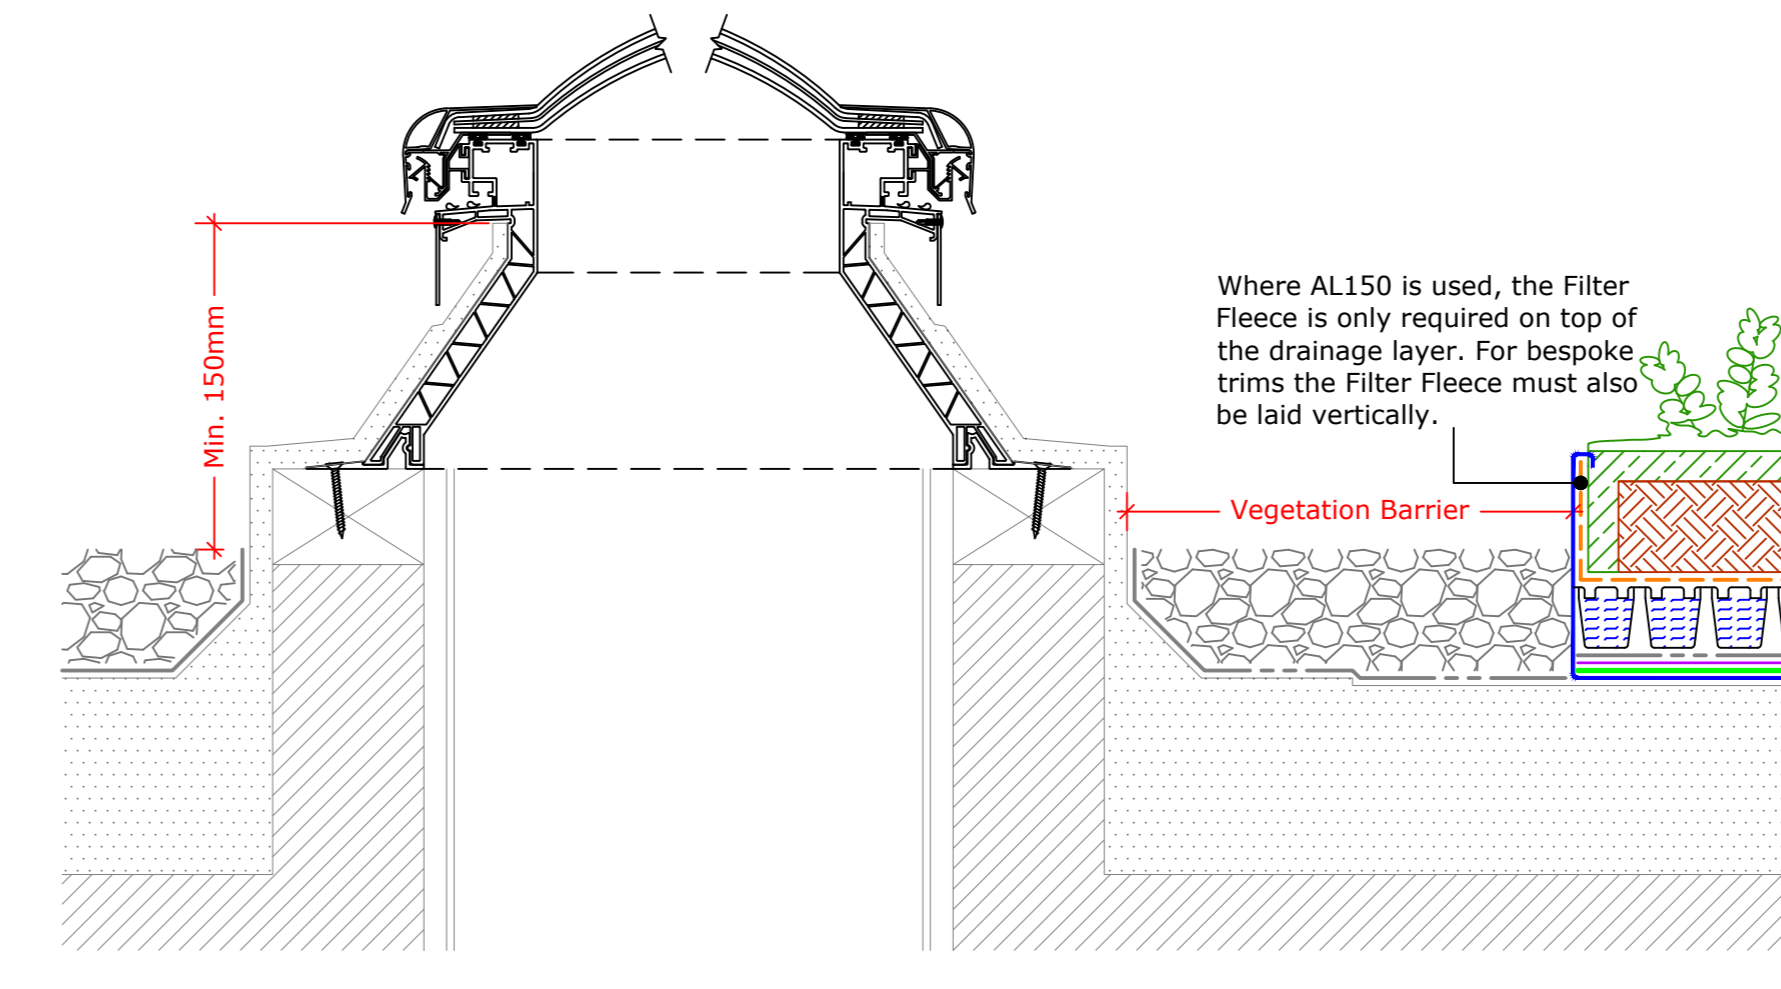


Upstand to Bauder Rooflight - Euroglaze
(Drg.No: D0901/03-00W_0-4Deg_008-ExtInt-S-DB_001)

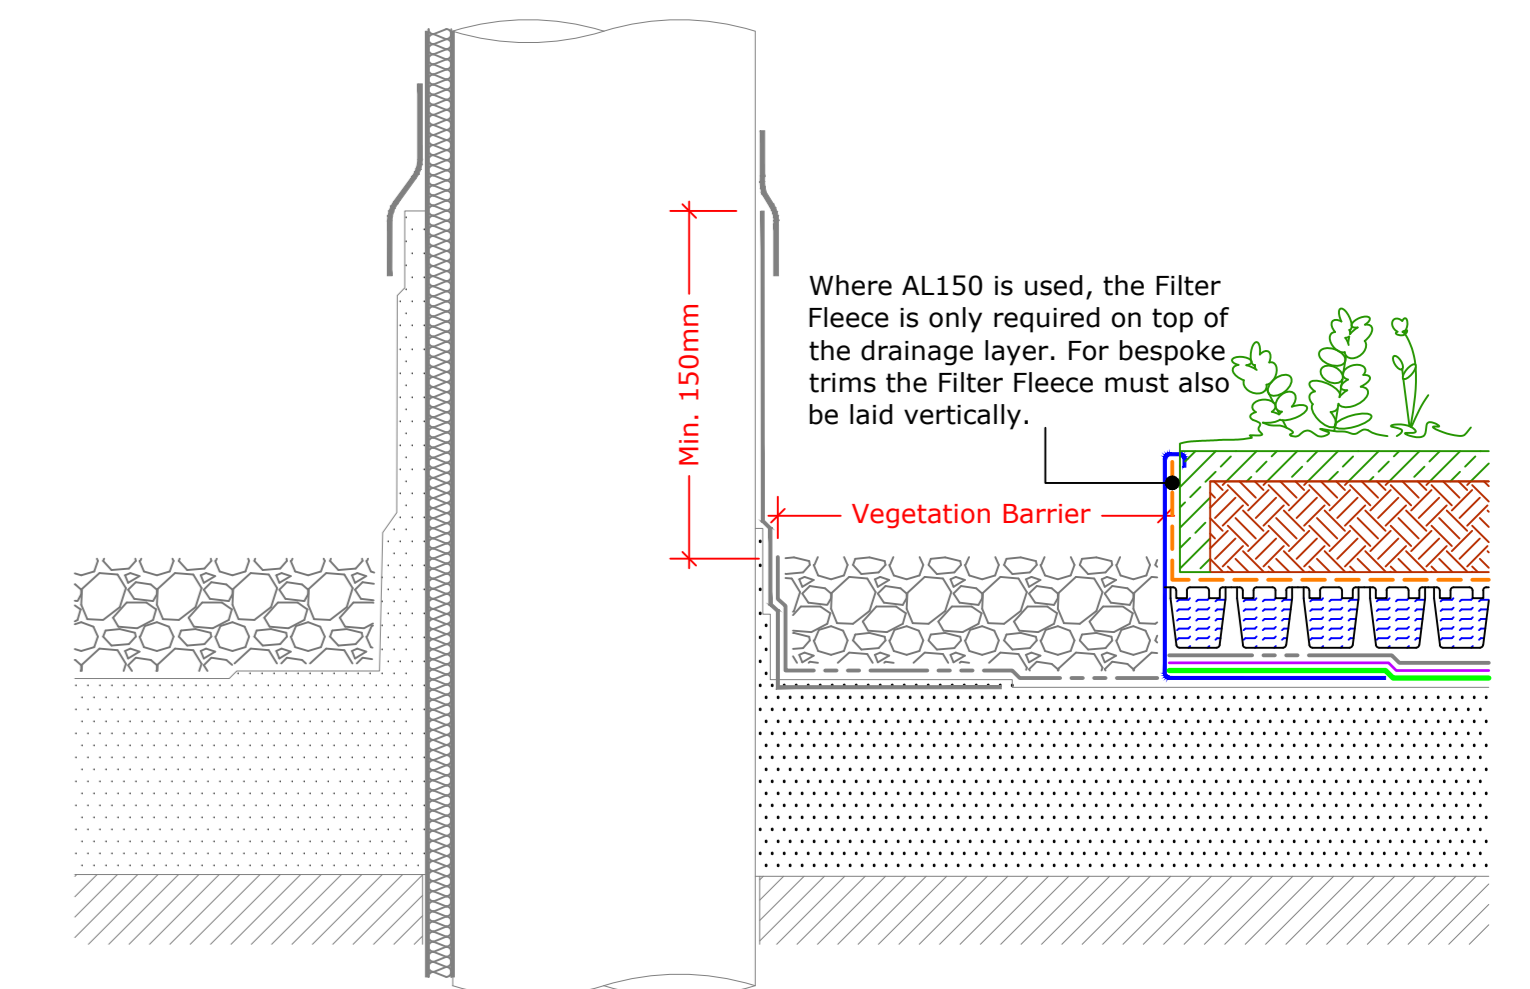


Upstand to Hot Flue or Cold Pipe
(Drg.No: D0901/03-00W_0-4Deg_007-ExtInt-S-DB_002)

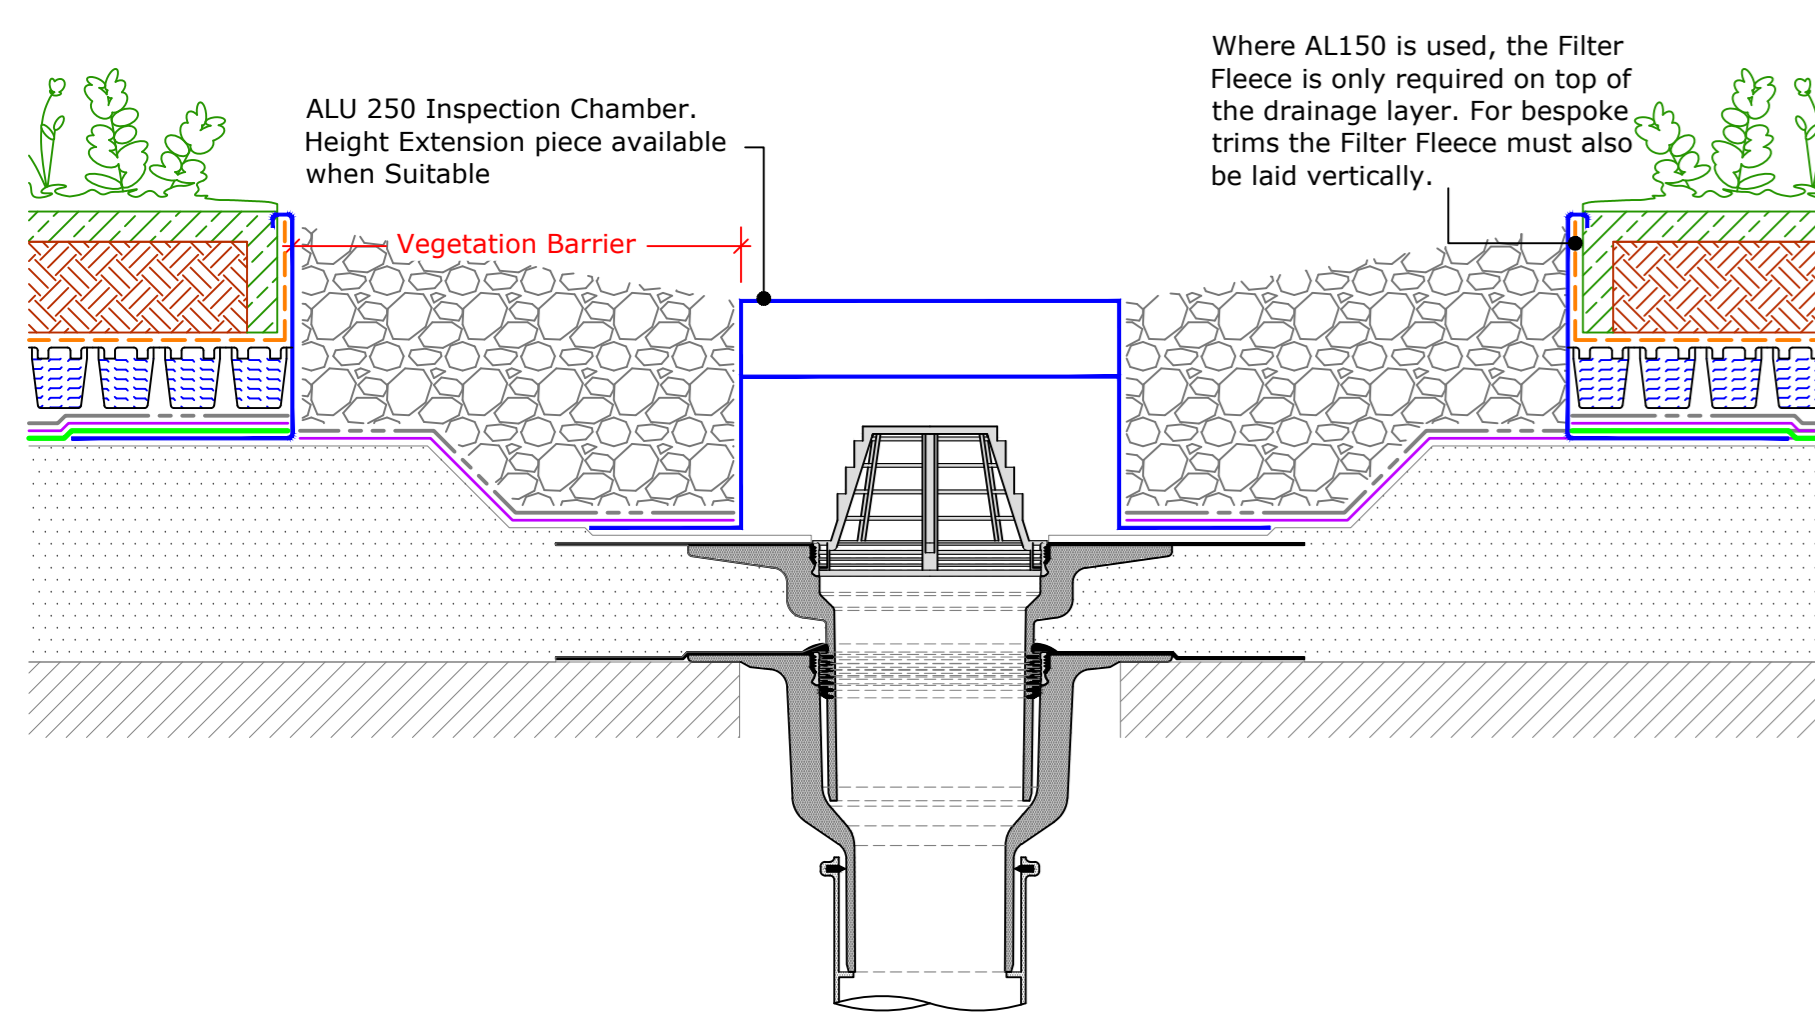


Bauder Outlet - Compact
(Drg.No: D0901/03-00W_0-4Deg_006-ExtInt-S-DB_001)

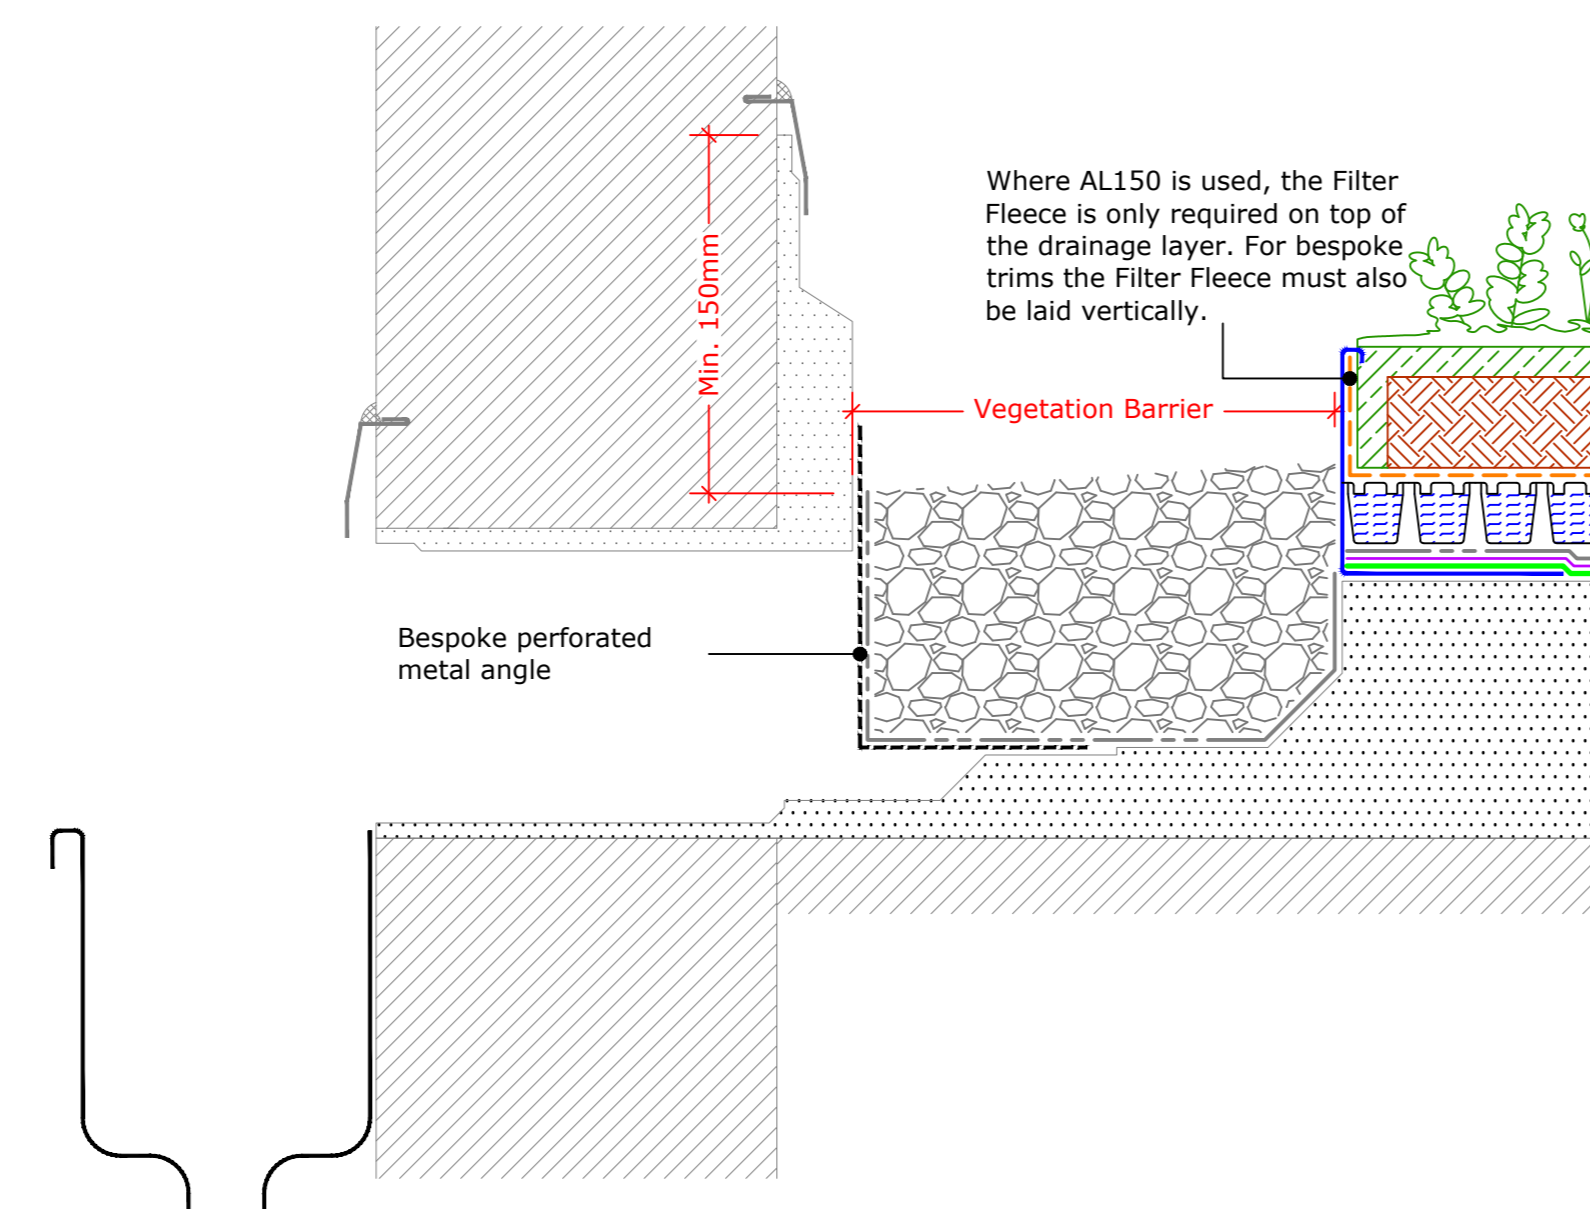


Upstand - Lead Chute
(Drg.No: D0901/03-00W_0-4Deg_206-ExtInt-S-DB_002)

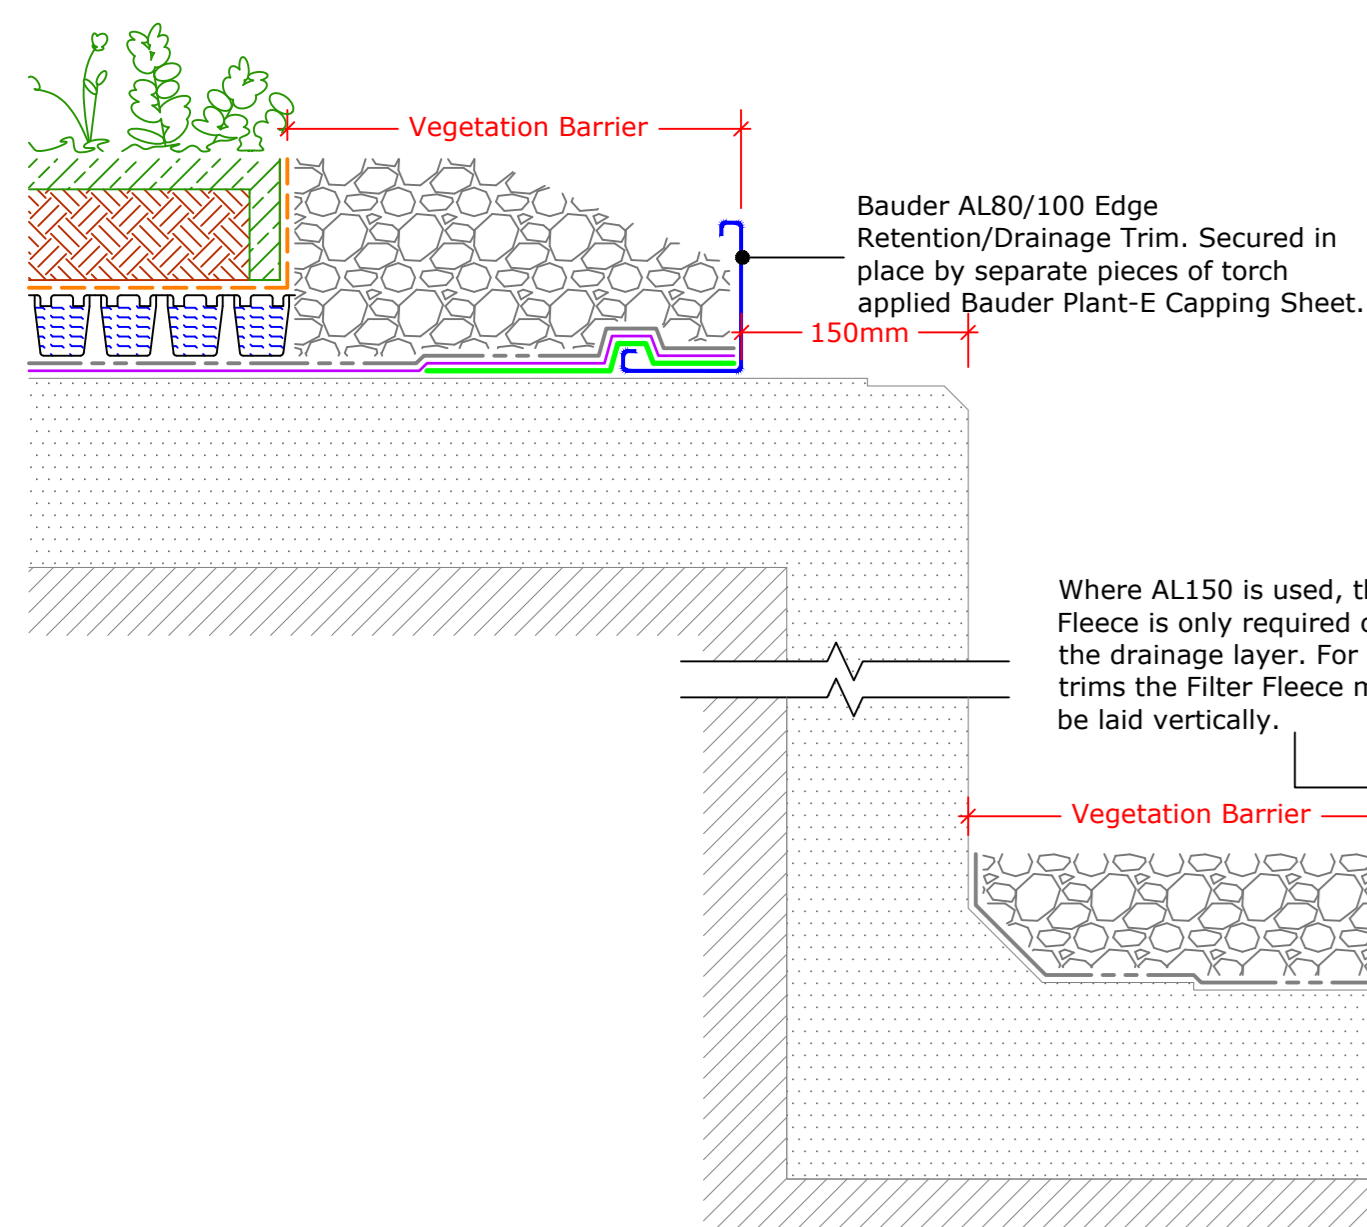


Change In Levels
(Drg.No: D0901/03-00W_0-4Deg_210-ExtInt_001)

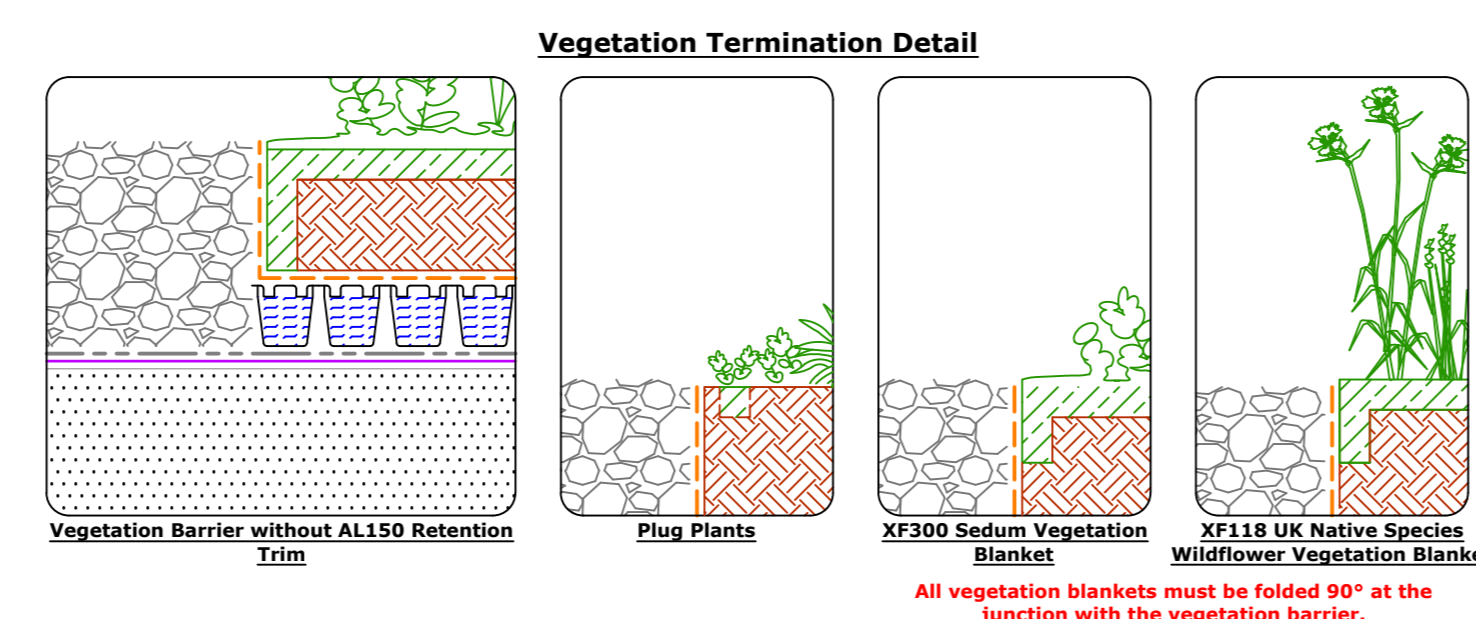


Vegetation Termination Detail

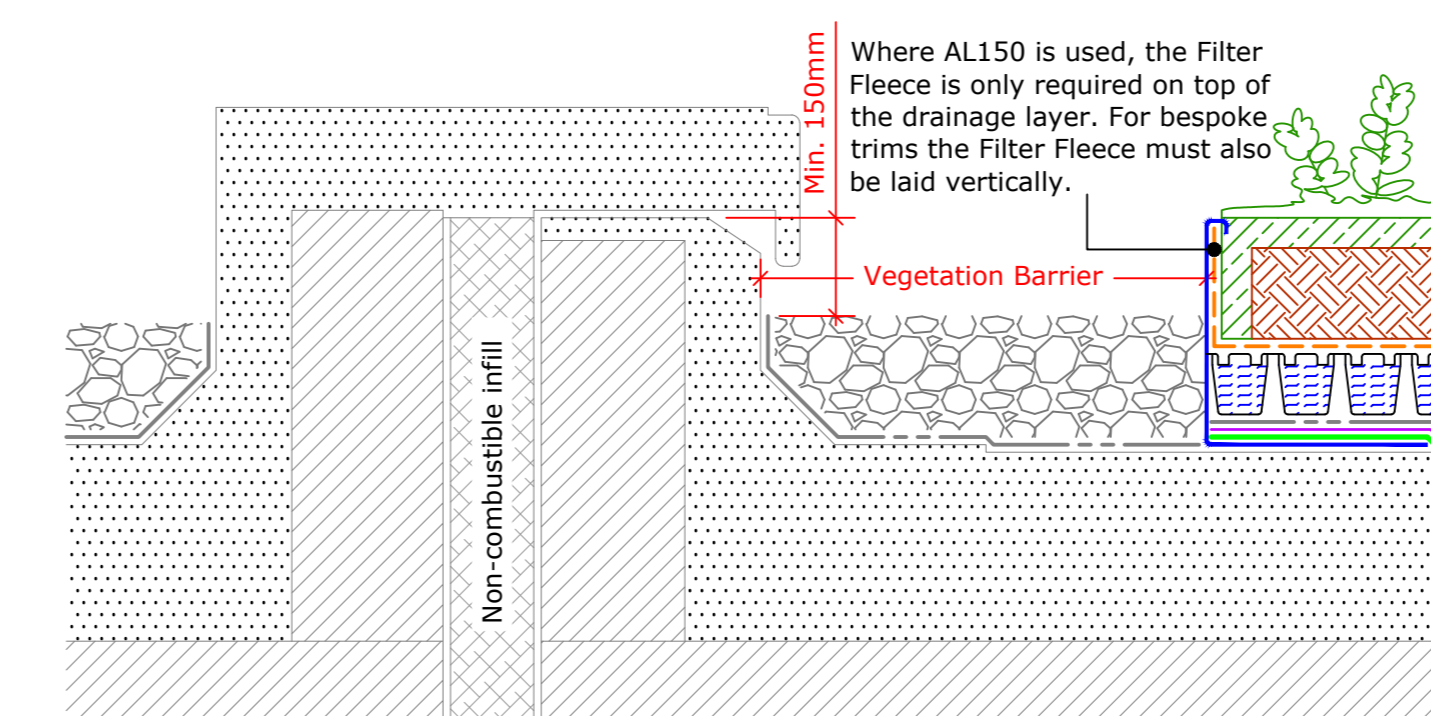

Twin Kerb Expansion Joint
(Drg.No: D0901/03-00W_0-4Deg_204-ExtInt-S-DB_001)

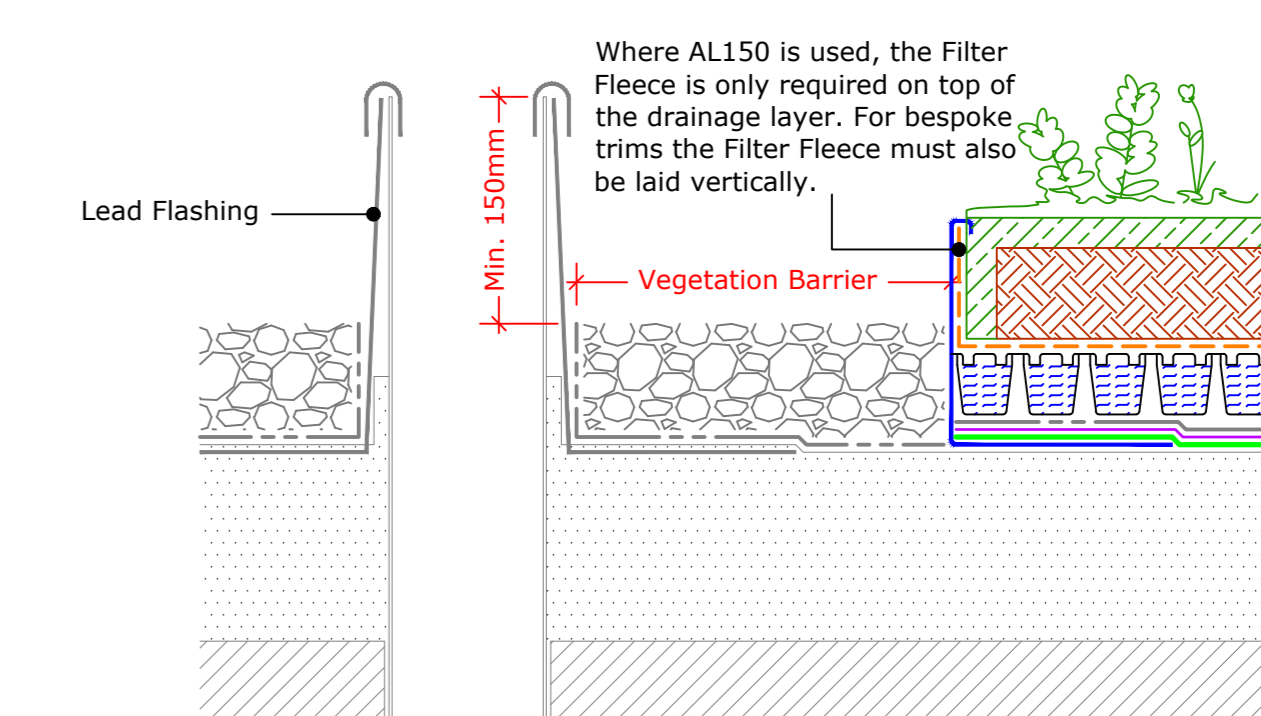

Soil Vent Pipe
(Drg.No: D0901/03-00W_0-4Deg_007-ExtInt-S-DB_001)

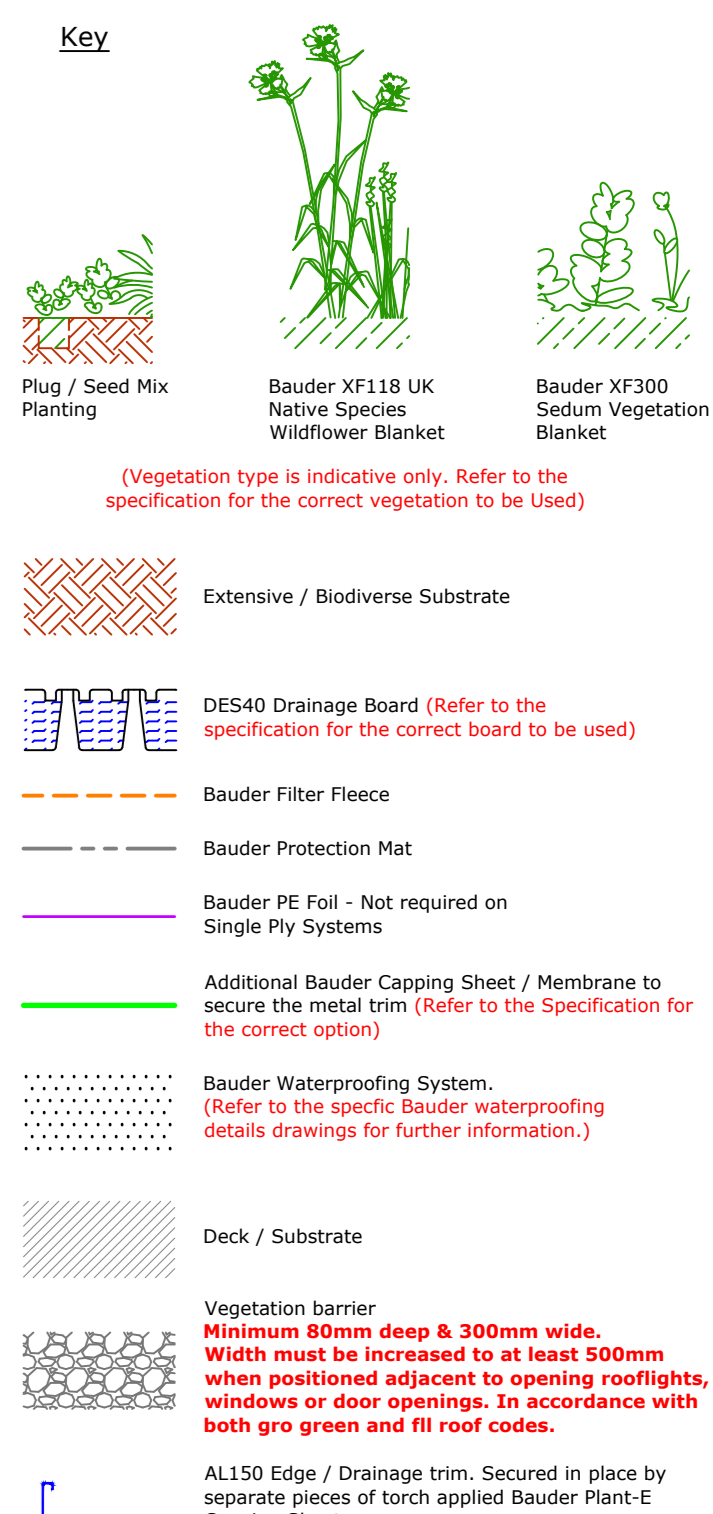

IMPORTANT NOTES:
This drawing shows alternative details. For the correct solution to be used, refer to the project specific specification.

IMPORTANT NOTES:

- This detail is for the following Bauder Systems:
Bauder Total Green Roof System
Bauder Green
Thermofel and Thermopan (Excluding Intensive)
- This drawing shows Alternative Options. For the Correct Solution to be used, Refer to the Project Specific Specification.
- Do not scale to ascertain dimensions.
- All dimensions to be checked and verified on site prior to commencement of work.
- This drawing is to be read in conjunction with the specification and associated drawings.
- This detail is a guideline only, representing typical detailing conditions and illustrate the correct application of the above Bauder System. It may be necessary to modify this detail to suit specific project design constraints and conditions.
- Refer to the Bauder Specification for the product description and method of application. For clarity the method of attachment has not been shown.
- Provision should be made by the installer for mechanically fixing the top

Rev	Date	Description	Drawn By

BAUDER

UK OFFICE
Bauder Limited
70 Lansdown Road, Ipswich,
Suffolk, IP1 0DN,
England,
Tel: +44 (0)1473 257671
Fax: +44 (0)1473 230761
Email: enquiries@bauder.co.uk
bauder.co.uk

IRELAND OFFICE
Bauder Limited
O'Duffy Centre, Cross Lane,
Carrigrohane, Co. Monaghan,
Ireland
Tel: +353 (0)42 9692 333
Fax: +353 (0)42 9692 879
Email: enquiries@bauder.ie
bauder.ie

Extensive/Intensive Green Roof System (0°-4° Slope)

System	Building Depth (from)	Saturated Weight (from)
Extensive Soft Landscaping	125mm	115kg/m ² (Excluding Waterproofing System & Planting)
Biodiverse Substrate	145mm	140kg/m ² (Excluding Waterproofing System & Planting)
Extensive/Biodiverse Substrate	145mm	140kg/m ² (Excluding Waterproofing System & Planting)
Intensive Substrate	245mm	270kg/m ² (Excluding Waterproofing System & Planting)
Intensive Substrate	345mm	395kg/m ² (Excluding Waterproofing System & Planting)
Intensive Substrate	765mm	931kg/m ² (Excluding Waterproofing System & Planting)

© Copyright. This drawing is subject to copyright. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form, without the prior written permission of BAUDER LTD.

Substrate Based Landscape Options

(Heights and weight loadings may vary, allowance must be made for any fully established planting / vegetation and landscaping)